


EN: This Datasheet is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

2


Top View of Assembly




SECTION A-A End View of Assembly







Top View Looking Inside Box

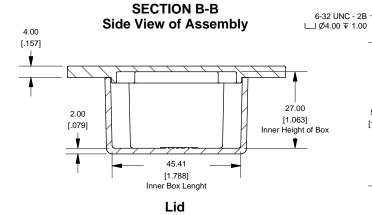

65.25 [2.569]

[1.670]

42.41


[1.670]


6.50

[.256]

19.25

[.758]





Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.

NOTE

Purchased assembly includes box, lid and 4 cover screws. Box and lid are made from Diecast Aluminum Alloy (alloy type 380). Silicone Gasket Loctite #5950

· ·	
PART NUMBERS	
1590LBFL Enclosure	
Unfinished	1590LBFL
Grey Textured Polyester Powder Paint - RAL 7038	1590LBFLGY
Black Textured Polyester Powder Paint - RAL 9011	1590LBFLBK
1590LBFL Liquid Resistant Enclosure (Silicon Factory Installed Gasket)	
Unfinished	1590WLBFL
Black Textured Powder Paint	1590WLBFLBK
ACCESSORIES	
Recommended Torque: 75 ozf.in / 55 cN.m	
Black Textured Cover Screws (Pkg 50) [6-32 x 1/2" SS Type 304]	1590WMS100BK
Unfinshed Cover Screws (Pkg 100) [6-32 x 1/2" Nickel Plated Screws]	1590WMS100
Standard Cover Screws	
Unfinshed Cover Screws (Pkg 100) [6-32 x 1/2" Nickel Plated Screws]	1590MS100
Black Textured Cover Screws (Pkg 50) [6-32 x 1/2" SS Type 304]	1590MS100BK
HAMMOND	

HAMMOND
MANUFACTURING TM
1590LBFL
www.hammondmfg.com

2