



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

SR1 Series Single-Phase, Detachable Heatsink Type SSR

Single-Phase, Detachable Heatsink Type SSR

■ Features

- Dielectric strength: 4000 VAC (also 2,500VAC model)
- Compact, universal design for flexible installation
- High heat dissipation efficiency with ceramic PCB
- Zero cross turn-on, random turn-on models available
- Input Indicator (green LED)

 Please read "Safety considerations" in operation manual before using.



■ Ordering Information

SR	1	-	1	2	25		-	N
								Version
								N New
								Function
								No Mark
								Zero cross turn-on
								R
								Random turn-on
								Rated load current (resistive load)
								15
								15A
								25
								25A
								40
								40A
								50
								50A
								75
								75A
								Rated load voltage
								2
								24-240VAC
								4
								48-480VAC
								Rated input voltage
								1
								4-30VDC
								4
								90-240VAC
								Control phase
								1
								Single-phase
								Item
								SR
								Solid State Relay (detachable heatsink type)

Model	Rated input voltage	Rated load voltage	Rated input current	Function
SR1-1215-N	4-30VDC	15A	24-240VAC	Zero cross turn-on
SR1-4215-N	90-240VAC			
SR1-1225-N	4-30VDC	25A		
SR1-4225-N	90-240VAC			
SR1-1240-N	4-30VDC	40A		
SR1-4240-N	90-240VAC			
SR1-1250	4-30VDC	50A		
SR1-4250	90-240VAC			
SR1-1275	4-30VDC	75A		
SR1-4275	90-240VAC			
SR1-1415	4-30VDC	15A	48-480VAC	Zero cross turn-on
SR1-1415R				Random turn-on
SR1-4415	90-240VAC	Zero cross turn-on		
SR1-1425	4-30VDC	25A		Zero cross turn-on
SR1-1425R				Random turn-on
SR1-4425	90-240VAC	Zero cross turn-on		
SR1-1440	4-30VDC	40A		Zero cross turn-on
SR1-1440R				Random turn-on
SR1-4440	90-240VAC	Zero cross turn-on		
SR1-1450	4-30VDC	50A		Zero cross turn-on
SR1-1450R				Random turn-on
SR1-4450	90-240VAC	Zero cross turn-on		
SR1-1475	4-30VDC	75A		Zero cross turn-on
SR1-1475R				Random turn-on
SR1-4475	90-240VAC	Zero cross turn-on		

(A) Photoelectric Sensors

(B) Fiber Optic Sensors

(C) Door/Area Sensors

(D) Proximity Sensors

(E) Pressure Sensors

(F) Rotary Encoders

(G) Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets

(H) Temperature Controllers

(I) SSRs / Power Controllers

(J) Counters

(K) Timers

(L) Panel Meters

(M) Tacho / Speed / Pulse Meters

(N) Display Units

(O) Sensor Controllers

(P) Switching Mode Power Supplies

(Q) Stepper Motors & Drivers & Controllers

(R) Graphic/ Logic Panels

(S) Field Network Devices

(T) Software

SR1 Series

■ Specifications

◎ Input

● SR1-□□□□-N

Rated input voltage range	4-30VDC [※]	90-240VACrms~ (50/60Hz)
Allowable input voltage range	4-32VDC [※]	85-264VACrms~ (50/60Hz)
Max. input current	18mA	18mA (240VACrms~)
Pick-up voltage	Min. 4VDC [※]	Min. 85VACrms~
Drop-out voltage	Max. 1VDC [※]	Max. 10VACrms~
Turn-on time	Zero cross turn-on	Max. 0.5 cycle of load source + 1ms
Turn-off time		Max. 2 cycle of load source + 1ms

● SR1-□□□□

Rated input voltage range	4-30VDC [※]	90-240VACrms~ (50/60Hz)
Allowable input voltage range	4-32VDC [※]	85-264VACrms~ (50/60Hz)
Max. input current	9mA (Zero cross turn-on), 13mA (Random turn-on)	7mA (240VACrms~)
Pick-up voltage	Min. 4VDC [※]	Min. 85VACrms~
Drop-out voltage	Max. 1VDC [※]	Max. 10VACrms~
Turn-on time	Zero cross turn-on	Max. 0.5 cycle of load source + 1ms
	Random turn-on	Max. 1.5 cycle of load source + 1ms
Turn-off time		—
		Max. 1.5 cycle of load source + 1ms

◎ Output

Rated load voltage range	24-240VACrms~ (50/60Hz)	48-480VACrms~ (50/60Hz)
Allowable load voltage range	24-264VACrms~ (50/60Hz)	48-528VACrms~ (50/60Hz)
Rated load current	Resistive load (AC-51) ^{※1}	15Arms 25Arms 40Arms 50Arms 75Arms 15Arms 25Arms 40Arms 50Arms 75Arms
Min. load current	0.15Arms 0.2Arms 0.5Arms 0.5Arms 0.5Arms 0.5Arms 0.5Arms 0.5Arms 0.5Arms 0.5Arms 0.5Arms	
Max. 1 cycle surge current (60Hz)	160A 250A 400A 1000A 1000A 300A 500A 500A 1000A 1000A	
Max. non-repetitive surge current (I ² t, t=8.3ms)	130A ² s 300A ² s 910A ² s 4000A ² s 4000A ² s 350A ² s 1000A ² s 1000A ² s 4000A ² s 4000A ² s	
Peak voltage (Non-repetitive)	600V	1200V (Zero cross turn-on), 1000V (Random turn-on)
Leakage current (Ta=25°C)	Max. 10mA (240VAC~/60Hz)	Max. 10mA (480VAC~/60Hz)
Output on voltage drop [Vpk] (Max. load current)	Max. 1.6V	Max. 1.6V
Static off state dv/dt	500V/μs	500V/μs

※1: AC-51 is utilization category at IEC60947-4-3.

◎ General Specifications

Dielectric strength (Vrms)	• SR1-□□□□-N: 2500VAC~ 50/60Hz 1 min (Input-Output, Input/Output-Case) • SR1-□□□□: 4000VAC~ 50/60Hz 1 min (Input-Output, Input/Output-Case)
Insulation resistance	Over 100MΩ (at 500VDC megger) (Input-Output, Input/Output-Case)
Indicator	Input indicator: Green LED
Vibration	Mechanical 0.75mm amplitude at frequency of 10 to 55Hz (for 1 min) in each X, Y, Z direction for 1 hour Malfunction 0.5mm amplitude at frequency of 10 to 55Hz (for 1 min) in each X, Y, Z direction for 10 min
Shock	Mechanical 300m/s ² (approx. 30G) in each X, Y, Z direction for 3 times Malfunction 100m/s ² (approx. 30G) in each X, Y, Z direction for 3 times
Environment	Ambient temp. -30 to 80°C (in case of the rated input voltage 90-240VAC~: -20 to 70°C), storage: -30 to 100°C (The rated load current capacity is different depending on ambient temperature. Refer to 1■ SSR Derating Curve'.) Ambient humi. 45 to 85%RH, storage: 45 to 85%RH
Input terminal connection	Min. 1×0.5mm ² (1×AWG20), Max. 1×1.5mm ² (1×AWG16) or 2×1.5mm ² (2×AWG16)
Output terminal connection	Min. 1×1.5mm ² (1×AWG16), Max. 1×16mm ² (1×AWG6) or 2×6mm ² (2×AWG10)
Input terminal fixed torque	0.75 to 0.95N·m
Output terminal fixed torque	1.6 to 2.2N·m
Approval	CE c RU US (except SR1-□□□□-N)
Weight ^{※1}	Approx. 111g (approx. 73g)

※1: The weight includes packaging. The weight in parenthesis is for unit only.

※Environment resistance is rated at no freezing or condensation.

※For wiring the terminal, an O-ring terminal must be used.

Single-Phase, Detachable Heatsink Type SSR


■ SSR Derating Curve

※ Be sure that the ambient temperature and the derating curve is different by the rated input voltage.

- : Rated input voltage 4-30VDC (SR1-1□□□□)
- : Rated input voltage 90-240VAC (SR1-4□□□□)


◎ SR1-1215-N

SR1-4215-N

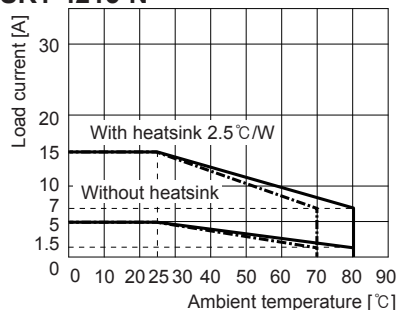


◎ SR1-1225-N

SR1-4225-N

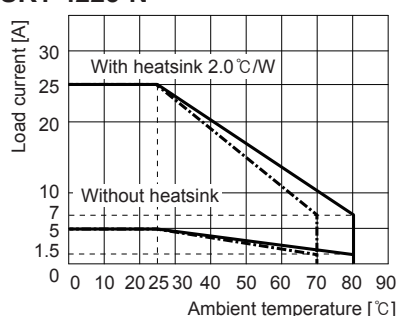


◎ SR1-1240-N

SR1-4240-N

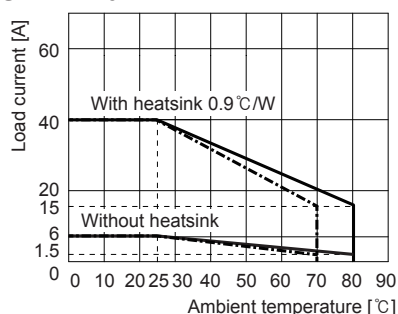


◎ SR1-1250/1450/1450R

SR1-4250/4450

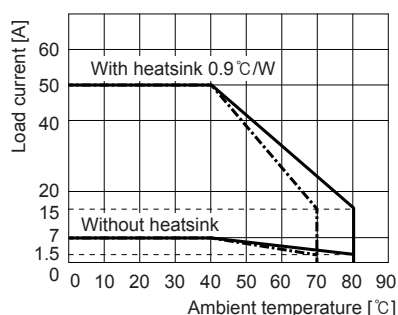


◎ SR1-1415/1415R

SR1-4415

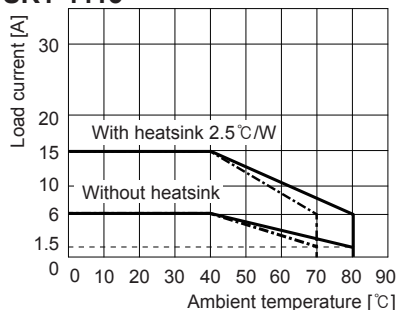


◎ SR1-1425/1425R

SR1-4425

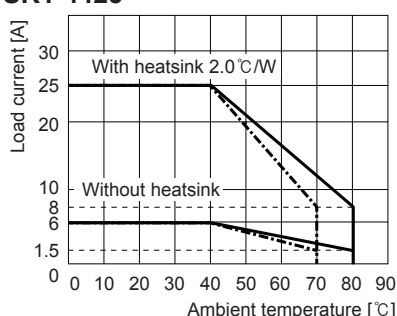


◎ SR1-1440/1440R

SR1-4440

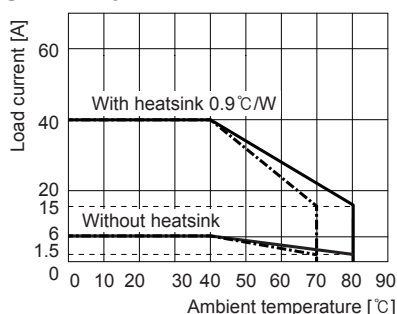

◎ SR1-1275/1475/1475R

SR1-4275/4475

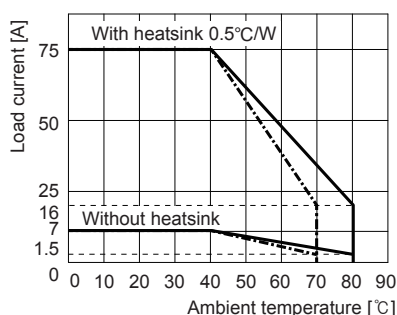

⚠ Please supply less than 50% of the rated load current when installing several SSRs closely due to decreasing effectiveness of protection against heat.

(A) Photoelectric Sensors

(B) Fiber Optic Sensors

(C) Door/Area Sensors

(D) Proximity Sensors

(E) Pressure Sensors

(F) Rotary Encoders

(G) Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets

(H) Temperature Controllers

(I) SSRs / Power Controllers

(J) Counters

(K) Timers

(L) Panel Meters

(M) Tacho / Speed / Pulse Meters

(N) Display Units

(O) Sensor Controllers

(P) Switching Mode Power Supplies

(Q) Stepper Motors & Drivers & Controllers

(R) Graphic/ Logic Panels


(S) Field Network Devices

(T) Software


SR1 Series

■ Dimensions

(unit: mm)

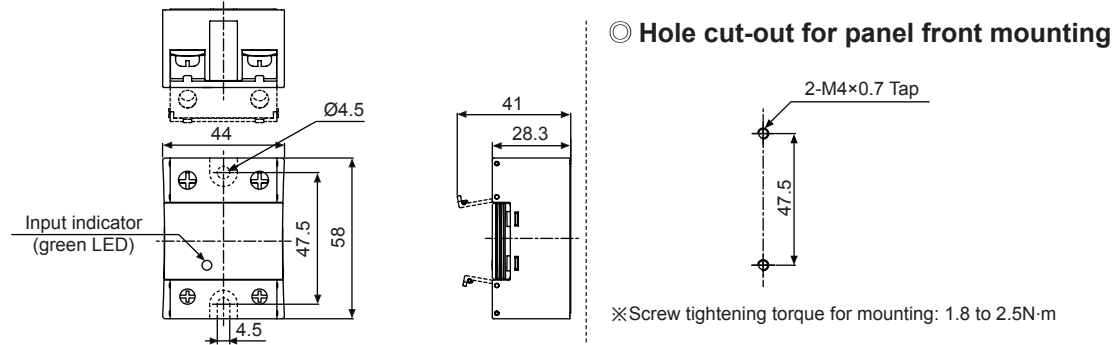

■ Connections

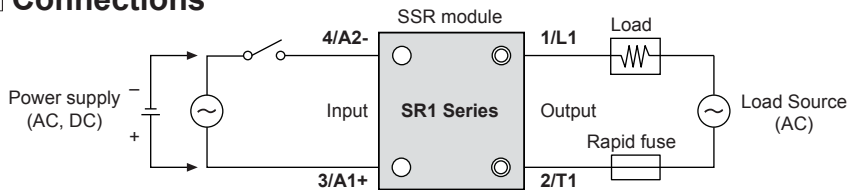

■ Proper Usage

⚠ High temperature caution

Make sure do not touch the heat sink or the unit body while power is supplied or right after load power is turned off. If not, it may cause a burn.

⚠ Cautions during use

1. Attach a heatsink and ventilate for smooth convection current. If not, congested heat transfer may cause product failure or malfunction.
2. For mounting multiple SSR, please keep certain installation intervals for heat prevention. For horizontal installation (when the heights of input part and output part are equal), it is recommended to apply less than 50% of the rated load current.
3. Make sure do not touch the heatsink or the unit body while power is supplied or right after load power is turned OFF. If not, it may cause a burn.
4. Connect the proper cable for the rated load current with output terminal.
5. Use rapid fuse of which I^2t is under 1/2 of SSR I^2t in order to protect the unit from load's short-circuit current. In case of a short-circuit please replace the fuse which has same specification.
6. In case that load's current is lower than SSR min. load current, connect dummy resistance to the load in parallel so as to make load's current higher than SSR min. load current.
7. When selecting phase control with random turn-on model, install the noise filter between load and load's source.
8. Make sure that the screw on output terminal is tightly fastened. Using the unit with loose bolt may cause product failure or malfunction.
9. Do not touch the load's terminal even if output is OFF. It may cause electric shock.
10. In case of 4-30VDC model, the signal input should be insulated and limited voltage/current or Class 2, SELV power supply device.
11. To attach the heatsink, use Thermal Grease as below or that of equal specification.
※Thermal Grease: GE TOSHIBA (YG6111), KANTO-KASEI (FLOIL G-600), SHINETSU (G746)
12. Avoid following environments to install this unit.
 - ① Where temperature/humidity is beyond the specification
 - ② Where dew condensation occurs due to temperature change
 - ③ Where inflammable or corrosive gas exists
 - ④ Where direct rays of light exist
 - ⑤ Where severe shock, vibration or dust exists
 - ⑥ Where near facilities generating strong magnetic forces or electric noise
13. This product may be used in the following environments.
 - ① Indoors
 - ② Max. altitude: 2,000m
 - ③ Pollution degree 2
 - ④ Installation category III