



**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

# TLE5501

## TMR-Based Angle Sensor




RoHS



ISO26262  
compliant

### Features

- Tunneling Magneto Resistance (TMR)-based principle
- 360° angle measurement
- Large output signals of up to 0.37 V/V for direct micro controller connection
- Discrete bridge with differential sine and cosine output
- Ratiometric output signals
- Two different pin-outs:
  - E0001: pin compatible to TLE5009, AEC-Q100 compliant (QM)
  - E0002: de-coupled bridges for redundant external angle calculation and highest diagnostic coverage, ISO26262 ASIL-D compliant (requires use of external safety mechanisms)
- Automotive qualified AEC-Q100, Grade 0:  $T_A = -40^{\circ}\text{C}$  to  $150^{\circ}\text{C}$  (ambient temperature)
- ESD > 4 kV (HBM)
- RoHS compliant and halogen free package

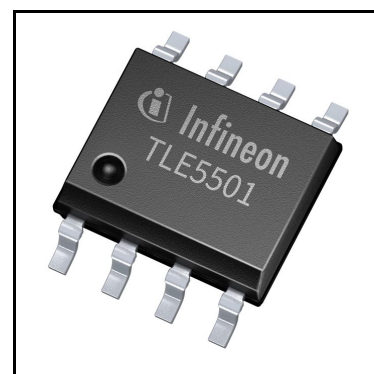

### Functional Safety

- Safety Manual and Safety Analysis Summary Report available on request

### Potential applications

The TLE5501 TMR-based angle sensor is designed for angular position sensing in automotive applications with focus on steering angle sensor and BLDC motor commutation.

### Product validation

Qualified for automotive applications. Product validation according to AEC-Q100.

### Description

**Table 1** Derivative Ordering codes

| Product type  | Marking | Ordering code | Package  | Functional Safety Classification | Comment                   |
|---------------|---------|---------------|----------|----------------------------------|---------------------------|
| TLE5501 E0001 | 5010001 | SP001621824   | PG-DSO-8 | n.a.                             | pin compatible to TLE5009 |
| TLE5501 E0002 | 5010002 | SP001621828   | PG-DSO-8 | ISO26262 Compliant               | de-coupled bridges        |

## Table of contents

|          |                                              |           |
|----------|----------------------------------------------|-----------|
| <b>1</b> | <b>Product overview</b> .....                | <b>3</b>  |
| <b>2</b> | <b>Block diagram</b> .....                   | <b>4</b>  |
| <b>3</b> | <b>Pin configuration / description</b> ..... | <b>5</b>  |
| <b>4</b> | <b>Application circuit</b> .....             | <b>6</b>  |
| <b>5</b> | <b>General product characteristics</b> ..... | <b>8</b>  |
| 5.1      | Absolute maximum ratings .....               | 8         |
| 5.2      | Functional range .....                       | 9         |
| 5.3      | Thermal resistance .....                     | 9         |
| <b>6</b> | <b>Functional behavior</b> .....             | <b>10</b> |
| 6.1      | Functional description .....                 | 10        |
| 6.2      | Safety functions .....                       | 10        |
| 6.3      | Failure reactions .....                      | 10        |
| 6.4      | Electrical parameters .....                  | 10        |
| <b>7</b> | <b>Typical performance</b> .....             | <b>14</b> |
| 7.1      | Angle error .....                            | 14        |
| 7.2      | Hysteresis .....                             | 15        |
| <b>8</b> | <b>Package</b> .....                         | <b>16</b> |
| 8.1      | Package info .....                           | 16        |
| 8.2      | Package marking .....                        | 17        |
| 8.3      | Packing .....                                | 17        |
| 8.4      | Die Position inside package .....            | 17        |
| <b>9</b> | <b>Revision history</b> .....                | <b>18</b> |

## **1 Product overview**

The TLE5501 is a 360° TMR-based angle sensor that detects the orientation of a magnetic field. This is achieved by measuring sine and cosine angle components with Tunneling Magneto Resistance (TMR) elements. These raw signals (sine and cosine) are provided as a differential output signal and can directly be further processed within a micro controller. The large output voltage of the bridge renders any further signal amplification unnecessary.

The TLE5501 is available in two different derivatives:

- TLE5501 E0001 has one VDD pin and is pin-compatible with the GMR-based TLE5009. This option offers a easy change to the TLE5501. The only difference to TLE5009 is the pin 5, which is not used in TLE5501 and provides a temperature and diagnosis function in TLE5009.
- TLE5501 E0002 is a version which has two independent VDD and GND pins, for the P- and N-bridge respectively. In this way, two completely independent bridge signals are generated which can be used in an advanced safety concept to perform a cross-check of the P- and N- signals and achieve a high diagnostic coverage for any sensor malfunction.

## Block diagram

### 2 Block diagram

The TLE5501 consists of 8 TMR resistors, which are arranged in 2 Wheatstone bridges. The resistance of these resistors depends on the direction of the external magnetic field. Each bridge provides a differential output signal, i.e. X (cosine) and Y (sine) signals which can further be processed for angle calculation.

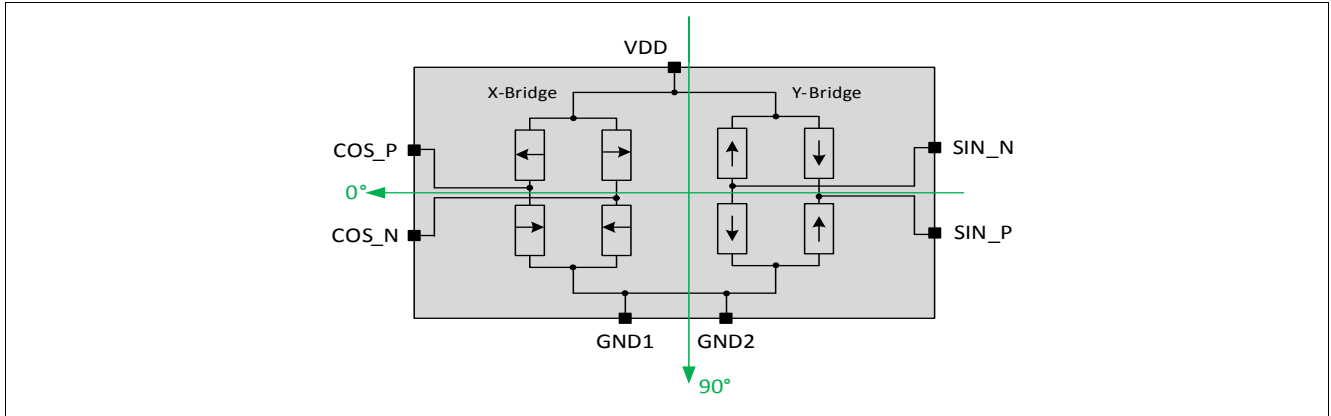


Figure 1 Principle block diagram of discrete TMR bridge, version TLE5501 E0001

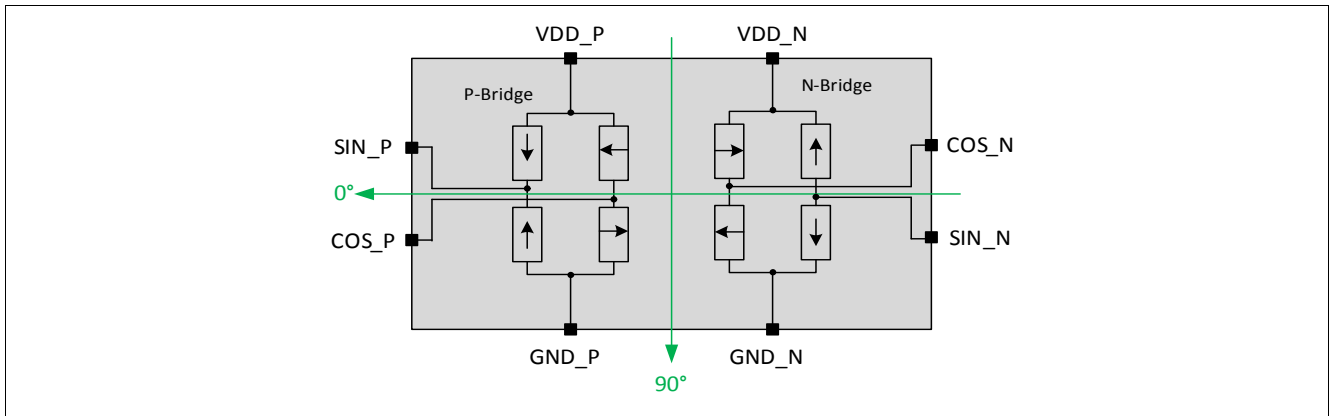


Figure 2 Principle block diagram of discrete TMR bridge, de-coupled version TLE5501 E0002

### 3 Pin configuration / description

The pin-out of the device is shown in [Table 2](#).

A magnet which rotates counter-clockwise (CCW) leads to an increasing angle value.

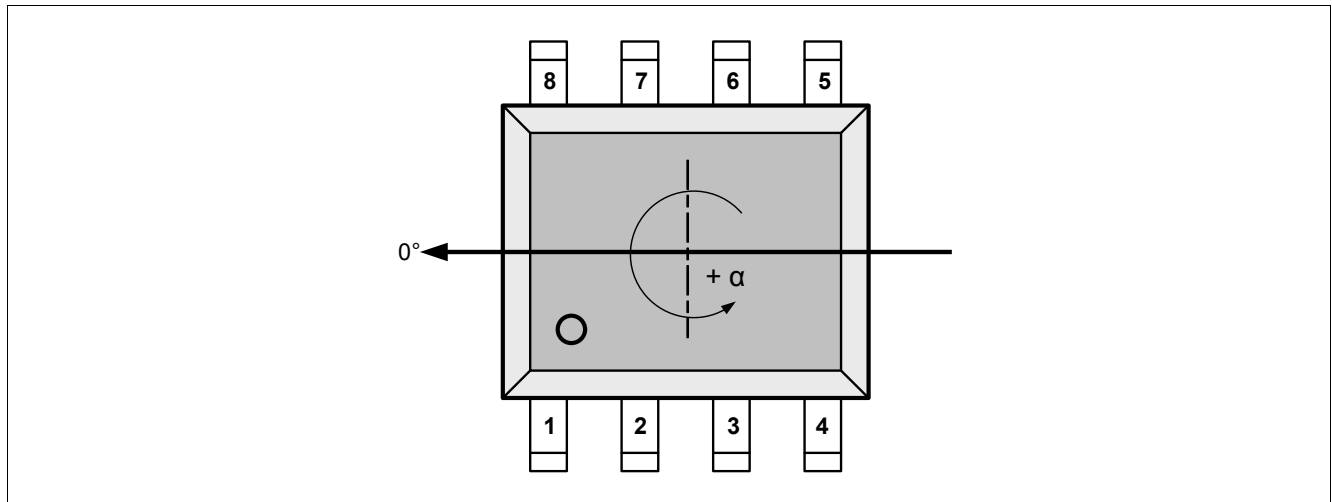


Figure 3 Pin-out of the discrete TMR bridge

Table 2 Pin description (compatible version TLE5501 E0001)

| Pin No. | Symbol | In/Out | Function                               |
|---------|--------|--------|----------------------------------------|
| 1       | COS_P  | O      | Analog positive cosine output          |
| 2       | COS_N  | O      | Analog negative cosine output          |
| 3       | GND2   | I      | Ground, internally connected to GND1   |
| 4       | GND1   | I      | Ground                                 |
| 5       | n.c    |        | not used, internally connected to GND2 |
| 6       | VDD    | I      | Supply voltage                         |
| 7       | SIN_N  | O      | Analog negative sine output            |
| 8       | SIN_P  | O      | Analog positive sine output            |

Table 3 Pin description (de-coupled version TLE5501 E0002)


| Pin No. | Symbol | In/Out | Function                      |
|---------|--------|--------|-------------------------------|
| 1       | SIN_P  | O      | Analog positive sine output   |
| 2       | VDD_P  | I      | Supply voltage P-bridge       |
| 3       | COS_P  | O      | Analog positive cosine output |
| 4       | GND_P  | I      | Ground P-bridge               |
| 5       | COS_N  | O      | Analog negative cosine output |
| 6       | VDD_N  | I      | Supply voltage N-bridge       |
| 7       | SIN_N  | O      | Analog negative sine output   |
| 8       | GND_N  | I      | Ground N-bridge               |

## Application circuit


### 4 Application circuit

**Figure 4** to **Figure 7** show the application circuit which is proposed for TLE5501. The value for the buffer capacitor  $C_b$  has to be adjusted according to the speed of the magnetic input signal. It represents a low-pass filter together with the TMR resistor and limits the bandwidth of the sensor, improves, however, noise performance. Even without any buffer capacitor  $C_b$ , the bandwidth of the device is determined by the TMR resistor and the input capacitor of the used ADC. It has to be considered and the ADC sample and hold time has to be adjusted accordingly.

In case the TLE5501 is used in a single-ended configuration, it is recommended to keep the unused pins open.

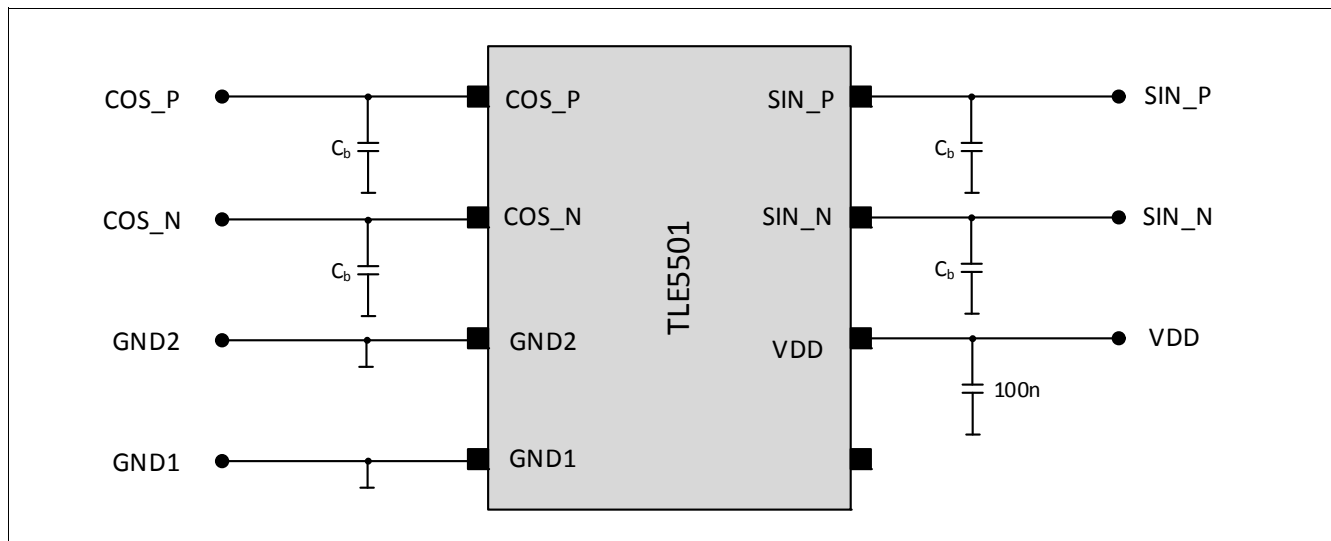

**Figure 4** Application circuit for TLE5501 E0001, both bridges used

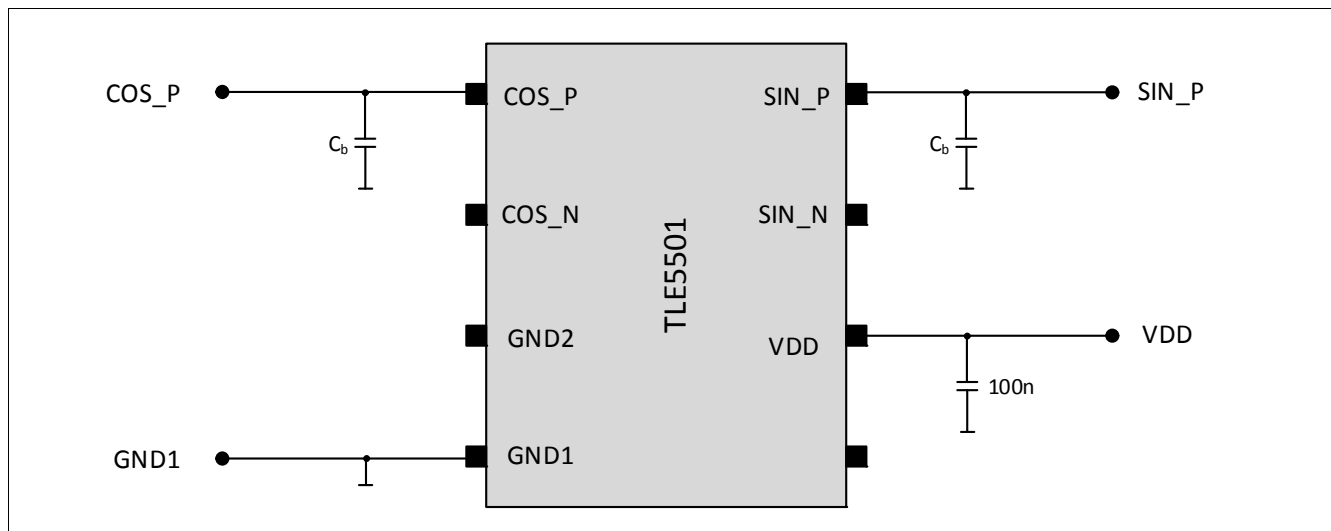

**Figure 5** Application circuit for TLE5501 E0001, only one bridge used

Application circuit

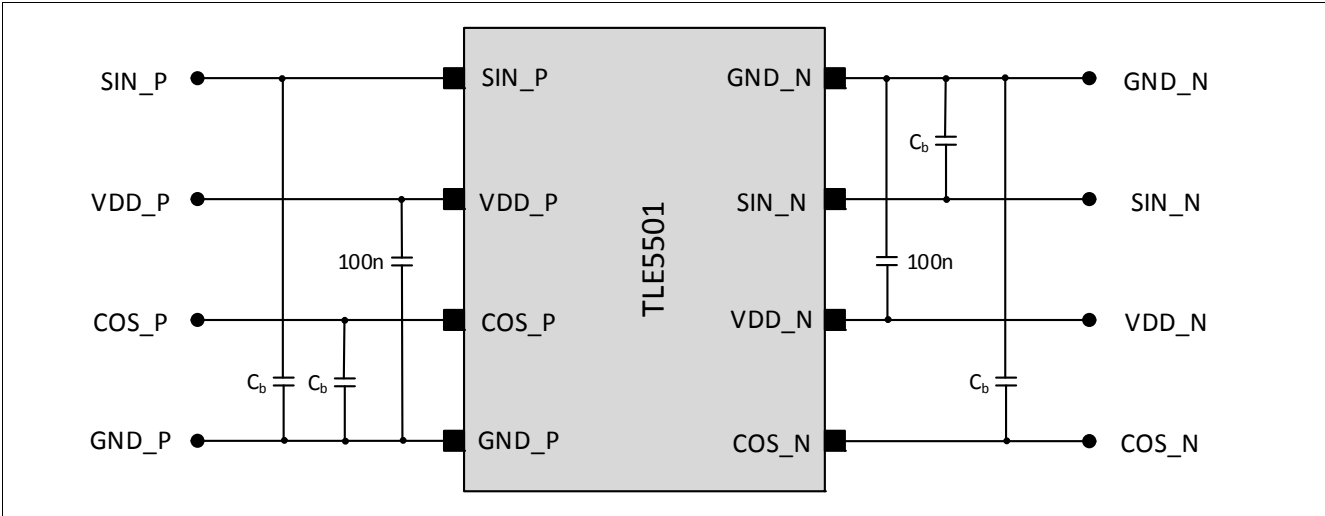


Figure 6 Application circuit for TLE5501 E0002, both bridges used

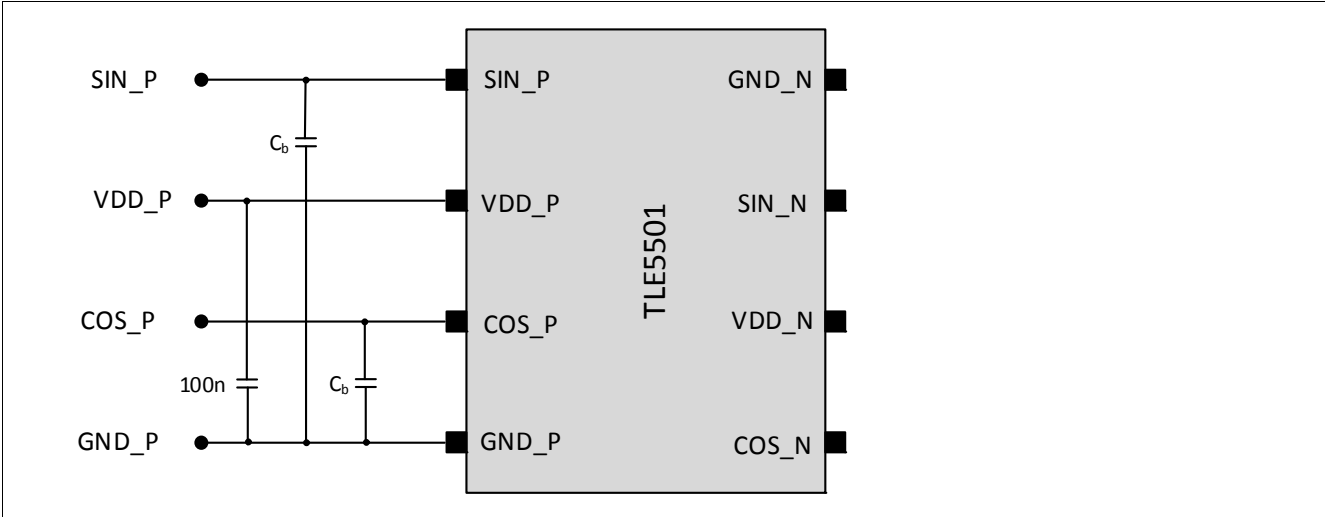


Figure 7 Application circuit for TLE5501 E0002, only one bridge used



## 5 General product characteristics

### 5.1 Absolute maximum ratings

Stresses above the maximum values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the device.

**Table 4** Maximum ratings for voltages and output current

| Parameter                        | Symbol        | Values |      |      | Unit | Note or Test Condition                                                  |
|----------------------------------|---------------|--------|------|------|------|-------------------------------------------------------------------------|
|                                  |               | Min.   | Typ. | Max. |      |                                                                         |
| Absolute maximum supply voltage  | $V_{DD}$      | -6.5   | –    | 6.5  | V    | limited to 40 h over lifetime                                           |
| Maximum ambient temperature      | $T_A$         | -40    | –    | 150  | °C   | Grade 0 qualification                                                   |
| Maximum allowed magnetic field   | $B_{max}$     | –      | –    | 200  | mT   | max 5 min @ $T_A = 25^\circ\text{C}$                                    |
| Maximum allowed magnetic field   | $B_{max}$     | –      | –    | 150  | mT   | max 5 h @ $T_A = 25^\circ\text{C}$                                      |
| Storage & Shipment <sup>1)</sup> | $T_{storage}$ | 5      | –    | 40   | °C   | for dry packed devices,<br>Relative humidity < 90 %, storage time < 3 a |

1) See Infineon Application Note: "Storage of Products Supplied by Infineon Technologies"

**Table 5** Temperature / lifetime budget

| Parameter                                   | Symbol      | Values |      |      | Unit | Note or Test Condition            |
|---------------------------------------------|-------------|--------|------|------|------|-----------------------------------|
|                                             |             | Min.   | Typ. | Max. |      |                                   |
| Temperature / lifetime budget <sup>1)</sup> | $T_{A,max}$ | –      | –    | 125  | °C   | for 1000 h, Grade 1 qualification |
|                                             |             | –      | –    | 150  | °C   | for 1000 h, Grade 0 qualification |

1) The angle accuracy depends on the maximum ambient temperature (see [Table 12](#) and [Table 13](#))

**Table 6** Lifetime & Ignition Cycles

| Parameter           | Symbol          | Values |      |      | Unit | Note or Test Condition                    |
|---------------------|-----------------|--------|------|------|------|-------------------------------------------|
|                     |                 | Min.   | Typ. | Max. |      |                                           |
| Operating life time | $t_{op\_life}$  | 15.000 | –    | –    | h    | see <a href="#">Table 5</a>               |
| Total life time     | $t_{tot\_life}$ | 19     | –    | –    | a    | additional 5 a storage time <sup>1)</sup> |
| Ignition cycles     | $N_{ignition}$  | 3.6E6  | –    | –    |      | during operating life time $t_{op\_life}$ |

1) This storage time refers to storage in the module (including magnet) after soldering of the part

General product characteristics

Table 7 ESD voltage

| Parameter                                                                         | Symbol           | Values |      |      | Unit | Note or Test Condition             |
|-----------------------------------------------------------------------------------|------------------|--------|------|------|------|------------------------------------|
|                                                                                   |                  | Min.   | Typ. | Max. |      |                                    |
| Electro-Static-Discharge voltage (HBM), according to ANSI/ESDA/JEDEC JS-001-2010) | $V_{\text{HBM}}$ | -4     | –    | 4    | kV   | HBM contact discharge for all pins |
| Electro-Static-Discharge voltage (CDM), according to JESD22-C101                  | $V_{\text{CDM}}$ | -0.5   | –    | 0.5  | kV   | for all pins except corner pins    |
|                                                                                   |                  | -0.75  | –    | 0.75 | kV   | for corner pins only               |

## 5.2 Functional range

The following operating conditions must not be exceeded in order to ensure correct operation of the angle sensor. All parameters specified in the following sections refer to these operating conditions. [Table 8](#) & [Table 9](#) is valid for  $-40^{\circ}\text{C} < T_{\text{A}} < 150^{\circ}\text{C}$ .

Table 8 Operating range

| Parameter                     | Symbol          | Values |      |      | Unit                | Note or Test Condition |
|-------------------------------|-----------------|--------|------|------|---------------------|------------------------|
|                               |                 | Min.   | Typ. | Max. |                     |                        |
| Operating supply voltage      | $V_{\text{DD}}$ | 2.7    | –    | 5.5  | V                   | –                      |
| Operating ambient temperature | $T_{\text{A}}$  | -40    | –    | 150  | $^{\circ}\text{C}$  | –                      |
| Angle speed                   | $n$             | –      | –    | 1E6  | $^{\circ}/\text{s}$ | –                      |

Table 9 Magnetic field range

| Parameter                     | Symbol                | Values |      |      | Unit | Note or Test Condition                                                       |
|-------------------------------|-----------------------|--------|------|------|------|------------------------------------------------------------------------------|
|                               |                       | Min.   | Typ. | Max. |      |                                                                              |
| Magnetic field range          | $B$                   | 20     | –    | 100  | mT   |                                                                              |
| Extended magnetic field range | $B_{\text{extended}}$ | 20     | –    | 130  | mT   | additional reversible angle error and additional angle error life time drift |

## 5.3 Thermal resistance

The [Table 10](#) describes the thermal resistance of the package.

Table 10 Thermal resistance of DSO-8

| Parameter                | Symbol            | Values |      |      | Unit | Note or Test Condition        |
|--------------------------|-------------------|--------|------|------|------|-------------------------------|
|                          |                   | Min.   | Typ. | Max. |      |                               |
| Thermal resistance DSO-8 | $R_{\text{thJA}}$ | –      | 300  | 350  | K/W  | Junction to air <sup>1)</sup> |

1) According to Jedec JESD51-7

## 6 Functional behavior

### 6.1 Functional description

The measurement principle of the sensor is based on the TMR (tunneling magneto-resistance) effect.

The sensor measures the angular orientation of the magnetic field vector parallel to the package surface.

The sensor provides a differential sine and a differential cosine analog output signal for external angle calculation.

The provided output signal is ratiometric to the supply voltage.

The sensor has a measurement range of 360°.

### 6.2 Safety functions

The TLE5501 has no internal safety mechanisms implemented. All diagnostics to verify correct sensor functionality must be implemented externally in the micro controller.

### 6.3 Failure reactions

As the TLE5501 has no implemented safety mechanisms, potential chip errors will not be indicated by the sensor. They can be detected, however, by proper external mechanisms.

The sensor can withstand a short of any pin to ground without any damage of the sensor.

The sensor can withstand a short of any pin to sensor supply voltage without any damage of the sensor.

The sensor can also withstand a short of a pin to a neighbor pin without any damage.

### 6.4 Electrical parameters

The indicated parameters apply to the full operating range, unless otherwise specified. The typical values correspond to a supply voltage  $V_{DD} = 5.0\text{ V}$  and  $T_A = 25^\circ\text{C}$ , unless individually specified.


**Table 11** Electrical parameters

| Parameter                                             | Symbol                | Values |      |      | Unit | Note or Test Condition                    |
|-------------------------------------------------------|-----------------------|--------|------|------|------|-------------------------------------------|
|                                                       |                       | Min.   | Typ. | Max. |      |                                           |
| Bridge resistance                                     | $R_{\text{bridge}}$   | 4000   | 6000 | 8000 | Ohm  | for $T_A = 25^\circ\text{C}$              |
| Temperature coefficient of bridge resistance          | $TC_{\text{bridge}}$  | -0.124 | -0.1 | 0    | %/K  | reference temperature: $25^\circ\text{C}$ |
| Differential output voltage amplitude                 | $A_{\text{out,diff}}$ | 270    | 320  | 370  | mV/V | peak-value, for $T_A = 25^\circ\text{C}$  |
| Single ended output voltage amplitude                 | $A_{\text{out,se}}$   | 135    | 160  | 185  | mV/V | peak-value, for $T_A = 25^\circ\text{C}$  |
| Orthogonality error (single and differential ended)   | $\phi$                | -10    | 0    | 10   | °    |                                           |
| Amplitude synchronism (single and differential ended) | $k$                   | 90     | 100  | 110  | %    | for $T_A = 25^\circ\text{C}$              |
| Differential offset voltage                           | $V_{\text{off,diff}}$ | -5     | 0    | 5    | mV/V | for $T_A = 25^\circ\text{C}$              |

## Functional behavior

**Table 11** Electrical parameters (cont'd)

| Parameter                                                                   | Symbol              | Values |       |      | Unit              | Note or Test Condition                                                                                                             |
|-----------------------------------------------------------------------------|---------------------|--------|-------|------|-------------------|------------------------------------------------------------------------------------------------------------------------------------|
|                                                                             |                     | Min.   | Typ.  | Max. |                   |                                                                                                                                    |
| Single ended offset voltage                                                 | $V_{\text{off,se}}$ | -5     | 0     | 5    | mV/V              | referring to $V_{\text{DD}}/2$ ,<br>for $T_A = 25^\circ\text{C}$                                                                   |
| Temperature coefficient of output amplitude (single and differential ended) | $TC_{\text{Amp}}$   | -0.145 | -0.12 | 0    | %/K               | reference temperature:<br>$T_A = 25^\circ\text{C}$                                                                                 |
| Temperature coefficient of offset voltage (single and differential ended)   | $TC_{\text{Voff}}$  | -5     | 0     | 5    | $\mu\text{V/V/K}$ |                                                                                                                                    |
| Supply current                                                              | $I_S$               | –      | 1.67  | 2.5  | mA                | @ $V_{\text{DD}} = 5\text{ V}$ / $T_A = 25^\circ\text{C}$ (supply current is calculated from supply voltage and bridge resistance) |
| Power on delay time                                                         | $t_{\text{delay}}$  | –      | –     | 1    | ms                | for a load capacity of $C_L < 30\text{ nF}$                                                                                        |
|                                                                             |                     | –      | –     | 4    | $\mu\text{s}$     | for a load capacity of $C_L < 100\text{ pF}$                                                                                       |

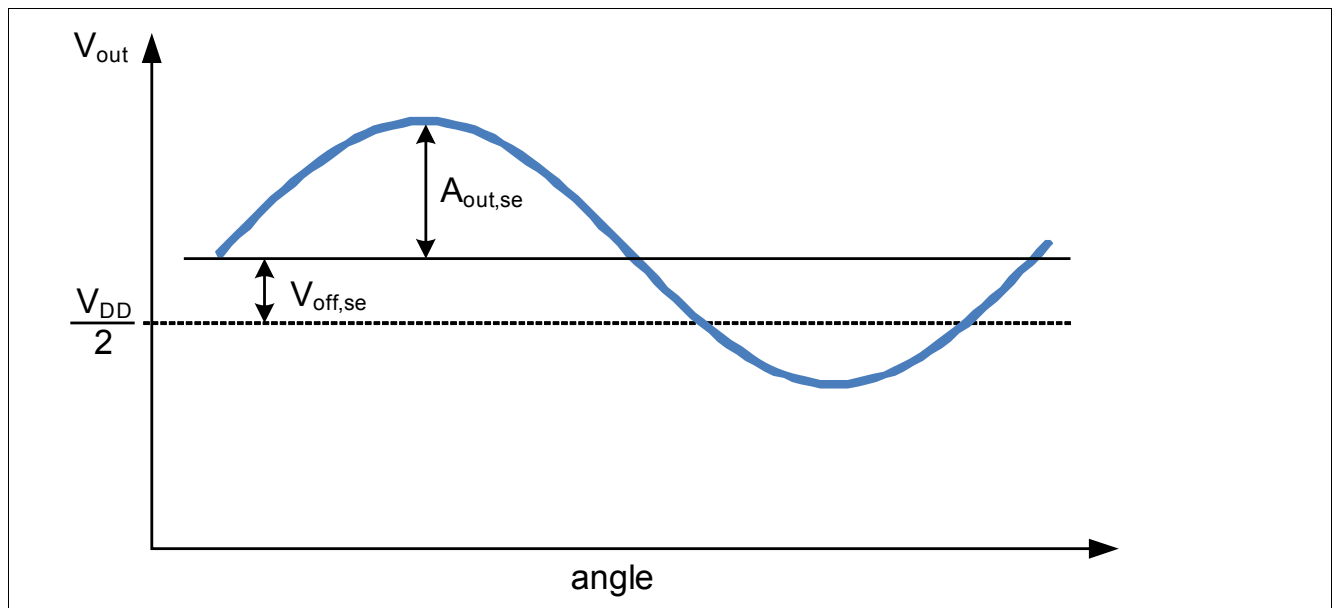

**Figure 8** Definition of single ended offset  $V_{\text{off,se}}$  and single ended amplitude  $A_{\text{out,se}}$

The sensor has a remaining angle error as shown in [Table 12](#) for differential usage and in [Table 13](#) for single ended. The error value refers to  $B_z = 0\text{ mT}$ . The overall angle error represents the relative angle error. This error describes the deviation from the reference line after zero-angle definition. The reference line is defined in a way that the angle error is symmetric to this line. It is valid for a static magnetic field.

## Functional behavior

**Table 12** specifies the angle error in the magnetic field range of  $25 \text{ mT} < B < 80 \text{ mT}$  with maximum ambient temperature  $T_A = 125^\circ\text{C}$  and  $T_A = 150^\circ\text{C}$ , respectively. Differential output signal is used. For magnetic field values  $B$  in the range of  $20 \text{ mT} < B < 25 \text{ mT}$  or  $80 \text{ mT} < B < 100 \text{ mT}$ , a corresponding adder has to be applied to the specified angle accuracy as given in the footnote.

**Table 12** Angle error for  $T_A < 125^\circ\text{C}$  and  $T_A < 150^\circ\text{C}$  (differential)

| Parameter                                                                                 | Symbol               | Values |      |      | Unit | Note or Test Condition                                                                                                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------|----------------------|--------|------|------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                           |                      | Min.   | Typ. | Max. |      |                                                                                                                                                                                                                                                                          |
| Difference between output angle and real angle <sup>1)</sup><br>differential signals used | $A_{\text{Err,RT}}$  | –      | –    | 0.8  | °    | at 0 h/25°C, $B = 25 \text{ mT}$ to $80 \text{ mT}$ <sup>2)</sup><br>(with compensation of offset, orthogonality and amplitude at 0h/25°C)                                                                                                                               |
| Difference between output angle and real angle <sup>1)</sup><br>differential signals used | $A_{\text{Err,0}}$   | –      | –    | 1.0  | °    | at 0 h/over temperature<br>$T_A = -40^\circ\text{C}$ to $150^\circ\text{C}$ ,<br>$B = 25 \text{ mT}$ to $80 \text{ mT}$ <sup>2)</sup><br>(with compensation of offset, orthogonality and amplitude at 0h/25°C)                                                           |
| Difference between output angle and real angle <sup>1)</sup><br>differential signals used | $A_{\text{Err,125}}$ | –      | –    | 1.2  | °    | over lifetime & temperature<br>$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$ ,<br>$B = 25 \text{ mT}$ to $80 \text{ mT}$ <sup>2)</sup><br>(with compensation of offset, orthogonality and amplitude at 0h/25°C)<br>lifetime stress according to Grade 1 qualification |
| Difference between output angle and real angle <sup>1)</sup><br>differential signals used | $A_{\text{Err,150}}$ | –      | –    | 1.5  | °    | over lifetime & temperature<br>$T_A = -40^\circ\text{C}$ to $150^\circ\text{C}$ ,<br>$B = 25 \text{ mT}$ to $80 \text{ mT}$ <sup>2)</sup><br>(with compensation of offset, orthogonality and amplitude at 0h/25°C)<br>lifetime stress according to Grade 0 qualification |
| Angle error due to hysteresis <sup>3)</sup>                                               | $A_{\text{Hyst}}$    | –      | –    | 0.4  | °    | $20 \text{ mT} < B < 100 \text{ mT}$                                                                                                                                                                                                                                     |

- 1) Hysteresis and noise are included in the angle accuracy specification
- 2) For magnetic fields in the range of  $20 \text{ mT} < B < 25 \text{ mT}$  or  $80 \text{ mT} < B < 100 \text{ mT}$  an adder of  $0.2^\circ$  to the angle error has to be applied
- 3) Hysteresis is the largest measurement angle difference between left rotation and right rotation. The raw signals are corrected with the mean correction parameters of both rotation directions

## Functional behavior

**Table 13** specifies the angle error in the magnetic field range of  $25 \text{ mT} < B < 80 \text{ mT}$  with maximum ambient temperature  $T_A = 125^\circ\text{C}$  and  $T_A = 150^\circ\text{C}$ , respectively. Single ended output signal is used. For magnetic field values  $B$  in the range of  $20 \text{ mT} < B < 25 \text{ mT}$  or  $80 \text{ mT} < B < 100 \text{ mT}$ , a corresponding adder has to be applied to the specified angle accuracy as given in the footnote.

**Table 13** Angle error for  $T_A < 125^\circ\text{C}$  and  $T_A < 150^\circ\text{C}$  (single-ended)

| Parameter                                                                                 | Symbol               | Values |      |      | Unit | Note or Test Condition                                                                                                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------|----------------------|--------|------|------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                           |                      | Min.   | Typ. | Max. |      |                                                                                                                                                                                                                                                                          |
| Difference between output angle and real angle <sup>1)</sup><br>single-ended signals used | $A_{\text{Err,RT}}$  | –      | –    | 0.9  | °    | at 0 h/25°C, $B = 25 \text{ mT}$ to $80 \text{ mT}$ <sup>2)</sup><br>(with compensation of offset, orthogonality and amplitude at 0h/25°C)                                                                                                                               |
| Difference between output angle and real angle <sup>1)</sup><br>single-ended signals used | $A_{\text{Err,0}}$   | –      | –    | 1.1  | °    | at 0 h/over temperature<br>$T_A = -40^\circ\text{C}$ to $150^\circ\text{C}$ ,<br>$B = 25 \text{ mT}$ to $80 \text{ mT}$ <sup>2)</sup><br>(with compensation of offset, orthogonality and amplitude at 0h/25°C)                                                           |
| Difference between output angle and real angle <sup>1)</sup><br>single-ended signals used | $A_{\text{Err,125}}$ | –      | –    | 1.3  | °    | over lifetime & temperature<br>$T_A = -40^\circ\text{C}$ to $125^\circ\text{C}$ ,<br>$B = 25 \text{ mT}$ to $80 \text{ mT}$ <sup>2)</sup><br>(with compensation of offset, orthogonality and amplitude at 0h/25°C)<br>lifetime stress according to Grade 1 qualification |
| Difference between output angle and real angle <sup>1)</sup><br>single-ended signals used | $A_{\text{Err,150}}$ | –      | –    | 1.6  | °    | over lifetime & temperature<br>$T_A = -40^\circ\text{C}$ to $150^\circ\text{C}$ ,<br>$B = 25 \text{ mT}$ to $80 \text{ mT}$ <sup>2)</sup><br>(with compensation of offset, orthogonality and amplitude at 0h/25°C)<br>lifetime stress according to Grade 0 qualification |
| Angle error due to hysteresis <sup>3)</sup>                                               | $A_{\text{Hyst}}$    | –      | –    | 0.4  | °    | $20 \text{ mT} < B < 100 \text{ mT}$                                                                                                                                                                                                                                     |


- 1) Hysteresis and noise are included in the angle accuracy specification
- 2) For magnetic fields in the range of  $20 \text{ mT} < B < 25 \text{ mT}$  or  $80 \text{ mT} < B < 100 \text{ mT}$  an adder of  $0.2^\circ$  to the angle error has to be applied
- 3) Hysteresis is the largest measurement angle difference between left rotation and right rotation. The raw signals are corrected with the mean correction parameters of both rotation directions

## 7 Typical performance


### 7.1 Angle error

**Figure 9** shows the typical angle error of the TLE5501 for different ambient temperatures  $T_A$  and magnetic fields  $B$  for a one-time compensation of offset, amplitude and non-orthogonality at 25°C and  $B = 40$  mT.

**Figure 10** shows the typical angle error in case offset, amplitude and non-orthogonality is compensated for each temperature  $T$  and magnetic field  $B$ .

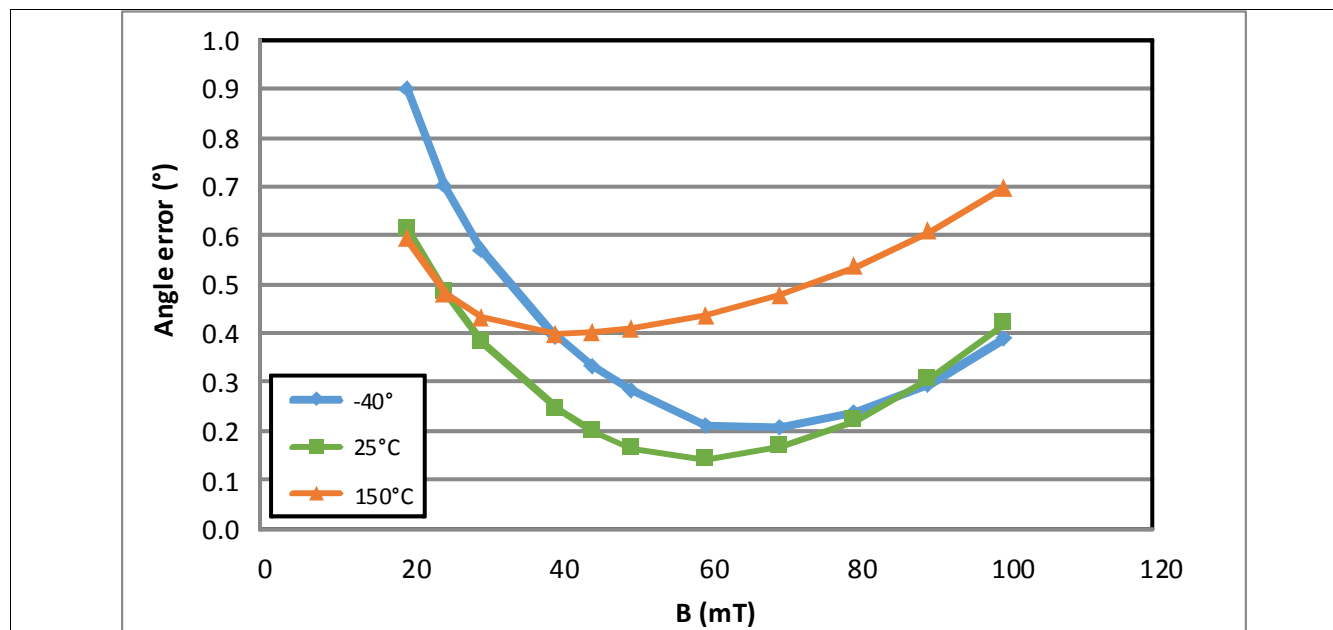

**Figure 9** Typical angle error at 0h, differential signals, one-time compensation of offset, amplitude and orthogonality error at 25°C and 40 mT

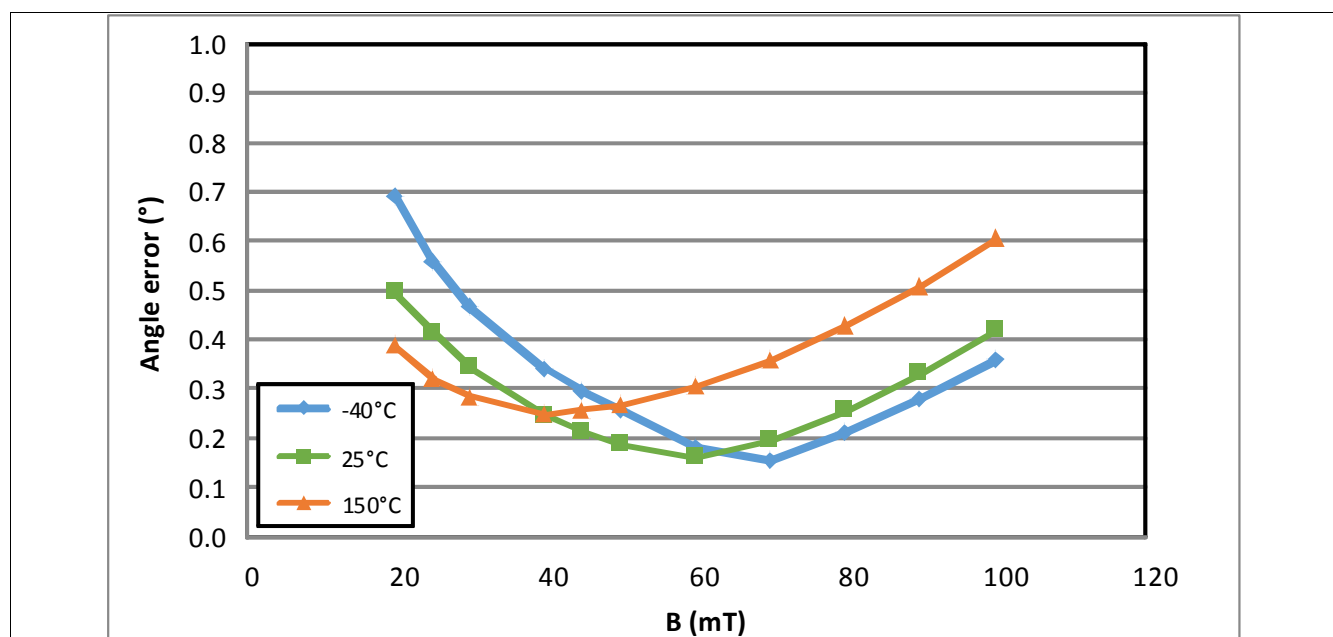

**Figure 10** Typical angle error at 0h, differential signals, ideal compensation of offset, amplitude and orthogonality error at each temperature  $T$  and magnetic field  $B$

Typical performance

## 7.2 Hysteresis

Figure 11 shows the typical hysteresis of the TLE5501.

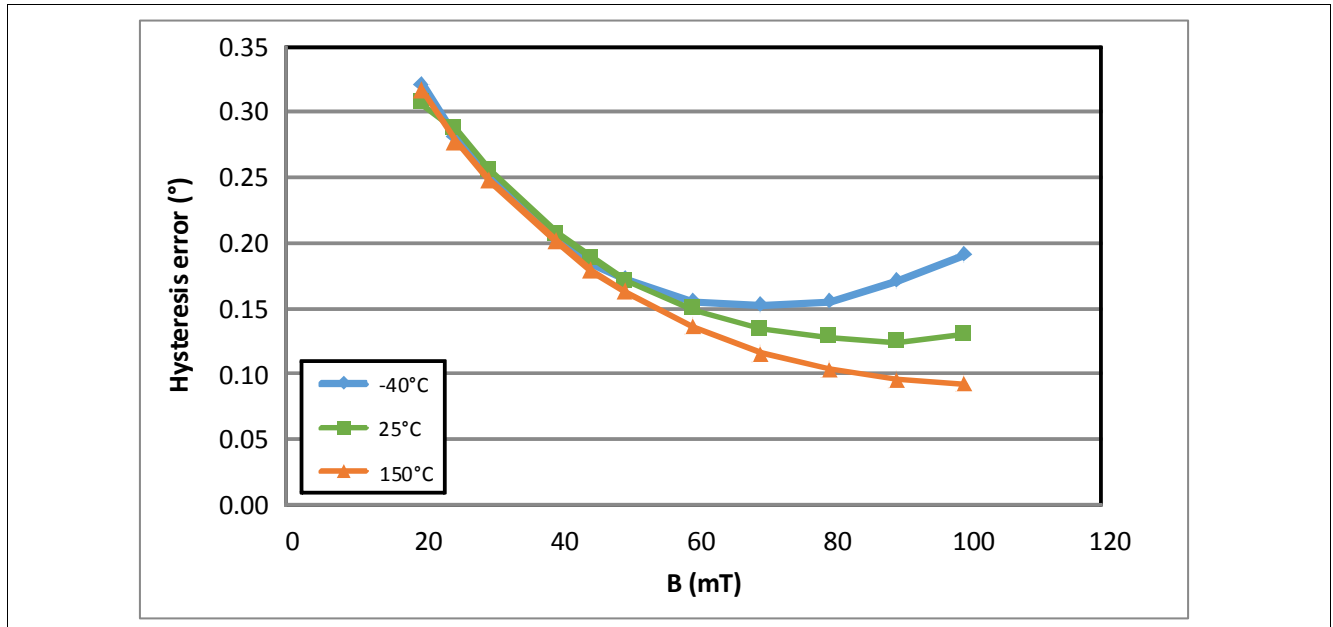


Figure 11 Typical hysteresis



## Package

## 8 Package

### 8.1 Package info

The package is qualified with a MSL level of 3. It is halogen free, lead free and RoHS compliant.

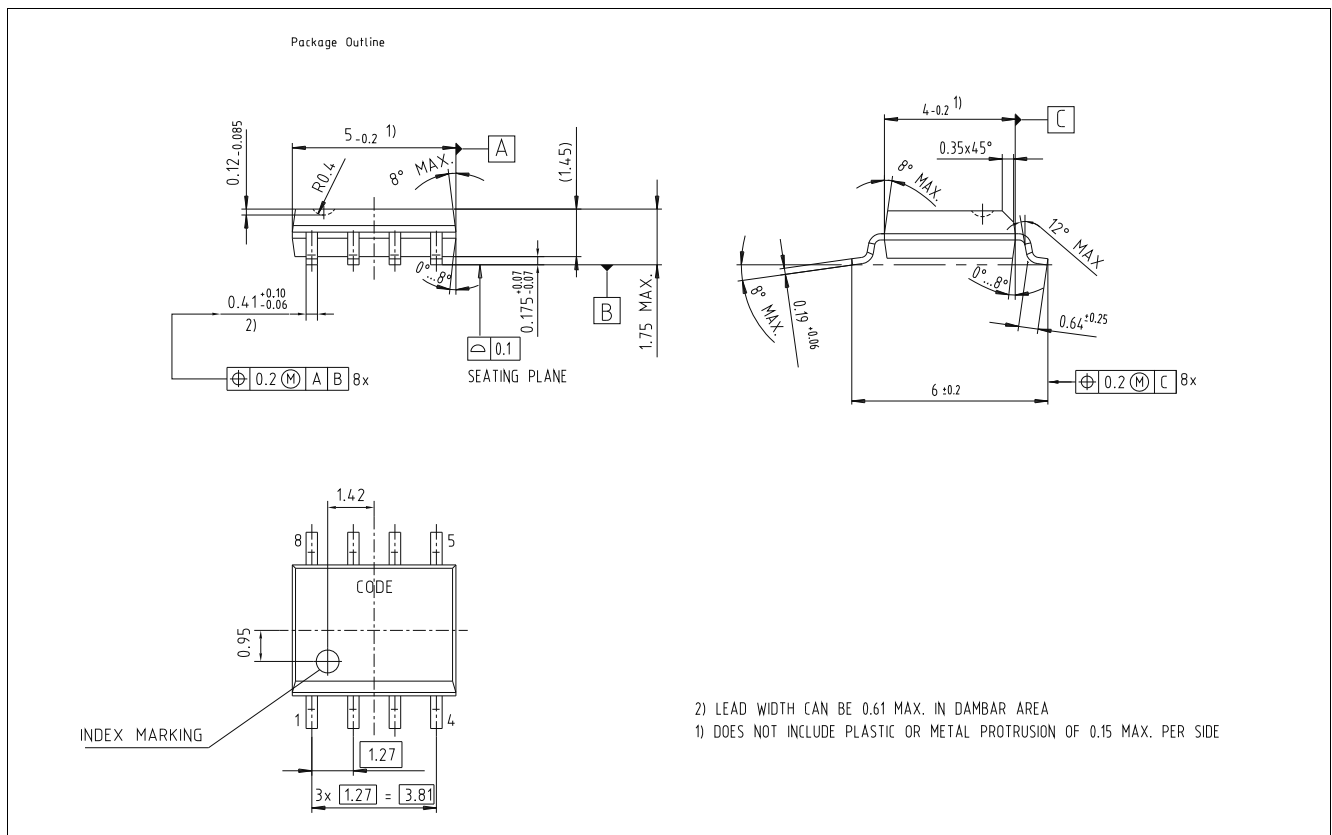


Figure 12 Package outline

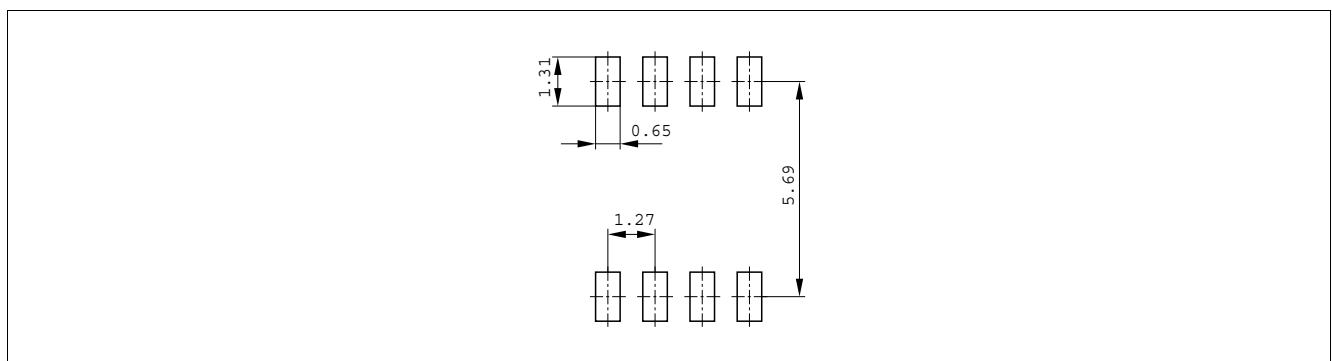


Figure 13 Footprint

## Package

### 8.2 Package marking


The marking on the front side of the package identifies the type of the sensor, the manufacturing lot information and the manufacturing date code.

**Table 14** Marking

| Position | Marking           | Description                                  |
|----------|-------------------|----------------------------------------------|
| 1st Line | 5010001 / 5010002 | See ordering code in <a href="#">Table 1</a> |
| 2nd Line | xxx               | Lot code                                     |
| 3rd Line | Gxxxx             | G: green, 4-digit: date code                 |

### 8.3 Packing

The packing of the device is in tape & reel.

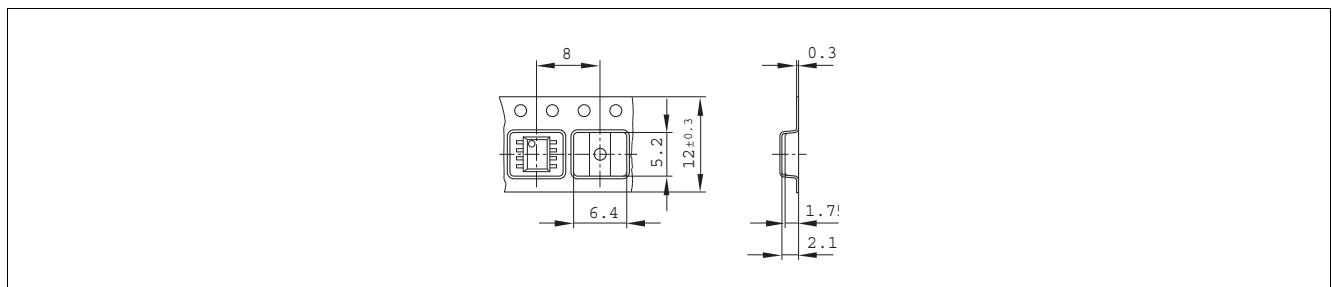


**Figure 14** Packing

### 8.4 Die Position inside package

The position of the sensitive element inside the package is specified in [Figure 15](#).

The size of the sensitive TMR area is 315 μm x 315 μm with the center being in the center of the package.

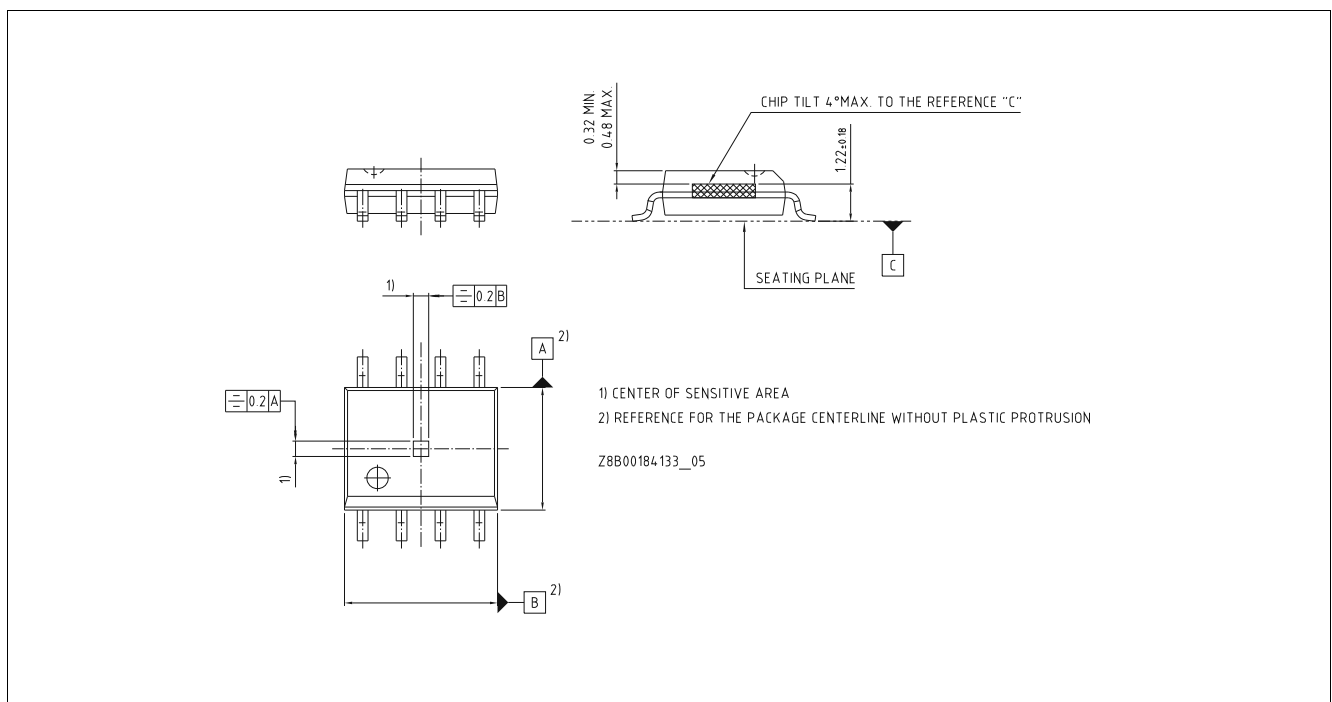

**Figure 15** Die in package

---

Revision history

## 9 Revision history

| Revision | Date       | Changes          |
|----------|------------|------------------|
| 1.0      | 2018-07-24 | Initial creation |

## Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2018-07-24**  
**Published by**  
**Infineon Technologies AG**  
**81726 Munich, Germany**

**© 2018 Infineon Technologies AG.**  
**All Rights Reserved.**

**Do you have a question about any aspect of this document?**  
**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

## Document reference

### IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.