



HESTORE.HU
elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

IR2010(S)(TR) & (PbF)

Features

- Floating channel designed for bootstrap operation
- Fully operational to 200V
- Tolerant to negative transient voltage, dV/dt immune
- Gate drive supply range from 10 to 20V
- Undervoltage lockout for both channels
- 3.3V logic compatible
- Separate logic supply range from 3.3V to 20V
- Logic and power ground $\pm 5V$ offset
- CMOS Schmitt-triggered inputs with pull-down
- Shut down input turns off both channels
- Matched propagation delay for both channels
- Outputs in phase with inputs
- Also available LEAD-FREE

HIGH AND LOW SIDE DRIVER

Product Summary

V _{OFFSET}	200V max.
I _O +/-	3.0A / 3.0A typ.
V _{OUT}	10 - 20V
t _{on/off}	95 & 65 ns typ.
Delay Matching	15 ns max.


Applications

- Audio Class D amplifiers
- High power DC-DC SMPS converters
- Other high frequency applications


Description

The IR2010 is a high power, high voltage, high speed power MOSFET and IGBT drivers with independent high and low side referenced output channels, ideal for Audio Class D and DC-DC converter applications. Logic inputs are compatible with standard CMOS or LSTTL output, down to 3.0V logic. The output drivers feature a high pulse current buffer stage designed for minimum driver cross-conduction. Propagation delays are matched to simplify use in high frequency applications. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high side configuration which operates up to 200 volts. Proprietary HVIC and latch immune CMOS technologies enable ruggedized monolithic construction.

Packages

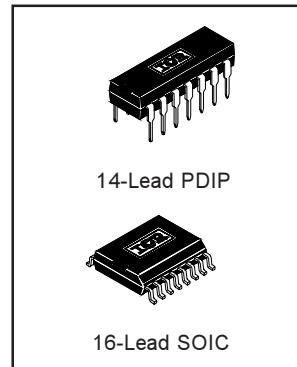

Typical Connection

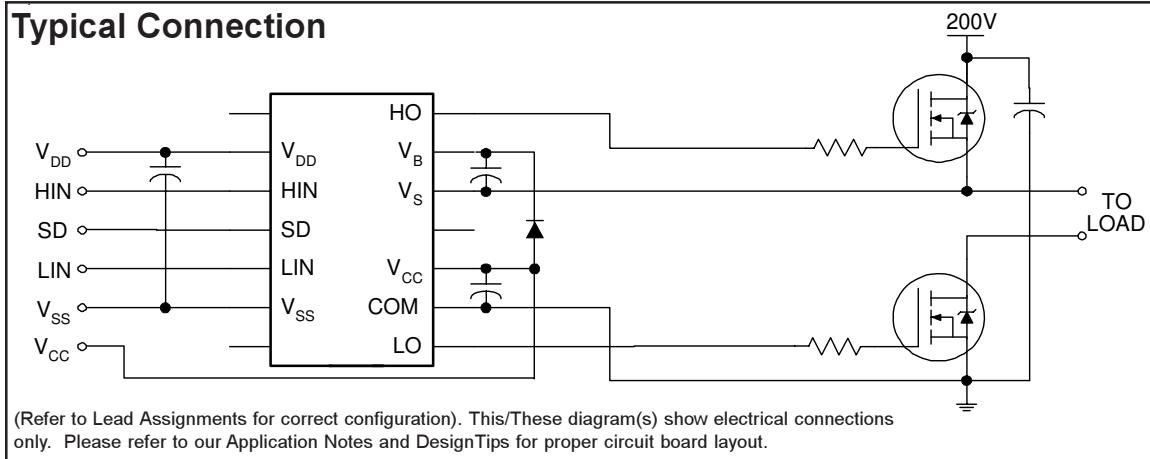

Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min.	Max.	Units
V_B	High side floating supply voltage	-0.3	225	V
V_S	High side floating supply offset voltage	$V_B - 25$	$V_B + 0.3$	
V_{HO}	High side floating output voltage	$V_S - 0.3$	$V_B + 0.3$	
V_{CC}	Low side fixed supply voltage	-0.3	25	
V_{LO}	Low side output voltage	-0.3	$V_{CC} + 0.3$	
V_{DD}	Logic supply voltage	-0.3	$V_{SS} + 25$	
V_{SS}	Logic supply offset voltage	$V_{CC} - 25$	$V_{CC} + 0.3$	
V_{IN}	Logic input voltage (HIN, LIN & SD)	$V_{SS} - 0.3$	$V_{DD} + 0.3$	
dV_S/dt	Allowable offset supply voltage transient (figure 2)	—	50	V/ns
P_D	Package power dissipation @ $T_A \leq +25^\circ\text{C}$	—	1.6	W
	(14 lead DIP) (16 lead SOIC)	—	1.25	
R_{THJA}	Thermal resistance, junction to ambient	—	75	°C/W
	(14 lead DIP) (16 lead SOIC)	—	100	
T_J	Junction temperature	—	150	°C
T_S	Storage temperature	-55	150	
T_L	Lead temperature (soldering, 10 seconds)	—	300	

Recommended Operating Conditions

The input/output logic timing diagram is shown in figure 1. For proper operation the device should be used within the recommended conditions. The V_S and V_{SS} offset ratings are tested with all supplies biased at 15V differential. Typical ratings at other bias conditions are shown in figures 24 and 25.

Symbol	Definition	Min.	Max.	Units
V_B	High side floating supply absolute voltage	$V_S + 10$	$V_S + 20$	V
V_S	High side floating supply offset voltage	Note 1	200	
V_{HO}	High side floating output voltage	V_S	V_B	
V_{CC}	Low side fixed supply voltage	10	20	
V_{LO}	Low side output voltage	0	V_{CC}	
V_{DD}	Logic supply voltage	$V_{SS} + 3$	$V_{SS} + 20$	
V_{SS}	Logic supply offset voltage	-5 (Note 2)	5	
V_{IN}	Logic input voltage (HIN, LIN & SD)	V_{SS}	V_{DD}	
T_A	Ambient temperature	-40	125	°C

Note 1: Logic operational for V_S of -4 to +200V. Logic state held for V_S of -4V to $-V_{BS}$.

Note 2: When $V_{DD} < 5\text{V}$, the minimum V_{SS} offset is limited to $-V_{DD}$.

(Please refer to the Design Tip DT97-3 for more details).

Dynamic Electrical Characteristics

V_{BIAS} (V_{CC} , V_{BS} , V_{DD}) = 15V, C_L = 1000 pF, T_A = 25°C and V_{SS} = COM unless otherwise specified. The dynamic electrical characteristics are measured using the test circuit shown in Figure 3.

Symbol	Definition	Figure	Min.	Typ.	Max.	Units	Test Conditions
t_{on}	Turn-on propagation delay	7	50	95	135	ns	V_S = 0V
t_{off}	Turn-off propagation delay	8	30	65	105		V_S = 200V
t_{sd}	Shutdown propagation delay	9	35	70	105		V_S = 200V
t_r	Turn-on rise time	10	—	10	20		
t_f	Turn-off fall time	11	—	15	25		
MT	Delay matching, HS & LS turn-on/off	6	—	—	15		

Static Electrical Characteristics


V_{BIAS} (V_{CC} , V_{BS} , V_{DD}) = 15V, T_A = 25°C and V_{SS} = COM unless otherwise specified. The V_{IN} , V_{TH} and I_{IN} parameters are referenced to V_{SS} and are applicable to all three logic input leads: HIN, LIN and SD. The V_O and I_O parameters are referenced to COM and are applicable to the respective output leads: HO or LO.

Symbol	Definition	Figure	Min.	Typ.	Max.	Units	Test Conditions
V_{IH}	Logic "1" input voltage	12	9.5	—	—	V	V_{DD} = 15V
V_{IL}	Logic "0" input voltage	13	—	—	6.0		V_{DD} = 3.3V
V_{IH}	Logic "1" input voltage	12	2	—	—		I_O = 0A
V_{IL}	Logic "0" input voltage	13	—	—	1		I_O = 0A
V_{OH}	High level output voltage, $V_{BIAS} - V_O$	14	—	—	1.0		$V_B = V_S$ = 200V
V_{OL}	Low level output voltage, V_O	15	—	—	0.1		$V_{IN} = 0V$ or V_{DD}
I_{LK}	Offset supply leakage current	16	—	—	50	μA	$V_{IN} = 0V$ or V_{DD}
I_{QBS}	Quiescent V_{BS} supply current	17	—	70	210		$V_{IN} = 0V$ or V_{DD}
I_{QCC}	Quiescent V_{CC} supply current	18	—	100	230		$V_{IN} = 0V$ or V_{DD}
I_{QDD}	Quiescent V_{DD} supply current	19	—	1	5		$V_{IN} = 0V$ or V_{DD}
I_{IN+}	Logic "1" input bias current	20	—	20	40		$V_{IN} = V_{DD}$
I_{IN-}	Logic "0" input bias current	21	—	—	1.0		$V_{IN} = 0V$
V_{BSUV+}	V_{BS} supply undervoltage positive going threshold	22	7.5	8.6	9.7	V	
V_{BSUV-}	V_{BS} supply undervoltage negative going threshold	23	7.0	8.2	9.4		
V_{CCUV+}	V_{CC} supply undervoltage positive going threshold	24	7.5	8.6	9.7		
V_{CCUV-}	V_{CC} supply undervoltage negative going threshold	25	7.0	8.2	9.4		
I_{O+}	Output high short circuit pulsed current	26	2.5	3.0	—	A	$V_O = 0V$, $V_{IN} = V_{DD}$ PW $\leq 10 \mu s$
I_{O-}	Output low short circuit pulsed current	27	2.5	3.0	—		$V_O = 15V$, $V_{IN} = 0V$ PW $\leq 10 \mu s$

IR2010(S)(TR) & (PbF)

Functional Block Diagram

International
IR Rectifier

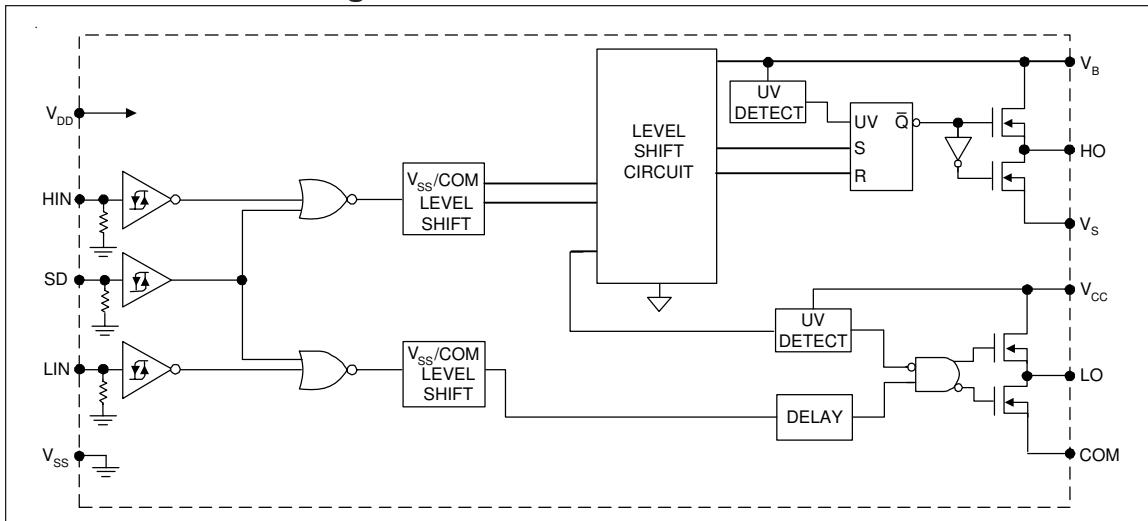

Lead Definitions

Symbol	Description
V _{DD}	Logic supply
HIN	Logic input for high side gate driver output (HO), in phase
SD	Logic input for shutdown
LIN	Logic input for low side gate driver output (LO), in phase
V _{SS}	Logic ground
V _B	High side floating supply
HO	High side gate drive output
V _S	High side floating supply return
V _{CC}	Low side supply
LO	Low side gate drive output
COM	Low side return

Lead Assignments

<table border="1"> <tr><td>8</td><td>HO</td><td>7</td></tr> <tr><td>9</td><td>VDD</td><td>VB</td></tr> <tr><td>10</td><td>HIN</td><td>V_S</td></tr> <tr><td>11</td><td>SD</td><td>4</td></tr> <tr><td>12</td><td>LIN</td><td>V_{CC}</td></tr> <tr><td>13</td><td>V_{SS}</td><td>2</td></tr> <tr><td>14</td><td>LO</td><td>1</td></tr> </table> <p>14 Lead PDIP</p>	8	HO	7	9	VDD	VB	10	HIN	V _S	11	SD	4	12	LIN	V _{CC}	13	V _{SS}	2	14	LO	1	<table border="1"> <tr><td>9</td><td>HO</td><td>8</td></tr> <tr><td>10</td><td>VDD</td><td>VB</td></tr> <tr><td>11</td><td>HIN</td><td>V_S</td></tr> <tr><td>12</td><td>SD</td><td>6</td></tr> <tr><td>13</td><td>LIN</td><td>V_{CC}</td></tr> <tr><td>14</td><td>V_{SS}</td><td>3</td></tr> <tr><td>15</td><td>COM</td><td>2</td></tr> <tr><td>16</td><td>LO</td><td>1</td></tr> </table> <p>16 Lead SOIC (Wide Body)</p>	9	HO	8	10	VDD	VB	11	HIN	V _S	12	SD	6	13	LIN	V _{CC}	14	V _{SS}	3	15	COM	2	16	LO	1
8	HO	7																																												
9	VDD	VB																																												
10	HIN	V _S																																												
11	SD	4																																												
12	LIN	V _{CC}																																												
13	V _{SS}	2																																												
14	LO	1																																												
9	HO	8																																												
10	VDD	VB																																												
11	HIN	V _S																																												
12	SD	6																																												
13	LIN	V _{CC}																																												
14	V _{SS}	3																																												
15	COM	2																																												
16	LO	1																																												
IR2010	IR2010S																																													
Part Number																																														

IR2010(S)(TR) & (PbF)

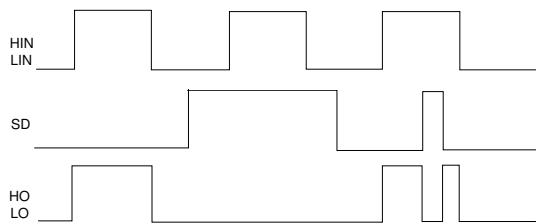


Figure 1. Input/Output Timing Diagram

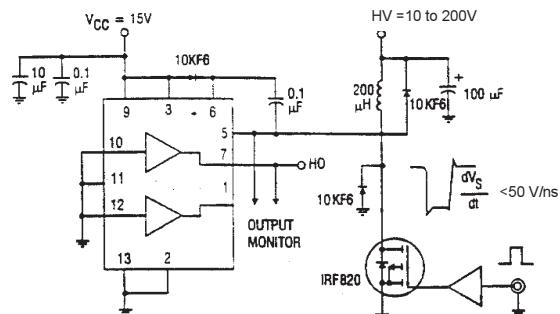


Figure 2. Floating Supply Voltage Transient Test Circuit

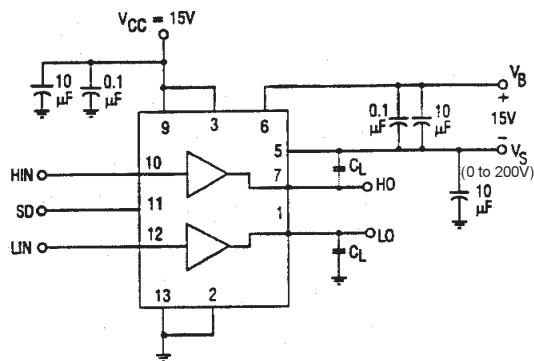


Figure 3. Switching Time Test Circuit

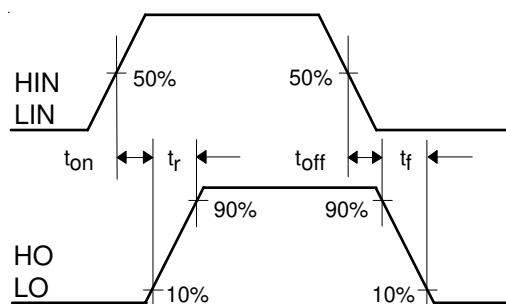


Figure 4. Switching Time Waveform Definition




Figure 5. Shutdown Waveform Definitions

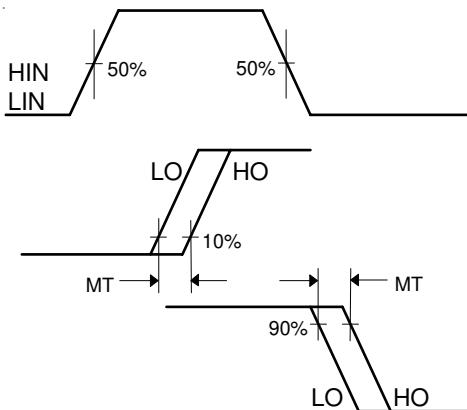


Figure 6. Delay Matching Waveform Definitions

IR2010(S)(TR) & (PbF)

International
IR Rectifier

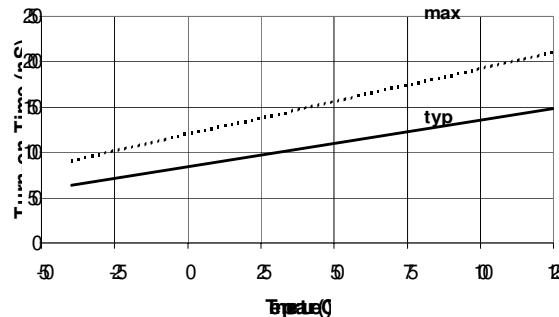


Figure 7A. Turn-on Time vs. Temperature

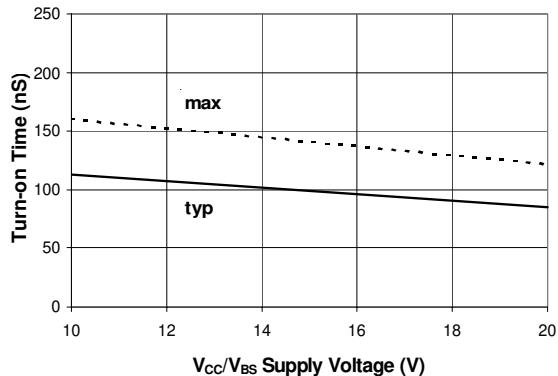


Figure 7B. Turn-on Time vs. V_{CC}/V_{BS} Voltage

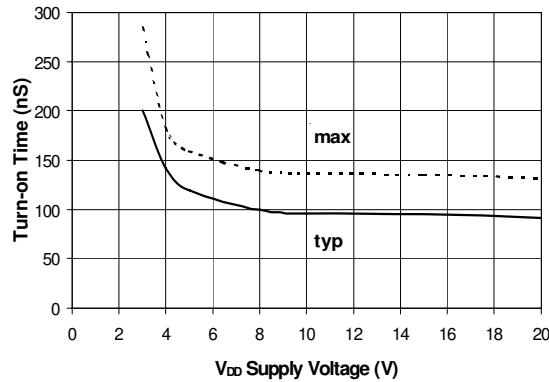


Figure 7C. Turn-on Time vs V_{DD} Voltage

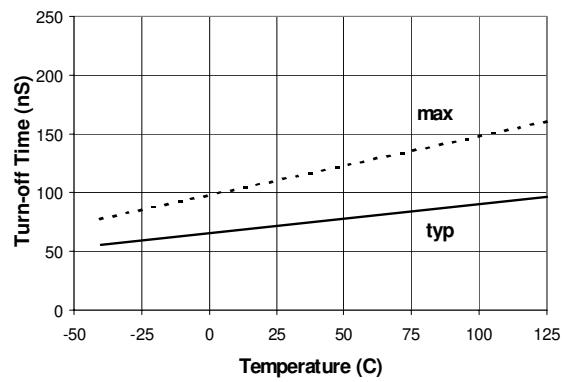


Figure 8A. Turn-off Time vs. Temperature

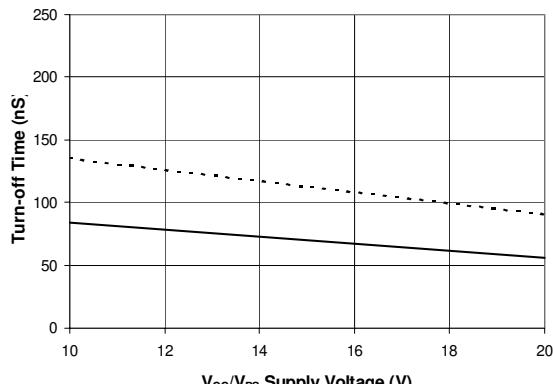


Figure 8B. Turn-off Time vs. V_{CC}/V_{BS} Voltage

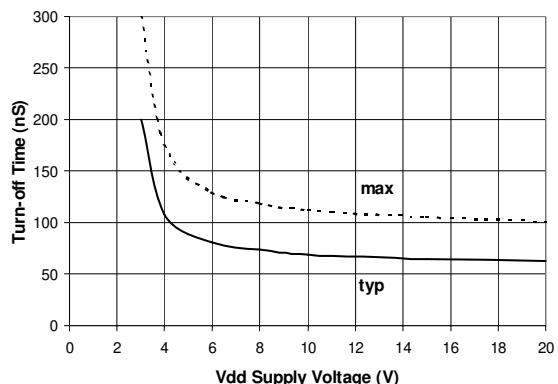


Figure 8C. Turn-off Time vs. V_{DD} Voltage

IR2010(S)(TR) & (PbF)

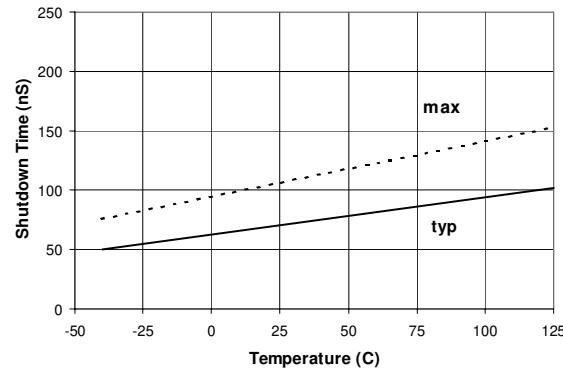


Figure 9A. Shutdown Time vs. Temperature

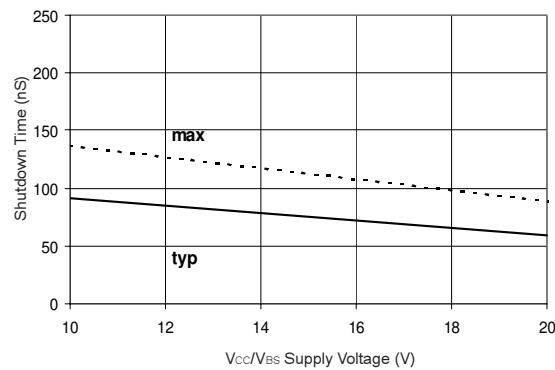


Figure 9B. Shutdown Time vs. Vcc/Vbs Voltage

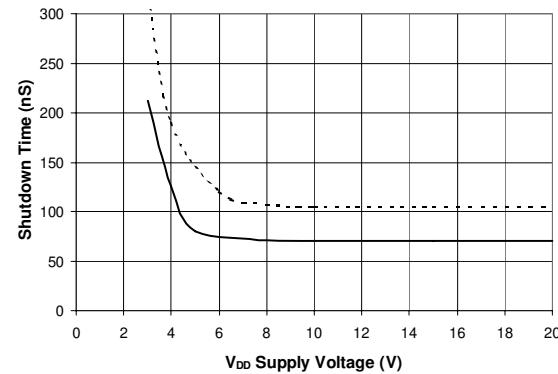


Figure 9C. Shutdown Time vs Vdd Voltage

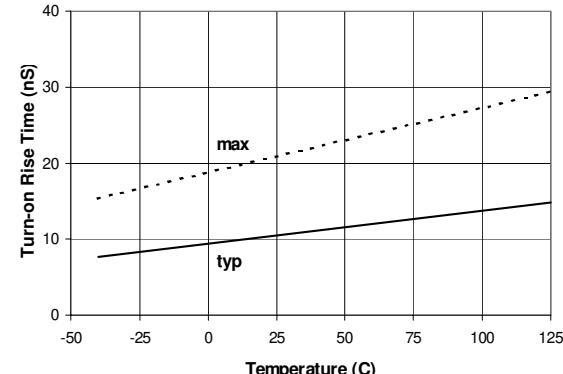


Figure 10A. Turn-on Rise Time vs. Temperature

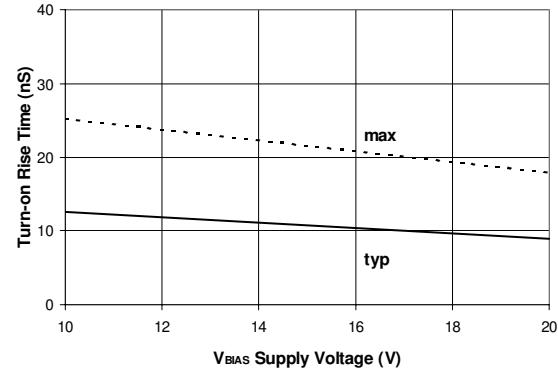


Figure 10B. Turn-on Rise Time vs. Vbias (Vcc=Vbs=Vdd) Voltage

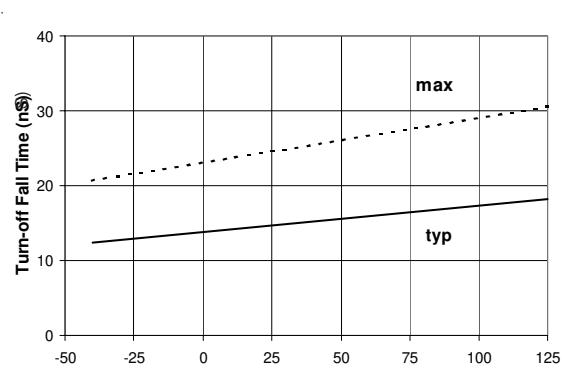


Figure 11A. Turn-off Fall Time vs. Temperature

IR2010(S)(TR) & (PbF)

International
IR Rectifier

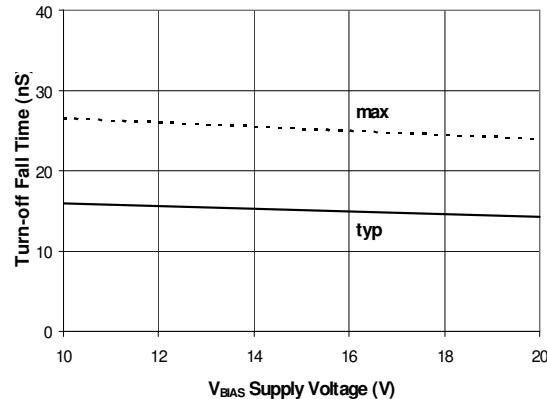


Figure 11B. Turn-Off Fall Time
vs. V_{BIA}S ($V_{CC} = V_{BS} = V_{DD}$) Voltage

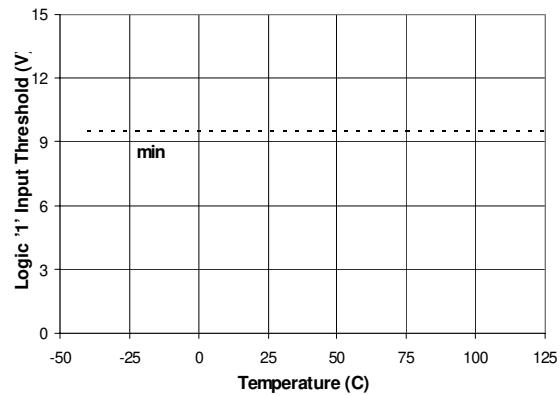


Figure 12A. Logic "1" Input Threshold vs. Temperature

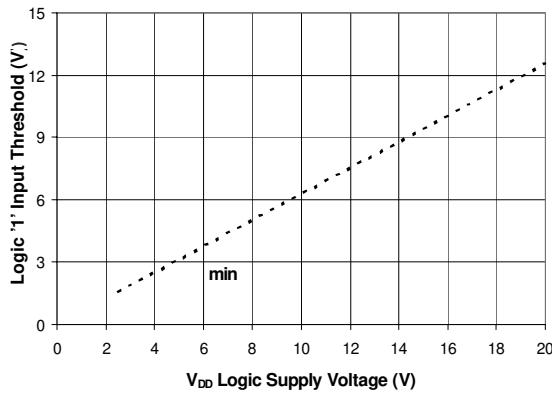


Figure 12B. Logic "1" Input Threshold vs. V_{DD} Voltage

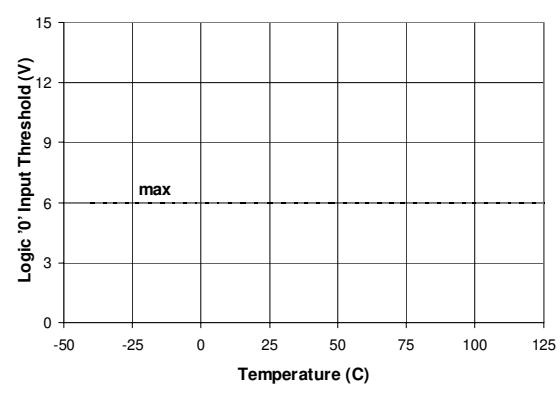


Figure 13A. Logic "0" Input Threshold vs. Temperature

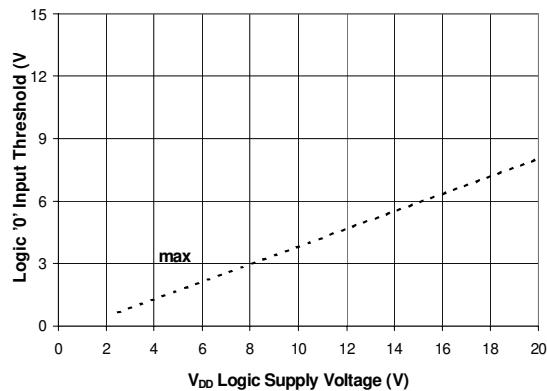


Figure 13B. Logic "0" Input Threshold vs. V_{DD} Voltage

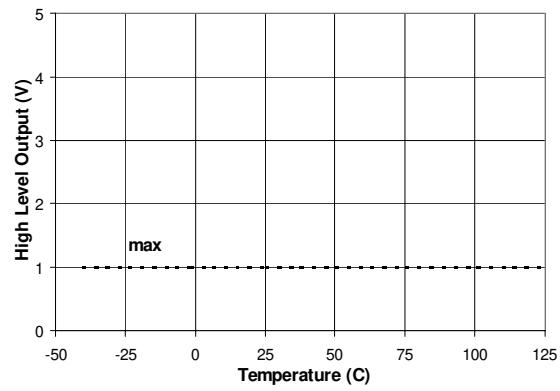


Figure 14A. High Level Output vs. Temperature

IR2010(S)(TR) & (PbF)

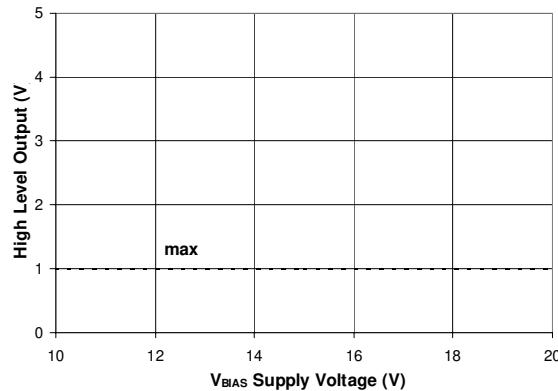


Figure 14B. High Level Output vs. V_{Bias} Voltage

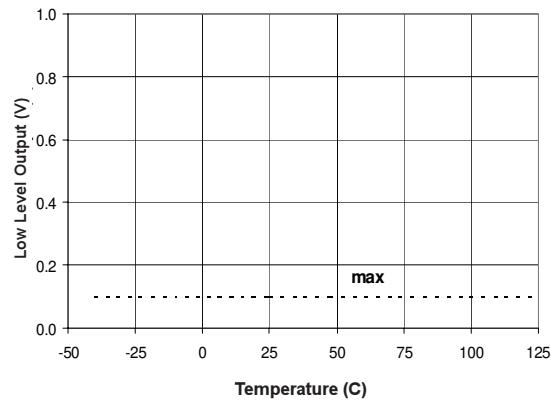


Figure 15A. Low Level Output vs. Temperature

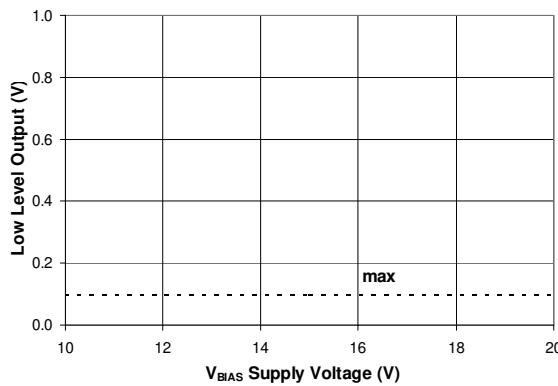


Figure 15B. Low Level Output vs. V_{Bias} Voltage

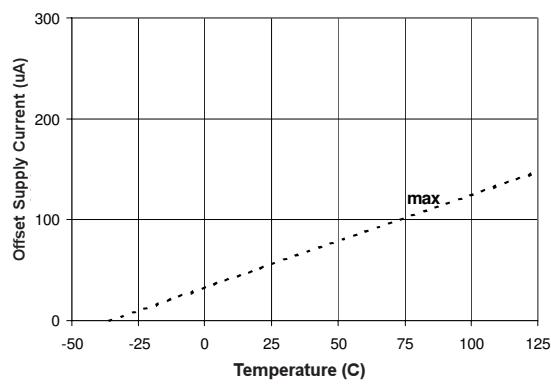


Figure 16A. Offset Supply Current vs. Temperature

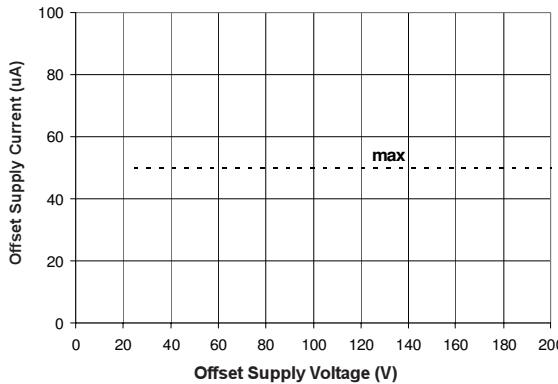


Figure 16B. Offset Supply Current vs. Offset Voltage

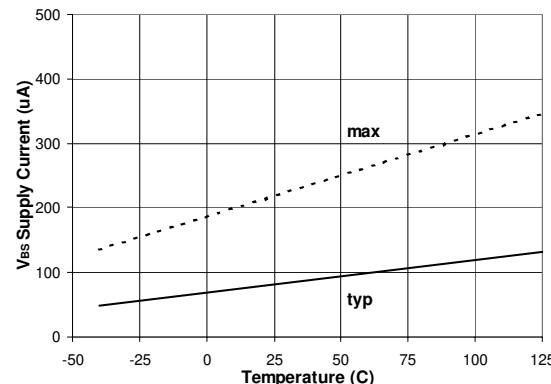


Figure 17A. V_{BS} Supply Current vs. Temperature

IR2010(S)(TR) & (PbF)

International
IR Rectifier

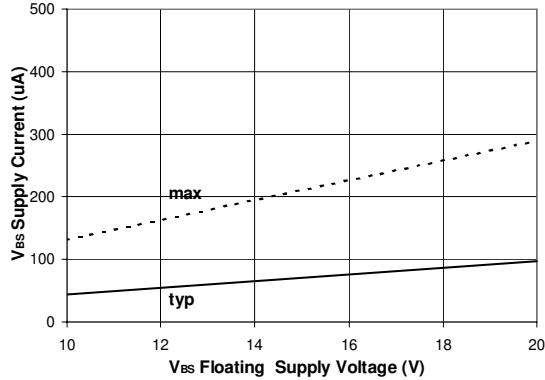


Figure 17B. V_{BS} Supply Current vs. V_{BS} Voltage

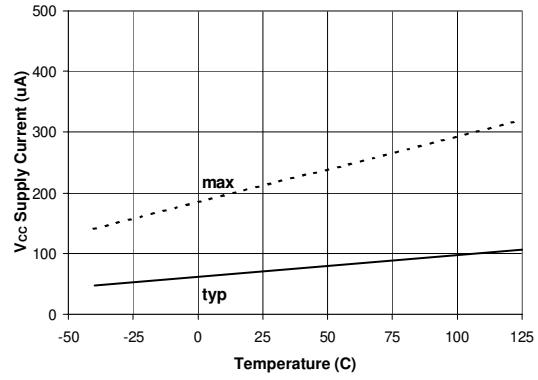


Figure 18A. V_{CC} Supply Current vs. Temperature

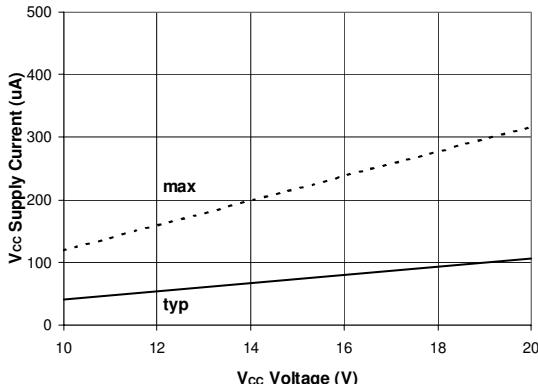


Figure 18B. V_{CC} Supply Current vs. V_{CC} Voltage

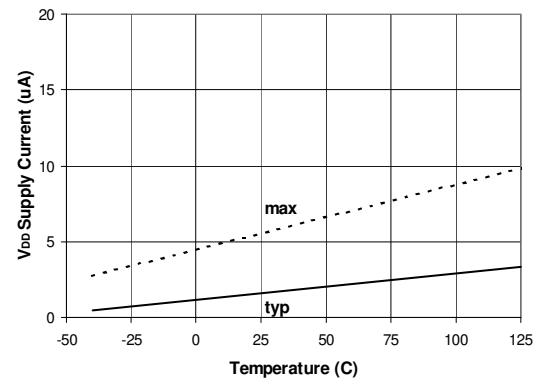


Figure 19A. V_{DD} Supply Current vs. Temperature

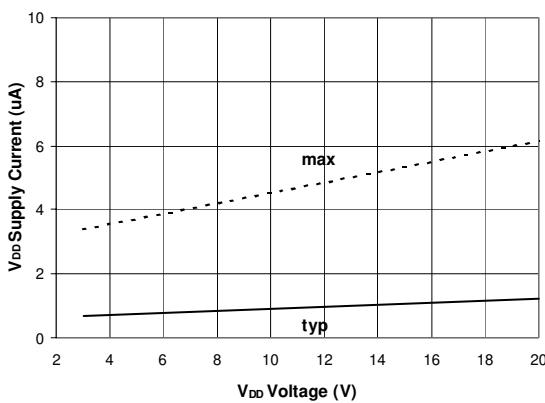


Figure 19B. V_{DD} Supply Current vs. V_{DD} Voltage

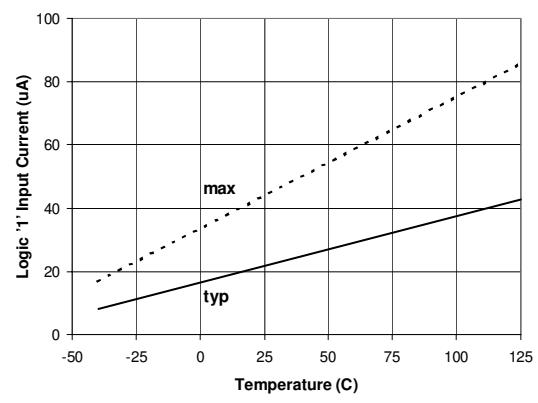


Figure 20A. Logic "1" Input Current vs. Temperature

IR2010(S)(TR) & (PbF)

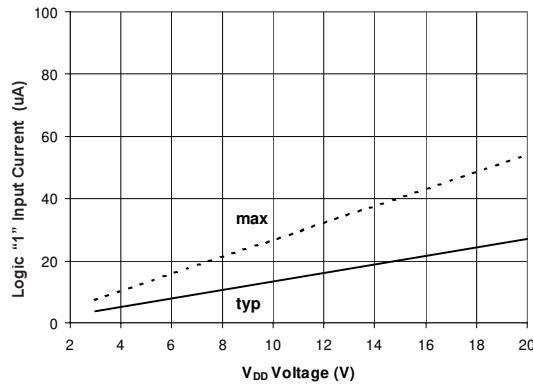


Figure 20B. Logic "1" Input Current vs. V_{DD} Voltage

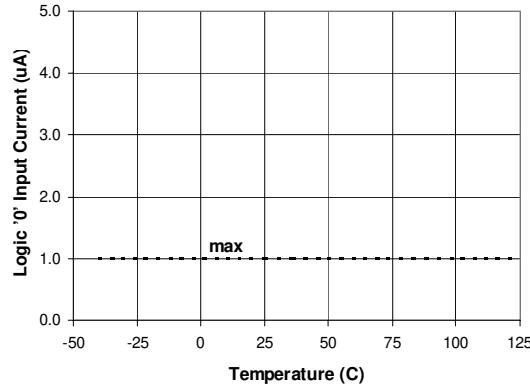


Figure 21A. Logic "0" Input Current vs. Temperature

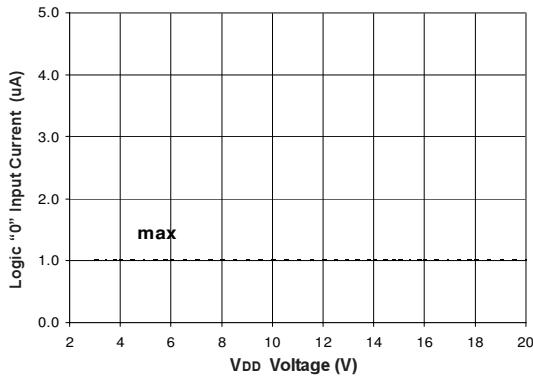


Figure 21B. Logic "0" Input Current vs. V_{DD} Voltage

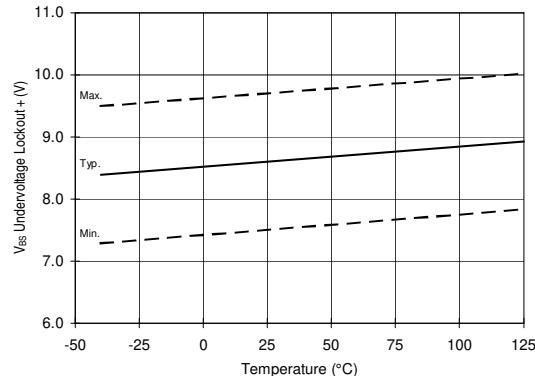


Figure 22. V_{BS} Undervoltage (+) vs. Temperature

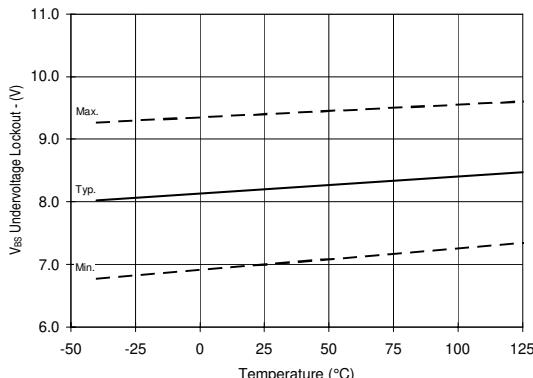


Figure 23. V_{BS} Undervoltage (-) vs. Temperature

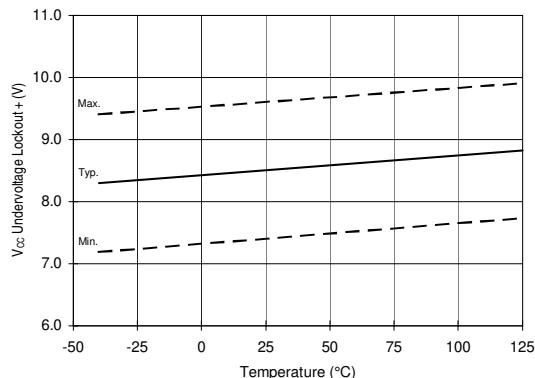


Figure 24. V_{CC} Undervoltage (+) vs. Temperature

IR2010(S)(TR) & (PbF)

International
IR Rectifier

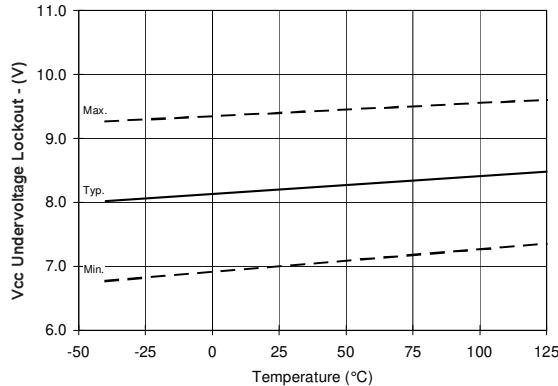


Figure 25. V_{CC} Undervoltage (-) vs. Temperature

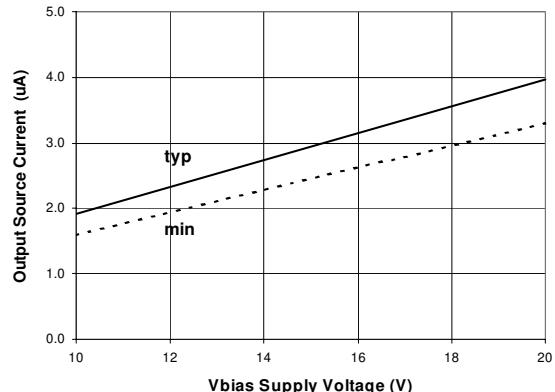


Figure 26B. Output Source Current vs. V_{BIA}S Voltage

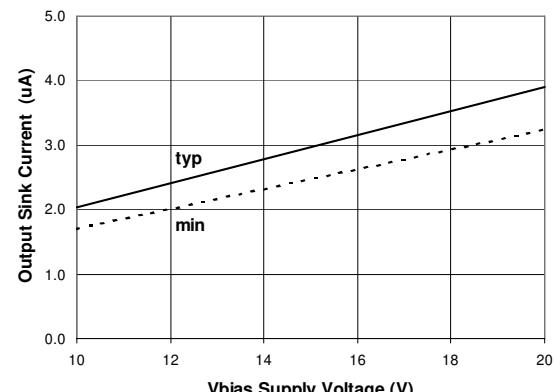


Figure 27B. Output Sink Current vs. V_{BIA}S Voltage

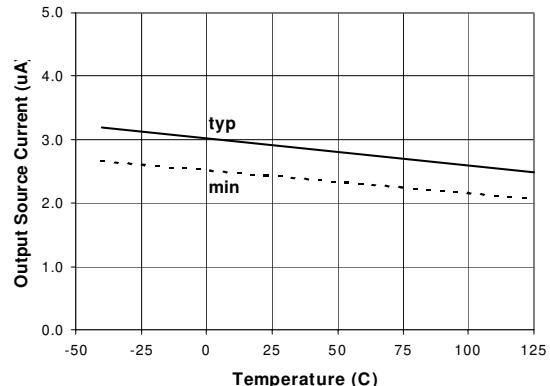


Figure 26A. Output Source Current vs. Temperature

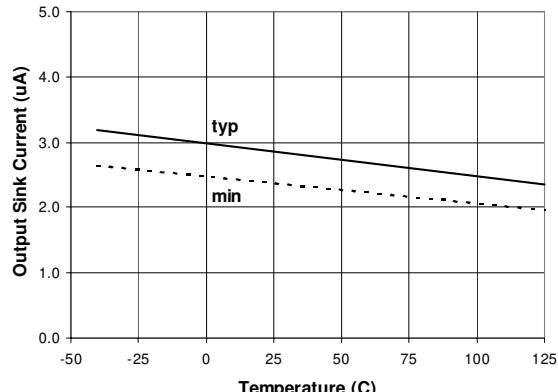


Figure 27A. Output Sink Current vs. Temperature

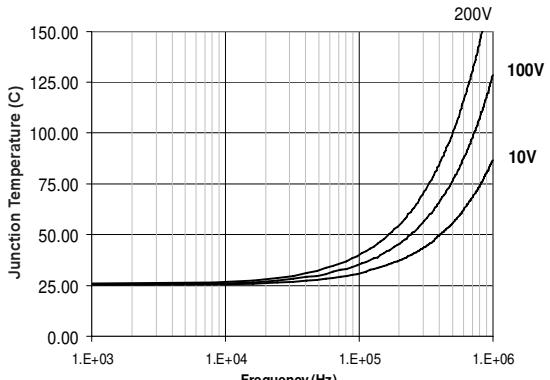


Figure 28. IR2010 T_j vs Frequency
R_{GATE} = 10 Ohm, V_{CC} = 15V with IRFPE50

IR2010(S)(TR) & (PbF)

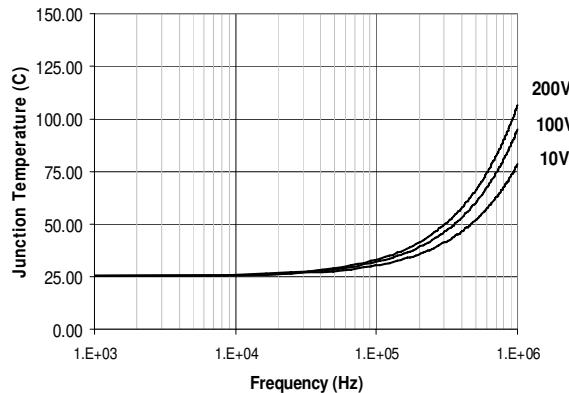


Figure 29. IR2010 T_j vs Frequency
 $R_{GATE} = 16 \text{ Ohm}$, $V_{cc} = 15\text{V}$ with IRFBC40

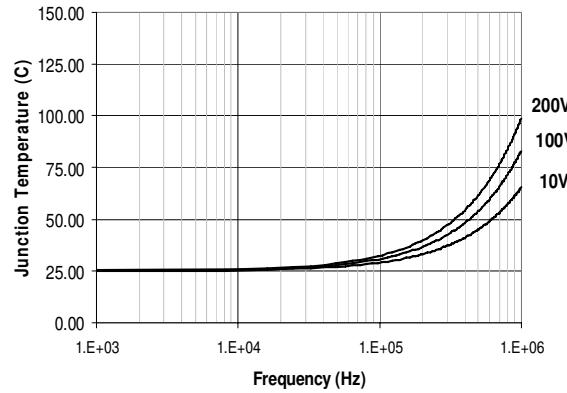


Figure 30. IR2010 T_j vs Frequency
 $R_{GATE} = 22 \text{ Ohm}$, $V_{cc} = 15\text{V}$ with IRFBC30

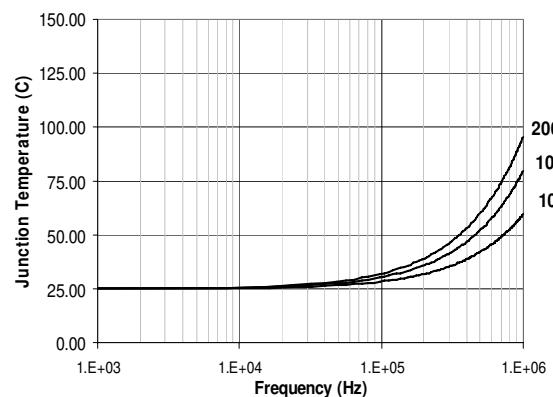


Figure 31. IR2010 T_j vs Frequency
 $R_{GATE} = 33 \text{ Ohm}$, $V_{cc} = 15\text{V}$ with IRFBC20

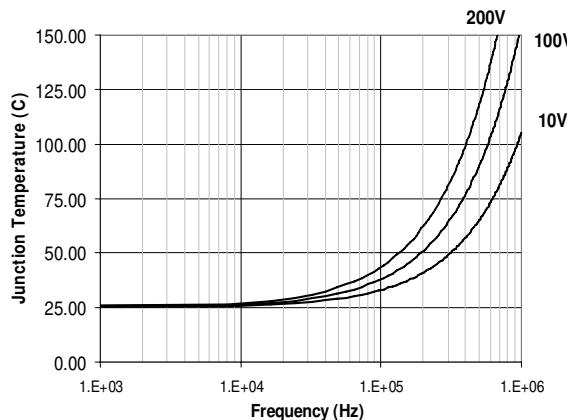


Figure 32. IR2010S T_j vs Frequency
 $R_{GATE} = 10 \text{ Ohm}$, $V_{cc} = 15\text{V}$ with IRFPE50

IR2010(S)(TR) & (PbF)

International
IR Rectifier

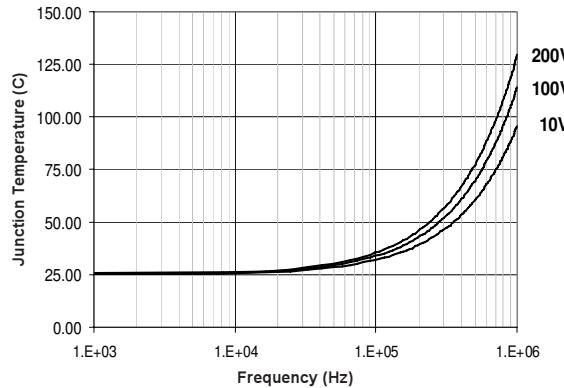


Figure 33. IR2010S T_j vs Frequency
R_{GATE} = 16 Ohm, V_{cc} = 15V with IRFBC40

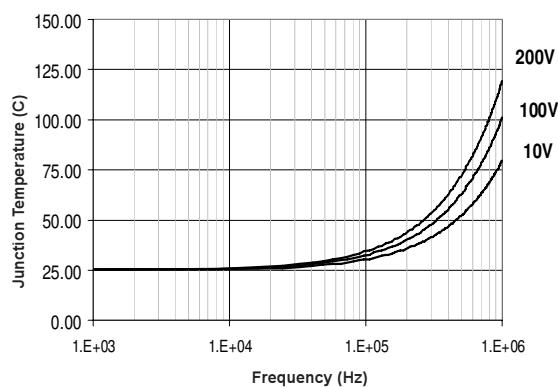


Figure 34. IR2010S T_j vs Frequency
R_{GATE} = 22 Ohm, V_{cc} = 15V with IRFBC30



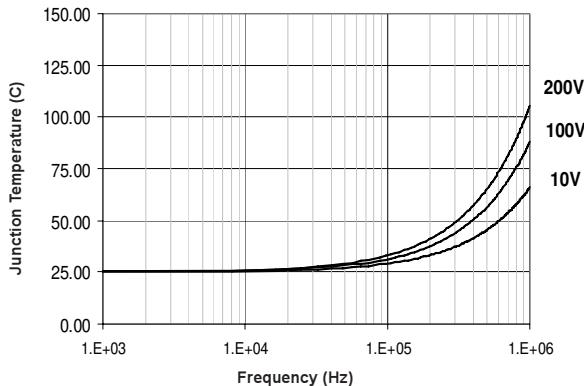


Figure 35. IR2010S T_j vs Frequency
R_{GATE} = 33 Ohm, V_{cc} = 15V with IRFBC20


Case Outlines

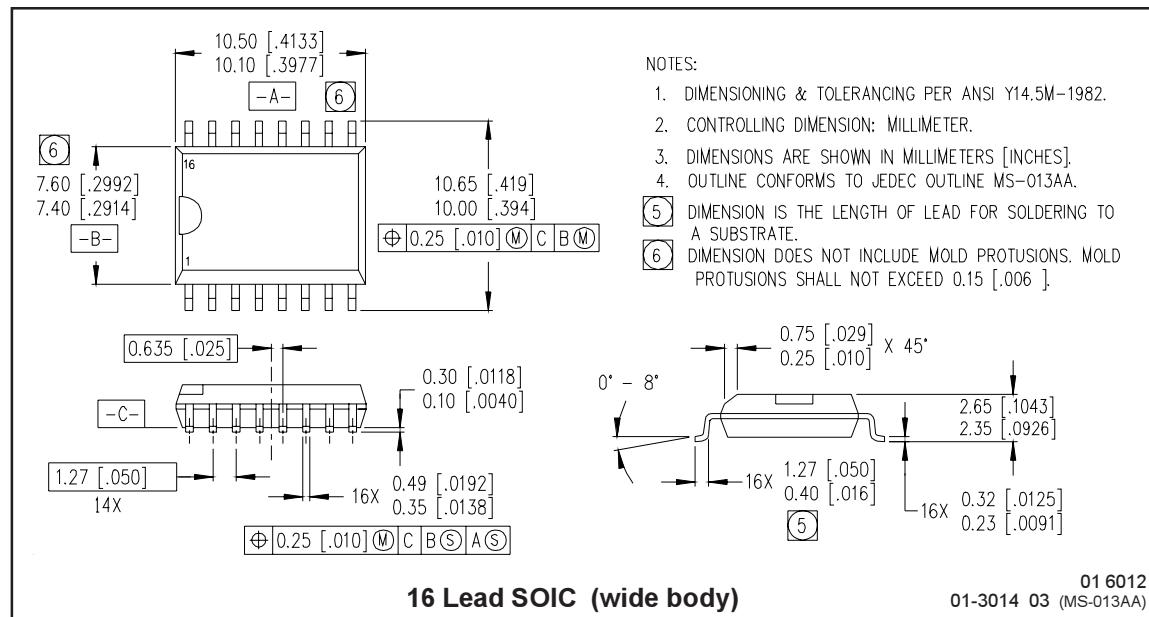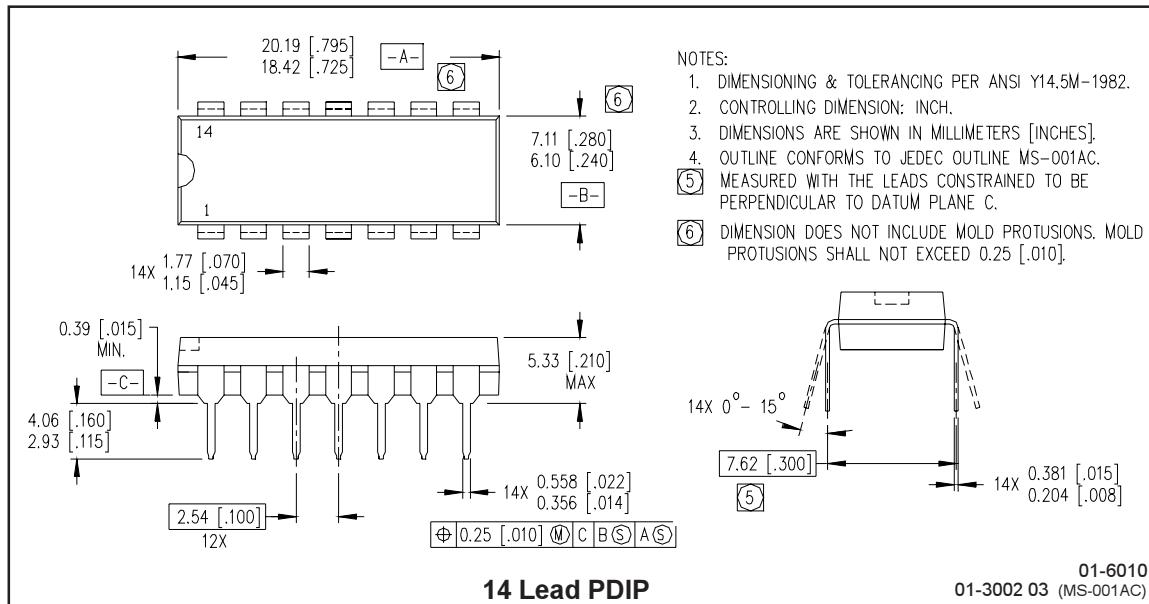

IR2010(S)(TR) & (PbF)


International
IR Rectifier

Tape and Reel Details: SOIC8N

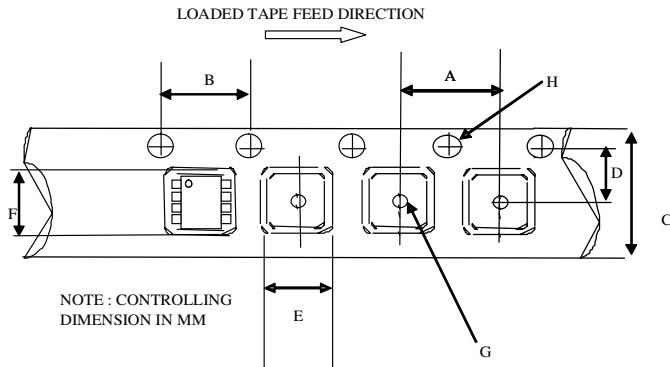

CARRIER TAPE DIMENSION FOR 8SOICN


Code	Metric		Imperial	
	Min	Max	Min	Max
A	7.90	8.10	0.311	0.318
B	3.90	4.10	0.153	0.161
C	11.70	12.30	0.46	0.484
D	5.45	5.55	0.214	0.218
E	6.30	6.50	0.248	0.255
F	5.10	5.30	0.200	0.208
G	1.50	n/a	0.059	n/a
H	1.50	1.60	0.059	0.062

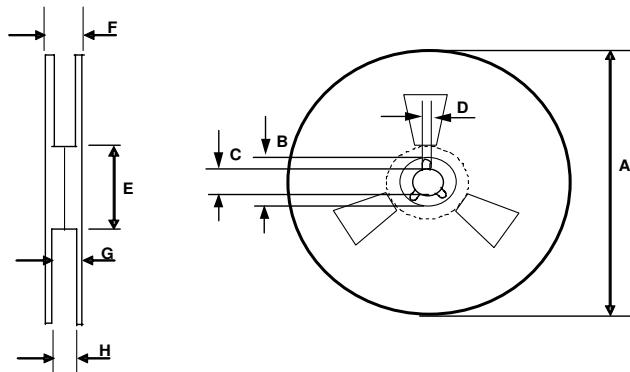

REEL DIMENSIONS FOR 8SOICN

Code	Metric		Imperial	
	Min	Max	Min	Max
A	329.60	330.25	12.976	13.001
B	20.95	21.45	0.824	0.844
C	12.80	13.20	0.503	0.519
D	1.95	2.45	0.767	0.096
E	98.00	102.00	3.858	4.015
F	n/a	18.40	n/a	0.724
G	14.50	17.10	0.570	0.673
H	12.40	14.40	0.488	0.566

LEADFREE PART MARKING INFORMATION

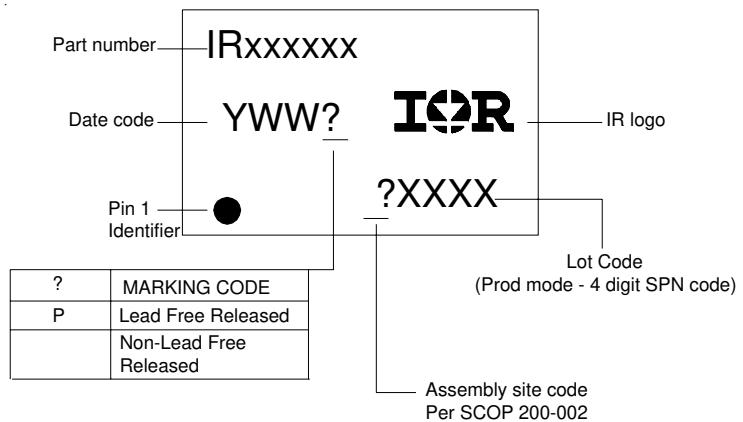

ORDER INFORMATION

Basic Part (Non-Lead Free)

14-Lead PDIP IR2010 order IR2010
16-Lead SOIC IR2010S order IR2010S

Leadfree Part

14-Lead PDIP IR2010 order IR2010PbF
16-Lead SOIC IR2010S order IR2010SPbF
16-Lead SOIC IR2010STR order IR2010STRPbF

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105
This product has been qualified per industrial level
Data and specifications subject to change without notice. 9/12/2004