EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

PORTAFUSIBILI PROTETTI DA PANNELLO
SHOCKSAFE FUSEHOLDERS FOR PANEL

PTF/35

FUSIBILE TIPO
FUSE LINK 5 x 20 mm

MONTAGGIO
MOUNTING PANNELLO
PANEL

Corrente nominale **Rated Current**	A	10 Pending
Tensione nominale **Rated Voltage**	VAC	250
Potenza dissipabile **Rated Power Acceptance**	W	2,5

Corpo isolante **Housing**	—	PBT - UL 94 V0
Temperatura ambiente ammissibile **Admissible ambient air temperature**	°C	-30 °C to 85 °C
Protezione contro le scosse elettriche **Shocksafe category**	PC	PC2
Grado di protezione **Degree of protection**	IP	IP40
Resistenza di contatto **Contact Resistance**	mΩ	< 5

EN 60127-6	Corrente Nominale **Rated Current**	A	10 Pending
	Tensione nominale **Rated Voltage**	VAC	250
	Potenza dissipabile **Rated Power Acceptance**	W	2,5
c UL us UL 512 + C22.2 no. 39	Corrente Nominale **Rated Current**	A	10
	Tensione nominale **Rated Voltage**	VAC	250
	Potenza dissipabile **Rated Power Acceptance**	W	—
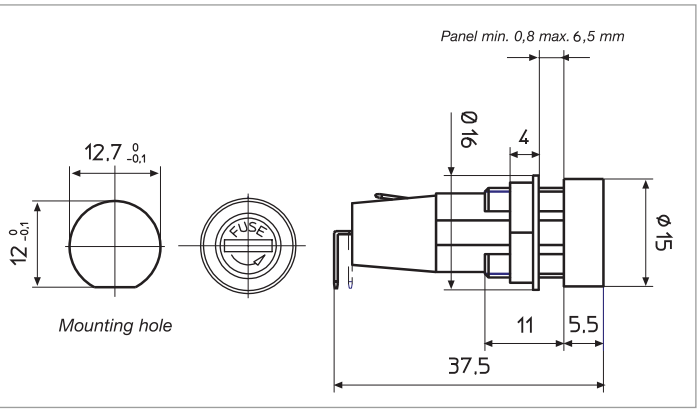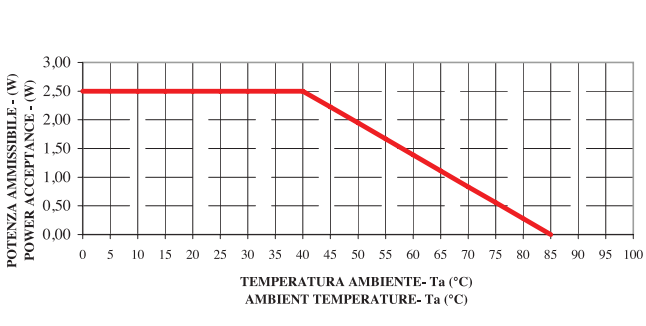
Colore standard **Standard colour**	—	nero - black
Altri colori **Other colours**	—	A richiesta - On demand
Accessori **Accessories**	Pag	
Altri dati **Other information**	Pag	sezione B/A2- section B/A2