

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



# 0.8mm Height 0603 Package Yellow Green Chip LED Technical Data Sheet

Part No:LL-S190GC-2A



Spec No: G010/G008YG Rev No:V.1 Date: Dec/05/2001 Page: 1 OF 9

Approved: JoJo Checked: Bob Drawn: Wu SP190



### **Features**

- ◇ Package in 8mm tape on 7" diameter reel.
- Compatible with automatic lacement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- ♦ Mono-color type.
- ♦ Pb-Free.
- ♦ The product itself will remain within RoHS compliant Version.

### **Descriptions**

- The S190 SMD LED is much smaller than lead frame type Components, thus enable smaller board size, higher packing Density, reduced storage space and finally smaller equipment to be obtained.
- ♦ Besides, lightweight makes them ideal for miniature applications.etc.

## **Applications**


- Automotive:backlighting in dashboard and switch.
- Telecommunication:indicator and backlighting in Telephone and fax.
- ♦ Flat backlight for LCD, switch and symbol.
- ♦ General use.


Spec No: G010/G008YG Rev No:V.1 Date: Dec/05/2001 Page: 2 OF 9


Approved: JoJo Checked: Bob Drawn: Wu SP190




# **Package Dimension:**









| Part NO.     | Material | Lens Color  | Source Color |  |
|--------------|----------|-------------|--------------|--|
| LL-S190GC-2A | GaP      | Water Clear | Yellow Green |  |

### Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is  $\pm 0.10(.004")$  unless otherwise specified.
- 3. Specifications are subject to change without notice

Spec No: G010/G008YG Rev No:V.1 Date: Dec/05/2001 Page: 3 OF 9

Approved: JoJo Checked: Bob Drawn: Wu SP190



# **Absolute Maximum Ratings at Ta=25℃**

| Parameter   | Symbol | MAX                | Unit |
|---|--------|--------------------|------|
| Power Dissipation   | PD     | 70                 | mW   |
| Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width) | IFP    | 60                 | mA   |
| Continuous Forward Current                                | IF     | 25                 | mA   |
| Reverse Voltage   | VR 5   |                    | V    |
| Operating Temperature Range                               | Topr   | -40°C to +85°C     |      |
| Storage Temperature Range                                 | Tstg   | -40℃ to +100℃      |      |
| Soldering Temperature                                     | Tsld   | 260℃ for 5 Seconds |      |

# **Electrical Optical Characteristics at Ta=25** ℃

| Parameter                    | Symbol  | Min. | Тур. | Max. | Unit | Test Condition     |
|------------------------------|---------|------|------|------|------|--------------------|
| Viewing Angle*               | 2 θ 1/2 |      | 140  |      | Deg  | (Note 2)           |
| Forward Voltage              | VF      |      | 2.1  | 2.8  | V    | IF =20mA           |
| Reverse Current              | IR      |      |      | 10   | μA   | V <sub>R</sub> =5V |
| Peak Emission<br>Wavelength  | λр      | 563  | 568  | 573  | nm   | IF=20mA            |
| Dominant<br>Wavelength       | λd      | 565  | 570  | 575  | nm   | IF=20mA (Note 3)   |
| Spectral Line<br>Half-Width  | Δλ      | 35   | 40   | 45   | nm   | IF=20mA            |
| Luminous Intensity (Note 1)* | lv      | 4.0  | 8.0  |      | mcd  | IF =20mA           |

- 1. Luminous Intensity Measurement allowance is ±10%
- 2.  $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity

Spec No: G010/G008YG Rev No:V.1 Date: Dec/05/2001 Page: 4 OF 9

Approved: JoJo Checked: Bob Drawn: Wu SP190



# **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level:90%

LTPD:10%

1)Test Items and Results

|     | TIS ATTA TRESUITS                        | T1                       |   |                |       |
|-----|--|--------------------------|---|----------------|-------|
| No. | Test Item                                | Test<br>Hours/C<br>ycles | Test Conditions                           | Sample<br>Size | Ac/Re |
| 1   | Resistance to<br>Soldering<br>Heat       | 6 Min                    | Tsld=260±5℃,<br>Min. 5sec                 | 25pcs          | 0/1   |
| 2   | Themal<br>Shock                          | 300 Cycles               | H:+100°C 5min ∫<br>10 sec<br>L:-10°C 5min | 25pcs          | 0/1   |
| 3   | Temperature<br>Cycle                     | 300 Cycles               | H:+100°C 15min ∫<br>5min<br>L:-40°C 15min | 25pcs          | 0/1   |
| 4   | High<br>Temperature<br>Storage           | 1000Hrs.                 | Temp:100°C                                | 25pcs          | 0/1   |
| 5   | DC<br>Operating<br>Life                  | 1000Hrs.                 | lf=20mA                                   | 25pcs          | 0/1   |
| 6   | Low<br>Temperature<br>Storage            | 1000Hrs.                 | Temp:-40°C                                | 25pcs          | 0/1   |
| 7   | High<br>Temperature/<br>High<br>Humidity | 1000Hrs.                 | 85℃/85%RH                                 | 25pcs          | 0/1   |

### 2)Critera For Judning The Damage

| Item                  | Symbl | Test Conditions      | Criteria for Judgement |            |  |
|-----------------------|-------|----------------------|------------------------|------------|--|
|                       |       |                      | Min                    | Max        |  |
| Forward Voltage       | VF    | I <sub>F</sub> =20mA | _                      | F.V.*)×1.1 |  |
| Reverse Current       | IR    | VR=5V                | _                      | F.V.*)×2.0 |  |
| Luminous<br>Intensity | IV    | I <sub>F</sub> =20mA | F.V.*)×0.7             | _          |  |


<sup>\*)</sup>F.V.:First Value


Spec No: G010/G008YG Rev No:V.1 Date: Dec/05/2001 Page: 5 OF 9


Approved: JoJo Checked: Bob Drawn: Wu SP190





# Typical Electrical / Optical Characteristics Curves (25℃ Ambient Temperature Unless Otherwise Noted)














Spec No: G010/G008YG Rev No:V.1 Date: Dec/05/2001 Page: 6 OF 9


Approved: JoJo Checked: Bob Drawn: Wu SP190

Lucky Light Electronics Co., Ltd


Http://www.luckylight.cn



# **Reel Dimensions**

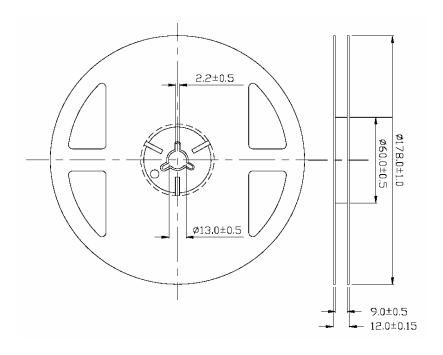

# Carrier Tape Dimensions: Loaded quantity 4000 PCS Per reel

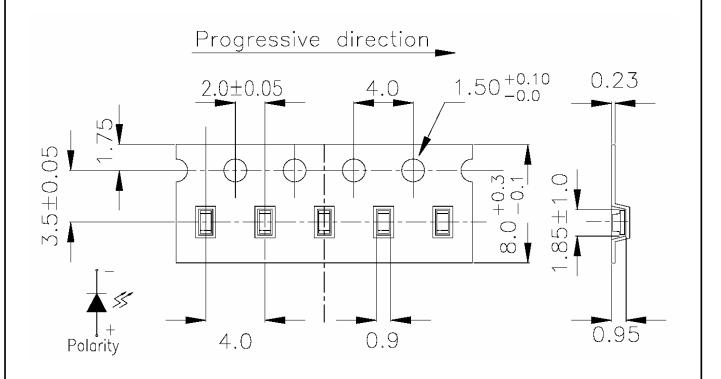

Spec No: G010/G008YG Rev No:V.1 Date: Dec/05/2001 Page: 7 OF 9

Approved: JoJo Checked: Bob Drawn: Wu SP190



# Please read the following notes before using the datasheets

### 1. Over-current-proof


Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30℃ or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30℃ or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture adsorbent material (silica gel)has fabed away or the LEDs have exceeded the storage time,baking treatment should be performed using the following conditions. Baking treatment: $60\pm5\%$  for 24 hours.

### 3. Soldering Condition

3.1 Pb-free solder temperature profile

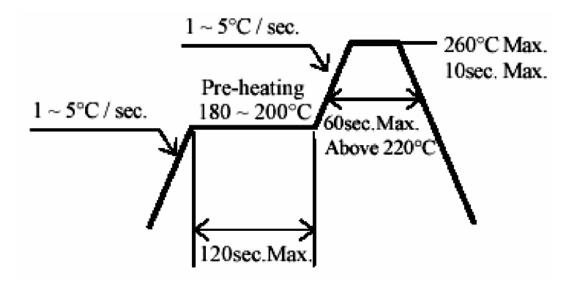

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 260℃ for 5 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering

of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

Spec No: G010/G008YG Rev No:V.1 Date: Dec/05/2001 Page: 8 OF 9


Approved: JoJo Checked: Bob Drawn: Wu SP190



### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand

whether the characteristics of the LEDs will or will not be damaged by repairing.

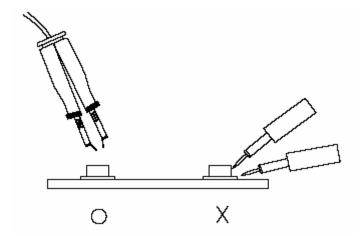

Spec No: G010/G008YG Rev No:V.1 Date: Dec/05/2001 Page: 9 OF 9

Approved: JoJo Checked: Bob Drawn: Wu SP190