



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



SS32A THRU SS310A

肖特基二极管 Schottky Rectifier


■特征 Features

- I_o 3.0A
- V_{RRM} 20V-100V
- 耐正向浪涌电流能力高
High surge current capability
- 封装: 模压塑料
Cases: Molded plastic

■用途 Applications

- 整流用 Rectifier

■外形尺寸和印记 Outline Dimensions and Mark

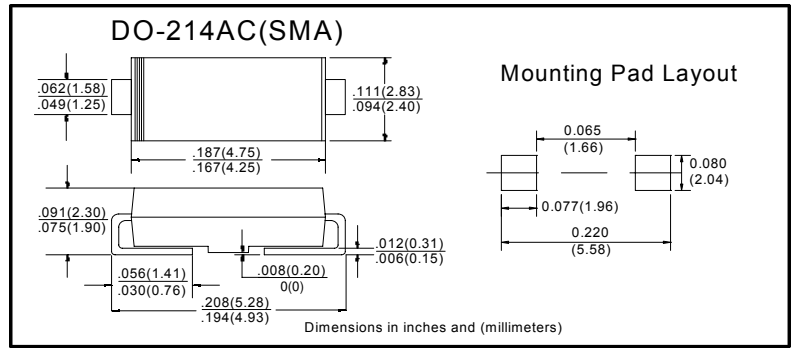

■极限值（绝对最大额定值）

Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Conditions	SS3						
				2A	3A	4A	5A	6A	9A	10A
反向重复峰值电压 Repetitive Peak Reverse Voltage	V _{RRM}	V		20	30	40	50	60	90	100
正向平均电流 Average Forward Current	I _{F(AV)}	A	正弦半波 60Hz, 电阻负载, TL(Fig.1) 60HZ Half-sine wave, Resistance load, TL(Fig.1)	3.0						
正向（不重复）浪涌电流 Surge(Non-repetitive)Forward Current	I _{FSM}	A	正弦半波 60Hz, 一个周期, Ta=25℃ 60Hz Half-sine wave ,1 cycle , Ta =25℃	100						
结温 Junction Temperature	T _J	℃		-55~+125			-55~+150			
储存温度 Storage Temperature	T _{STG}	℃		-55 ~ +150						

■电特性（ $T_a=25^{\circ}C$ 除非另有规定）

Electrical Characteristics ($T_a=25^{\circ}C$ Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	测试条件 Test Condition		SS3						
					2A	3A	4A	5A	6A	9A	10A
正向峰值电压 Peak Forward Voltage	V _F	V	I _F =3.0A		0.50			0.70		0.85	
反向漏电流 Peak Reverse Current	I _{RRM1}	mA	V _{RM} =V _{RRM}	T _a =25℃	0.5					0.1	
	T _a =100℃			10			5.0				
热阻(典型) Thermal Resistance(Typical)	R _{θJ-A}	℃/W	结和环境之间 Between junction and ambient		55 ¹⁾						
	R _{θJ-L}		结和终端之间 Between junction and terminal		17 ¹⁾						

备注: Notes:

¹⁾ 热阻从结到环境及从结到引线, 在电路板的0.2" x 0.2" (5毫米 x 5毫米)铜垫片区

Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5 mm x 5 mm) copper pad areas

■特性曲线（典型） Characteristics(Typical)

图1: 正向电流降额曲线
FIG.1: FORWARD CURRENT DERATING CURVE

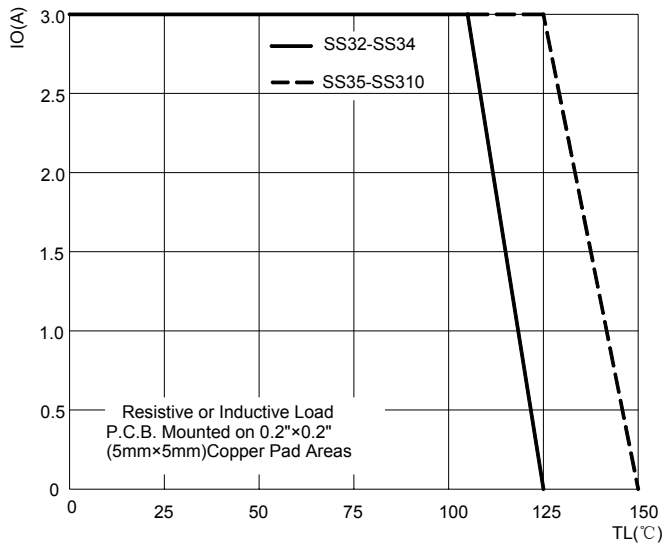


图2: 最大正向浪涌冲击耐受能力
FIG.2: MAXIMUM NON-REPETITIVE FORWARD URGE CURRENT

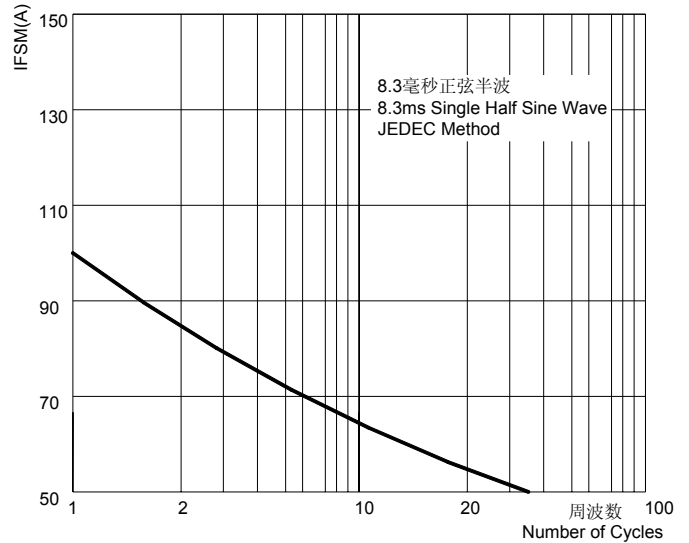


图3: 典型正向特性曲线
FIG.3: TYPICAL FORWARD CHARACTERISTICS

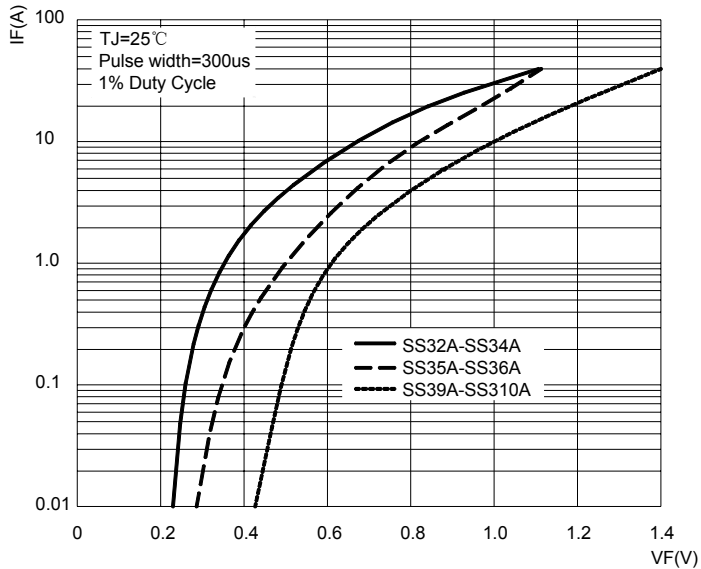


图4: 典型反向特性曲线
FIG.4: TYPICAL REVERSE CHARACTERISTICS

