



**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

**SANYO**

No.2745A

**LA7222****2-Channel 2-Position AV Switch  
for VCR / Audio Use****Features**

- The LA7222 is a 2-channel 2-position high-performance analog switch having wide application from audio band to video band.

**Maximum Ratings at Ta = 25°C**

|                             |                     |             | unit |
|-----------------------------|---------------------|-------------|------|
| Maximum Supply Voltage      | V <sub>CC</sub> max | 15          | V    |
| Allowable Power Dissipation | P <sub>d</sub> max  | 350         | mW   |
| Operating Temperature       | T <sub>opr</sub>    | -20 to +65  | °C   |
| Storage Temperature         | T <sub>stg</sub>    | -55 to +125 | °C   |

**Operating Conditions at Ta = 25°C**

|                            |                    |         | unit |
|----------------------------|--------------------|---------|------|
| Recommended Supply Voltage | V <sub>CC</sub>    | 12      | V    |
| Operating Voltage Range    | V <sub>CC</sub> op | 8 to 13 | V    |


**Operating Characteristics at Ta = 25°C, V<sub>CC</sub> = 12V**

|                             |                   |                                                                                                                                             | min   | typ  | max             | unit             |
|-----------------------------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------|------|-----------------|------------------|
| Current Dissipation         | I <sub>CC</sub>   | No input                                                                                                                                    | 12    | 17   | 22              | mA               |
| Total Harmonic Distortion   | THD               | R <sub>g</sub> = 600Ω, V <sub>IN</sub> = 4.5V <sub>p-p</sub> , f = 1kHz                                                                     | 0.007 | 0.1  |                 | %                |
| Output Noise Voltage        | V <sub>ON</sub>   | R <sub>g</sub> = 600Ω, DIN AUDIO FILTER<br>(20Hz to 20kHz)                                                                                  | -110  | -100 |                 | dBs              |
| Crosstalk (ch-1)            | CR1               | R <sub>g</sub> = 50Ω (no input side R <sub>g</sub> = 500Ω)<br>V <sub>IN</sub> = 2V <sub>p-p</sub> , f = 3.58MHz                             | -57   | -62  |                 | dB               |
| Crosstalk (ch-2)            | CR2               | R <sub>g</sub> = 50Ω (no input side R <sub>g</sub> = 500Ω)<br>V <sub>IN</sub> = 2V <sub>p-p</sub> , f = 3.58MHz                             | -52   | -57  |                 | dB               |
| Maximum Input Voltage       | V <sub>IN</sub>   | R <sub>g</sub> = 600Ω, f = 1kHz, THD = 1%                                                                                                   | 5.0   |      |                 | V <sub>p-p</sub> |
| 2nd Harmonic                | H <sub>2</sub>    | R <sub>g</sub> = 50Ω, V <sub>IN</sub> = 4V <sub>p-p</sub> , f = 1MHz                                                                        | -46   | -55  |                 | dB               |
| 3rd Harmonic                | H <sub>3</sub>    | R <sub>g</sub> = 50Ω, V <sub>IN</sub> = 4V <sub>p-p</sub> , f = 1MHz                                                                        | -46   | -55  |                 | dB               |
| Input Impedance             | z <sub>in</sub>   |                                                                                                                                             |       | 10   |                 | kΩ               |
| Output Impedance            | z <sub>o</sub>    |                                                                                                                                             |       | 30   | 60              | Ω                |
| Switch A Input Hold Voltage | V <sub>CA</sub>   | Pin 2, pin 4 DC                                                                                                                             | 3.8   |      | V <sub>CC</sub> | V                |
| Switch B Input Hold Voltage | V <sub>CB</sub>   | Pin 2, pin 4 DC                                                                                                                             | 0     |      | 2.0             | V                |
| Output DC Offset Voltage    | ΔV <sub>ODC</sub> | Output voltage difference at<br>the time of changeover from<br>switch A to B, and vice versa                                                | -50   | 0    | +50             | mV               |
| Crosstalk between Channels  | CRch              | R <sub>g</sub> = 500Ω, R <sub>L</sub> = ∞<br>Other channel input<br>R <sub>g</sub> = 50Ω, V <sub>IN</sub> = 2V <sub>p-p</sub> , f = 3.58MHz | -58   | -63  |                 | dB               |

**Package Dimensions**

(unit : mm)

3116

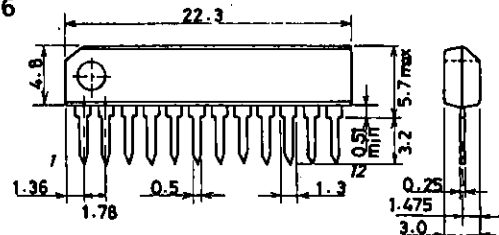


SANYO : SIP12S

**SANYO Electric Co., Ltd. Semiconductor Business Headquarters**


TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

# LA7222




## Test Circuit





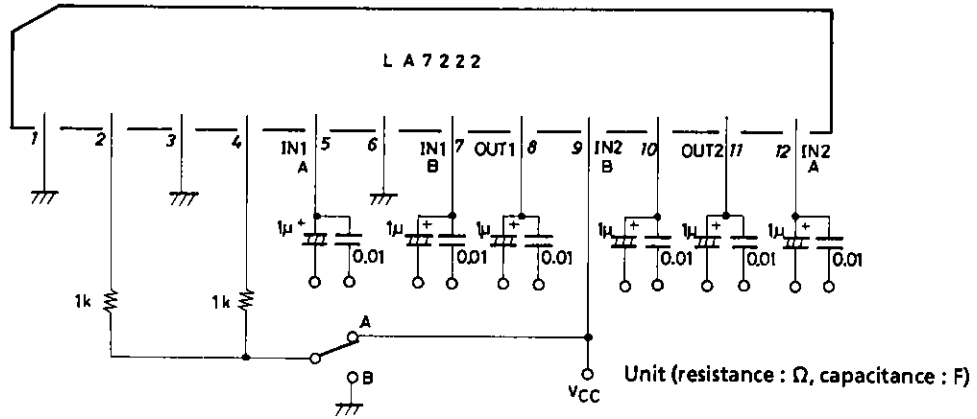


## Equivalent Circuit Block Diagram

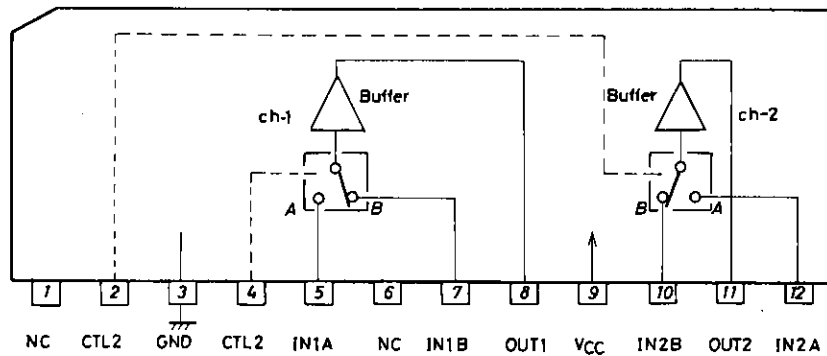

## Input/Output Equivalent Circuit

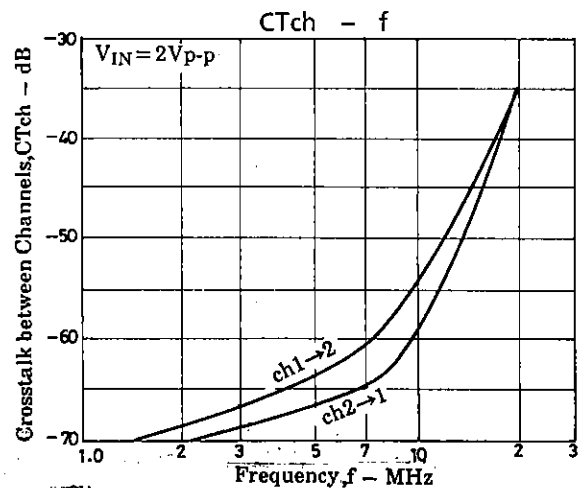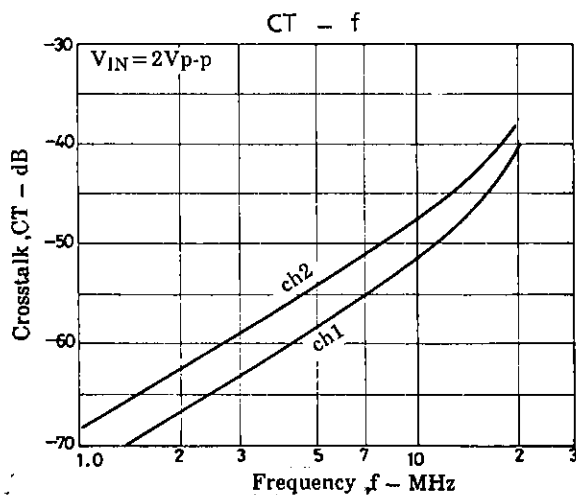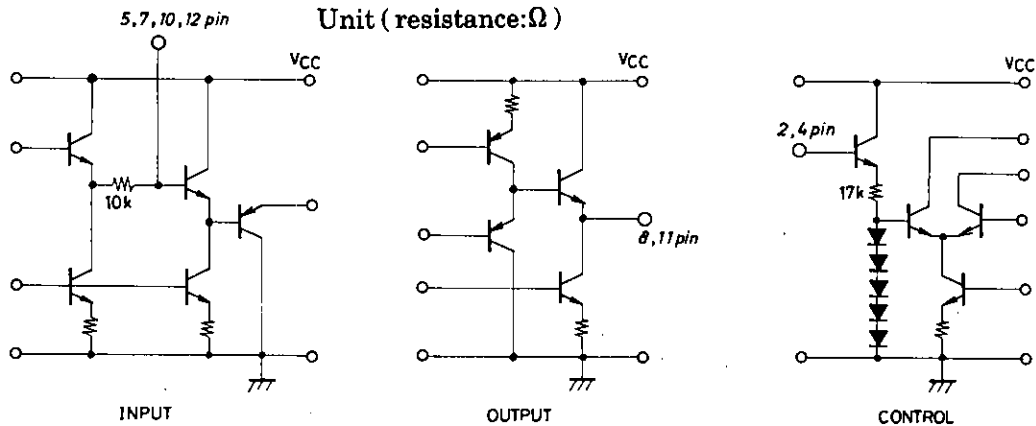

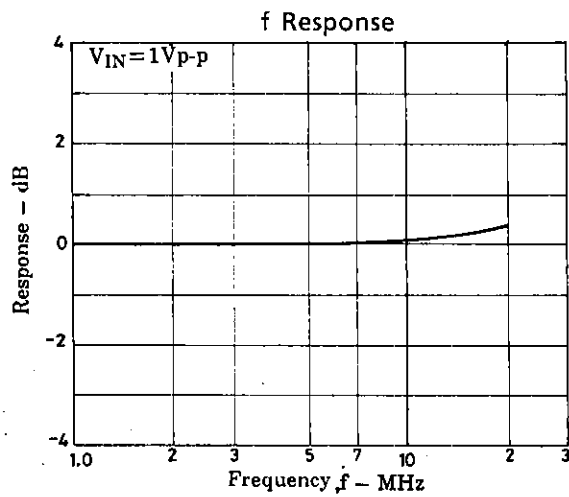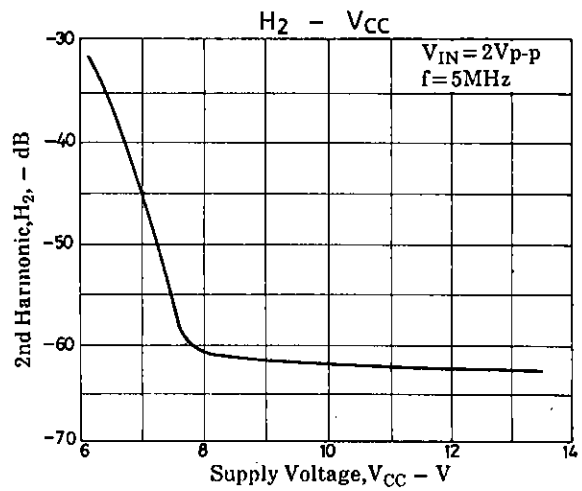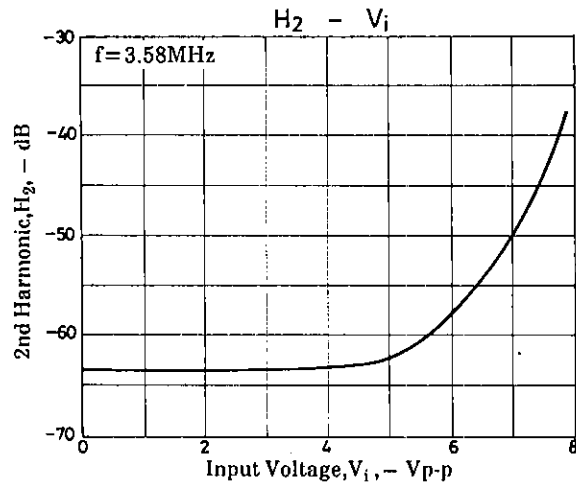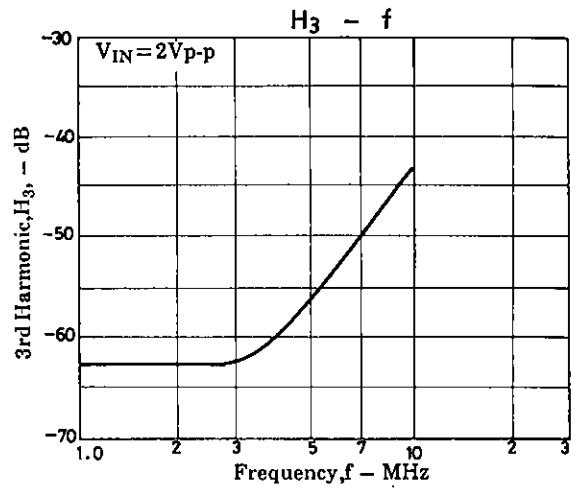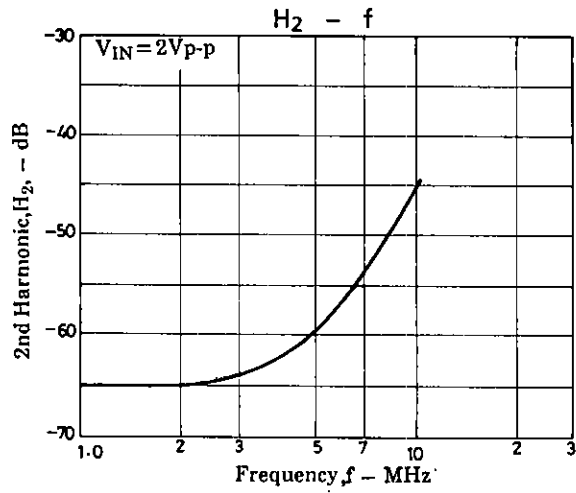

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of **December, 1996**. Specifications and information herein are subject to change without notice.