



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

1 2 3 4 5 6 7 8

A

B

C


D

E

F

G

H

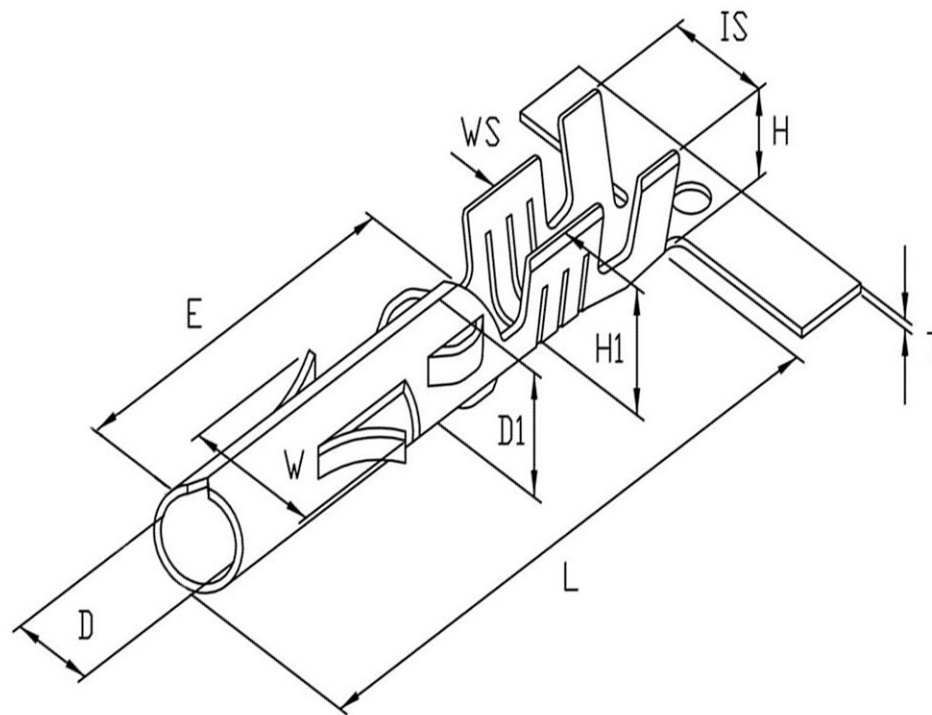

DIMENSION:(MM)

T:0.25±0.03

L:17.8±0.35

E:10.8±0.25

D1:3.0±0.2

D:2.02±0.03

IS:4.0±0.35

WS:2.5±0.35

H:3.2±0.25

H1:2.6±0.25

W:4.2±0.3

MATERIAL:BRASS

THICKNESS:0.25

HARDNESS:SH

PLATING:TIN 40u" MIN

WIRE RANGE:(AWG)18-24 #

INSULATION O.D.:3.7MAX.

VOLTAGE RATING:AC,DC,250V

CURRENT RATING:AC,DC,10A

TEMPERATURE RANGE : -25°C TO +85°C

RoHS
Compliant

Gold Star Connections Co., Ltd.

APPD.
核准

DWG.
製圖

DATE

2019/8/19

2019/8/19

SCALE
比例

UNIT
單位

PAGE
張數

TOLERANCE
容許公差

SIZE
紙張尺寸

REV.
版本

PART NAME 品名

5,08 FEMALE TERMINAL

PART NO.

料號 NCT508-TF24

1 2 3 4 5 6 7 8