



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

"AUTO" FUSE CLIPS & HOLDERS

- Thru hole PC mountable, maintains position during wave soldering
- Holds fuse securely, even after multiple insertions
- Available with orientation legs to assure proper orientation

FOR .205 (5.2) × .025 (.64) STANDARD BLADE FUSES

For Littelfuse ATO 257 series/Bussmann ATC series or equivalent

- Thru hole PC mountable, maintains position during wave soldering
- Holder design prevents solder wicking
- Withstands the rigors of shock and vibration
- Holds fuse securely, even after multiple insertions

VERTICAL FUSE ENTRY


SPECIFICATIONS

Contacts: .016 (.41) thick Brass, Tin Nickel Plate



Insulator: Glass filled Nylon, UL Rated 94V-0

Current Rating: 30 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)



Mounting Detail For Two Clips



CAT. NO. 3522-2

CAT. NO. 3522-3

CAT. NO. 3522

HORIZONTAL FUSE ENTRY

- Designed for low height clearance applications
- Fuse will be inserted parallel to board
- Thru hole PC mountable, maintains position during wave soldering
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time
- Polarized legs assure proper orientation of clips onto board

SPECIFICATIONS



Contacts: .012 (.30) thick Brass, Tin Nickel Plate

Insulator: PBT, UL Rated 94V-0

Current Rating: 30 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)

Mounting Detail For Two Clips

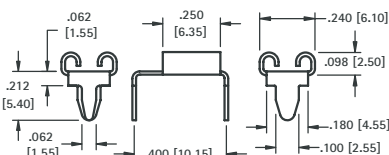


CAT. NO. 3550-2

CAT. NO. 3550


2 IN 1 FUSE HOLDER

For Littelfuse ATO 257 series/Bussmann ATC series, Littelfuse Low Profile Mini 897 series or equivalents

- Accepts Standard Auto Fuses or Low Profile Mini Fuses
- Low insertion force
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time
- Thru hole PC mountable, maintains position during wave soldering



Mounting Detail



SPECIFICATIONS

Contacts: .016 (.41) thick Brass, Tin Nickel Plate

Insulator: PBT, UL Rated 94V-0

Current Rating: 20 Amps @ 500V AC


Temperature Rating: -58°F to +292°F (-50°C to +145°C)

CAT. NO. 3557-2


UNIVERSAL CLIP

For Littelfuse ATO 257 series/Bussmann ATC series, Littelfuse Mini 297 or 997 series/Bussmann ATM series, Littelfuse Low Profile Mini 897 series or equivalents


- Accepts most Auto-Blade Fuses
- Low insertion force
- Thru hole PC mountable, maintains position during wave soldering



Mounting Detail for Standard Auto Fuses and Low Profile Mini Fuse



Mounting Detail for Mini Fuse



SPECIFICATIONS

Contacts: .016 (.41) thick Brass, Tin Nickel Plate

Current Rating: 20 Amps @ 500V AC

CAT. NO. 3557

Marking

"AUTO" FUSE CLIPS & HOLDERS

"MINI" AUTOMOTIVE FUSE CLIPS & HOLDERS

For .110 (2.8) × .032 (.80) MINI BLADE FUSES


For Littelfuse Mini 297 or 997 series/Bussmann ATM series or equivalent

VERTICAL FUSE ENTRY


Thru Hole Mount




- Low Profile



Mounting Detail For Two Clips



Pad Layout For Two Clips




CAT. NO. 3564

AVAILABLE ON TAPE AND REEL

Surface Mount



- Low Profile



CAT. NO. 3563 (Bulk)

CAT. NO. 3563TR (Tape & Reel)

Tape & Reel Spec's: 24mm wide; 12mm pitch; 13 inch reel (1500 pieces per reel)


SPECIFICATIONS

Material: .012 (.30) thick Brass, Tin Nickel Plate


Insulator: Glass filled Nylon, UL Rated 94V-0

Current Rating: 30 Amps @ 500V AC


Temperature Rating: -58°F to +292°F (-50°C to +145°C)



Mounting Detail For Two Clips




CAT. NO. 3544




CAT. NO. 3544-2

LOW PROFILE MINI FUSE HOLDER

For Littelfuse Low Profile Mini 897 series or equivalent



Mounting Detail



- Low insertion force
- Thru hole PC mountable, maintains position during wave soldering
- Fuse holder fully insulates clips to protect fuse from shorting
- Holder assures proper spacing and reduces assembly time

SPECIFICATIONS

Contacts: .016 (.41) thick Brass, Tin Nickel Plate

Insulator: PBT, UL Rated 94V-0


Current Rating: 20 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)



Refer to page 35 for Cat. No. 3557 Clip details


Mounting Detail



CAT. NO. 3557-2

MINI FUSE HOLDER

For Littelfuse Mini 297 or 997 series/Bussmann ATM or equivalents



CAT. NO. 3568

HORIZONTAL FUSE ENTRY

For Littelfuse Mini 297 or 997 series/Bussmann ATM series or equivalent


SPECIFICATIONS

Contacts: .012 (.30) thick Brass, Tin Nickel Plate


Insulator: PBT, UL Rated 94V-0

Current Rating: 30 Amps @ 500V AC


Temperature Rating: -58°F to +292°F (-50°C to +145°C)

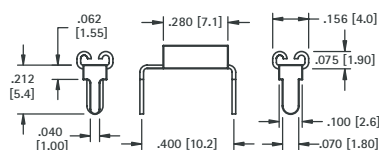

Mounting Detail For Two Clips



CAT. NO. 3549

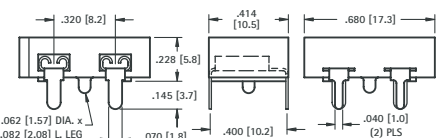

CAT. NO. 3549-2