



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 18/07/05		

NOTES:

1. MATERIALS

- . Insulator: thermoplastic,UL 94V-0 Rated
- . Contacts: Copper Alloy
- . Shell: Copper Alloy


2. SPECIFICATION

- . Contact resistance: 50mΩ max.
- . Insulation resistance: 100MΩ min.
- . Dielectric withstanding voltage: 100 VAC 1 minute.
- . Temperature range: -40°C to +80°C.

3. PRODUCT NUMBER CODE:

DS1114 - X X X X X

- Packing type
R:Tape on reel
B:Tube
- MYLAR SUPPORT
S:W/ mylar
X:W/O mylar
- Contact plating
0: selective gold flash
C: selective 3u" gold
1: selective 10u" gold
- Shell plating
6: Tin
N: Nickel
- Color of housing
B: Black

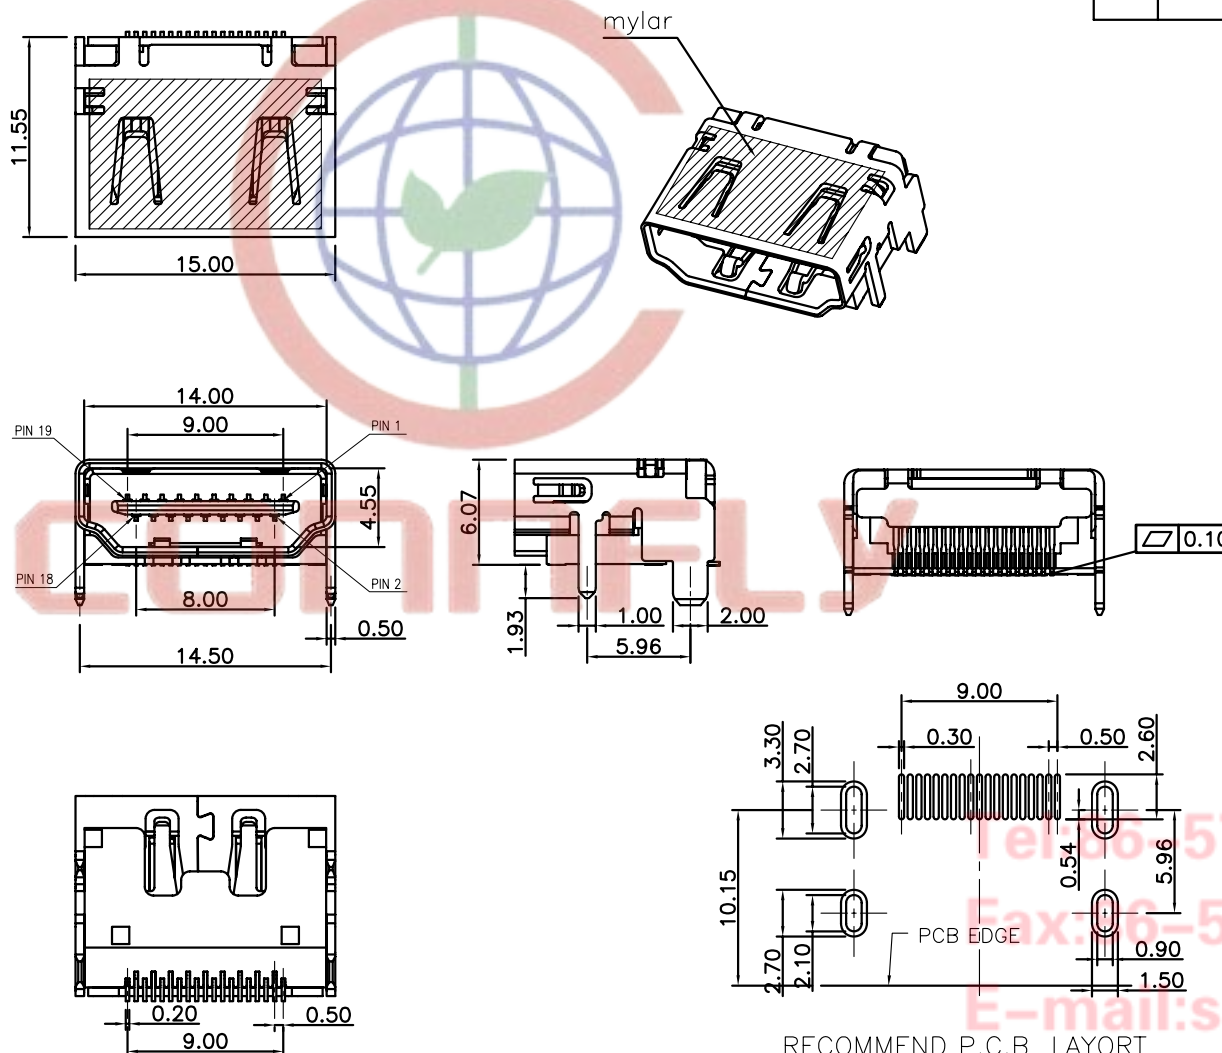

RECOMMEND P.C.B LAYORT
(Tolerance±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	UNIT	TITLE
X.	±0.60	X.	±5°	mm		HDMI 19PIN Female SMT WITHOUT FLANGE
.X	±0.38	.X	±3°	A4		
.XX	±0.25	.XX	±2°			
DRAWING TYPE		CUSTOMER		SERIES		
SCALE		1:1		DS1114		
DRAWING NO.		C-DS1114-XXXXX				



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD