



EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

SPECIFICATION SHEET

Type	Unit	LD-BZEN-1205
Rated voltage	V	5
Operating Voltage	V	3-8
*Rated Current (MAX)	mA	40
* Min Sound Output at 10 cm	dB	85
Coil Resistance	Ω	47 ± 5
*Resonant Frequency	Hz	2400
Operating Temperature	$^{\circ} \text{C}$	-20 - +70
Storage Temperature	$^{\circ} \text{C}$	-30 - +80
Housing Material	NORYL	
Weight	g	2

*Value Applying at Rated Voltage(resonant frequency,1/2 duty,square wave)

DIMENSIONS UNIT:mm Tolerance: $\pm 0.5\text{mm}$

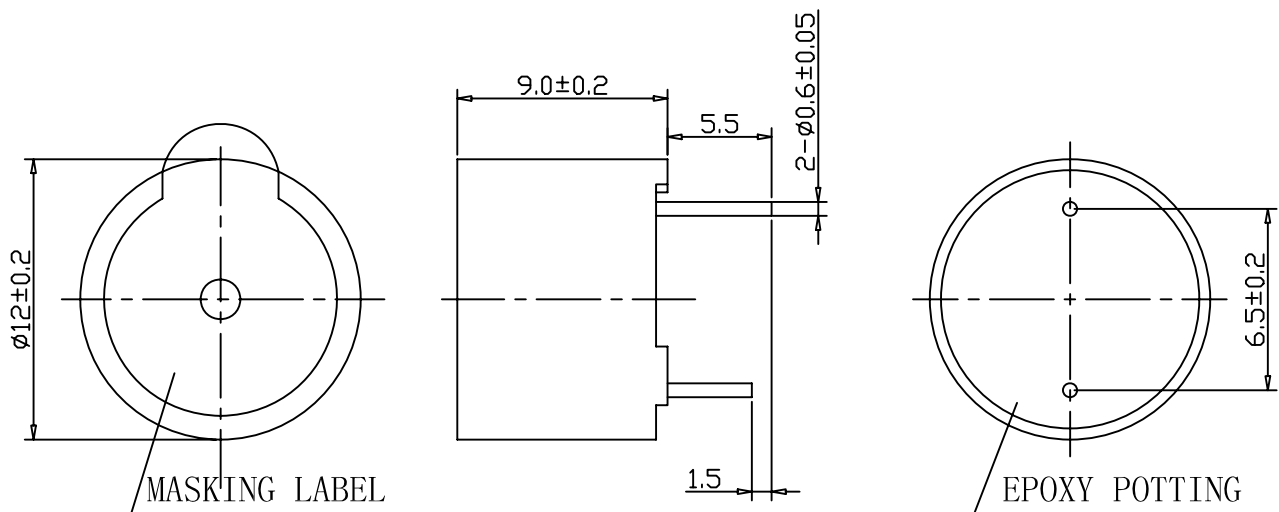

Wave Solder And Wash Allowed