



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

SURFACE MOUNT ALUMINUM ELECTROLYTIC

SV

General Purpose
Series


- Features : 105°C 1000 hours , Higher temperature range Than GV, Low profile vertical chip
- Recommended Applications: Suitable for AV(TV,Video,Audio),Monitor/Computer, OA/HA/Communication
- Corresponding product to RoHS



Specifications

Item	Characteristics																																							
Operating Temperature Range	-40 ~ +105℃																																							
Rated Voltage Range (WV)	4 ~ 100VDC																																							
Capacitance Range	1 ~ 1500μF																																							
Capacitance Tolerance	± 20 % at 120Hz , 20℃																																							
Leakage Current (MAX) (20℃)	I ≤ 0.01CV or 3(μA) , whichever is greater. (After rated voltage applied for 2 minutes) I= Leakage Current (μA) C= Nominal Capacitance (μF) V= Rated Voltage (V)																																							
Dissipation Factor (MAX) (tanδ) (120Hz ,20℃)	Shown in the table of standard rating																																							
Low Temperature Stability Impedance Ratio (MAX)	<table><tr><td> WV Z(120HZ) </td><td>4</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td>Z(-25℃) / Z(20℃)</td><td>7</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z(-40℃) / Z(20℃)</td><td>15</td><td>8</td><td>6</td><td>4</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table>	WV Z(120HZ)	4	6.3	10	16	25	35	50	63	100	Z(-25℃) / Z(20℃)	7	4	3	2	2	2	2	2	2	Z(-40℃) / Z(20℃)	15	8	6	4	4	3	3	3	3									
WV Z(120HZ)	4	6.3	10	16	25	35	50	63	100																															
Z(-25℃) / Z(20℃)	7	4	3	2	2	2	2	2	2																															
Z(-40℃) / Z(20℃)	15	8	6	4	4	3	3	3	3																															
Endurance	After applying rated voltage for 1000hrs at 105℃ , the capacitors shall meet the following requirements. <table><tr><td>Capacitance Change</td><td>Within ±20% of the initial value</td></tr><tr><td>Dissipation Factor</td><td>Not more than 200% of the specified value</td></tr><tr><td>Leakage Current</td><td>Not more than the specified value</td></tr></table>										Capacitance Change	Within ±20% of the initial value	Dissipation Factor	Not more than 200% of the specified value	Leakage Current	Not more than the specified value																								
Capacitance Change	Within ±20% of the initial value																																							
Dissipation Factor	Not more than 200% of the specified value																																							
Leakage Current	Not more than the specified value																																							
Shelf Life	After placed at 105℃ without voltage applied for 1000 hours, the capacitor shall meet the same requirement as Endurance.																																							

Diagram of Dimensions(mm)

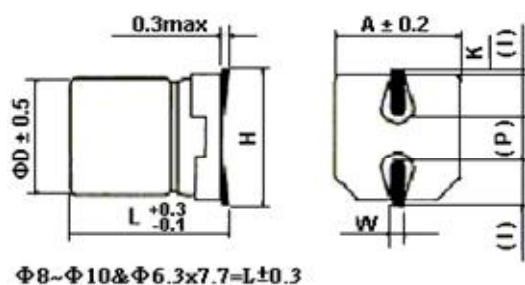

() : Reference size

ψD	L	A	H	I	W	P	K
4.0	5.4	4.3	5.5 Max	1.8	0.65±0.1	1.0±0.2	0.35 +0.15 -0.20
5.0	5.4	5.3	6.5 Max	2.2	0.65±0.1	1.5±0.2	0.35 +0.15 -0.20
6.3	5.4	6.6	7.8 Max	2.6	0.65±0.1	1.8±0.2	0.35 +0.15 -0.20
6.3	7.7	6.6	7.8 Max	2.6	0.65±0.1	1.8±0.2	0.35 +0.15 -0.20
8.0	10.2	8.3	10.0 Max	3.4	0.90±0.2	3.1±0.2	0.70 ±0.2
10.0	10.2	10.3	12.0 Max	3.5	0.90±0.2	4.6±0.2	0.70 ±0.2

Multiplier for Ripple Current

Frequency coefficient

Frequency (Hz)	60	120	1K	10K
Coefficient	0.85	1.00	1.15	1.25

SURFACE MOUNT ALUMINUM ELECTROLYTIC

SV

General Purpose
Series

■ Dimensions, Max Dissipation Factor, Max Permissible Ripple Current

Capacitance (μF)	Rated (Surge) Voltage											
	4(5)			6.3(8)			10(13)			16(20)		
	Size	tanδ	Ripple	Size	tanδ	Ripple	Size	tanδ	Ripple	Size	tanδ	Ripple
4.7										4x5.4	0.16	20
10							4x5.4	0.30	24	4x5.4	0.16	28
22	4x5.4	0.35	20	4x5.4	0.30	29	4x5.4	0.30	36	5x5.4	0.16	39
33	4x5.4	0.35	26	4x5.4	0.3	43	4x5.4	0.30	45	5x5.4	0.20	39
47	4x5.4	0.35	34	4x5.4	0.30	43	5x5.4	0.30	46	6.3x5.4	0.20	65
				5x5.4	0.30	46	6.3x5.4	0.30	70	6.3x5.4	0.20	70
100	5x5.4	0.35	61	5x5.4	0.35	47	6.3x5.4	0.30	71	6.3x5.4	0.20	70
				6.3x5.4	0.35	71	6.3x7.7	0.30	110	6.3x7.7	0.20	130
220	6.3x5.4	0.35	82	6.3x5.4	0.35	74	6.3x7.7	0.30	115	6.3x7.7	0.20	105
				6.3x7.7	0.35	120	8x10.2	0.26	160	8x10.2	0.20	150
330				6.3x7.7	0.35	175	8x10.2	0.26	200	8x10.2	0.20	170
				8x10.2	0.35	230				10x10.2	0.20	230
470				8x10.2	0.35	300	8x10.2	0.26	230	8x10.2	0.20	230
680							10x10.2	0.26	270	10x10.2	0.20	340
1000				8x10.2	0.35	300	10x10.2	0.26	390	10x10.2	0.20	380
1000				10x10.2	0.35	400						
				10x10.2	0.35	480						
1500				10x10.2	0.35	480						

Capacitance (μF)	Rated (Surge) Voltage								
	25(32)			35(44)			50(63)		
	Size	tanδ	Ripple	Size	tanδ	Ripple	Size	tanδ	Ripple
1							4x5.4	0.12	10
2.2				4x5.4	0.12	15	4x5.4	0.12	16
3.3				4x5.4	0.12	18	4x5.4	0.12	16
4.7	4x5.4	0.14	22	4x5.4	0.12	22	5x5.4	0.12	23
10	4x5.4	0.14	22	4x5.4	0.12	25	6.3x5.4	0.12	35
	5x5.4	0.14	28	5x5.4	0.12	30			
22	5x5.4	0.14	35	5x5.4	0.14	35	6.3x7.7	0.12	65
	6.3x5.4	0.14	55	6.3x5.4	0.14	60			
33	5x5.4	0.14	45	6.3x5.4	0.14	60	6.3x7.7	0.12	70
	6.3x5.4	0.16	65	6.3x7.7	0.14	84	8x10.2	0.12	91
47	6.3x5.4	0.16	70	6.3x7.7	0.14	84	6.3x7.7	0.12	75
	6.3x7.7	0.16	91	8x10.2	0.14	98	8x10.2	0.12	95
100	6.3x7.7	0.16	95	6.3x7.7	0.14	105	8x10.2	0.12	110
	8x10.2	0.16	130	8x10.2	0.14	120	10x10.2	0.12	145
220	8x10.2	0.16	160	8x10.2	0.14	170	10x10.2	0.12	210
	10x10.2	0.16	273	10x10.2	0.14	240			
330	8x10.2	0.16	180	10x10.2	0.14	250			
	10x10.2	0.16	340						
470	10x10.2	0.16	360						

Capacitance (μF)	Rated (Surge) Voltage					
	63(79)			100(125)		
	Size	tanδ	Ripple	Size	tanδ	Ripple
3.3				8x10.2	0.18	30
4.7	6.3x5.4	0.18	20	8x10.2	0.18	50
10	6.3x5.4	0.18	20	8x10.2	0.18	55
22	8x10.2	0.18	30	10x10.2	0.18	60
33	8x10.2	0.18	30	10x10.2	0.18	65
47	8x10.2	0.18	45	10x10.2	0.18	65
100	10x10.2	0.18	60			

☆Size:D×L(mm). ☆tanδ:20℃,120Hz. ☆Ripple Current: 105℃,120Hz,(mA/rms).