



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.



DC COMPONENTS CO., LTD.

DISCRETE SEMICONDUCTORS

2SD965

TECHNICAL SPECIFICATIONS OF NPN EPITAXIAL PLANAR TRANSISTOR

Description


Designed for use as AF output amplifier and flash unit.

Pinning

- 1 = Emitter
- 2 = Collector
- 3 = Base

Absolute Maximum Ratings($T_A=25^{\circ}\text{C}$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	40	V
Collector-Emitter Voltage	V_{CE0}	20	V
Emitter-Base Voltage	V_{EB0}	7	V
Collector Current	I_C	5	A
Total Power Dissipation	P_D	750	mW
Junction Temperature	T_J	+150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 to +150	$^{\circ}\text{C}$

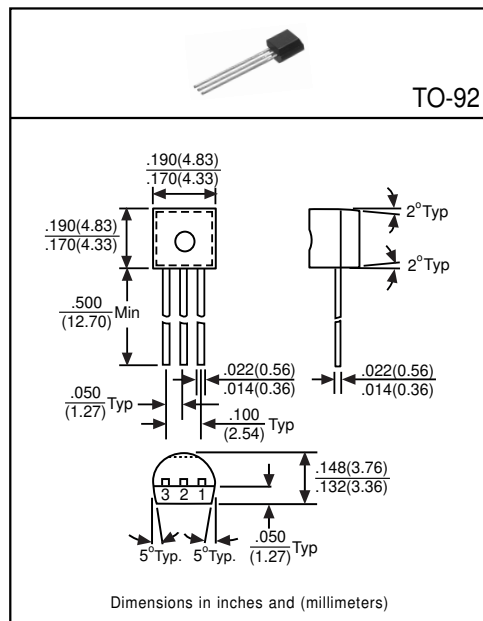

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Collector-Base Breakdown Volatge	BV_{CB0}	40	-	-	V	$I_C=100\mu\text{A}$, $I_E=0$
Collector-Emitter Breakdown Voltage	BV_{CE0}	20	-	-	V	$I_C=1\text{mA}$, $I_B=0$
Emitter-Base Breakdown Volatge	BV_{EB0}	7	-	-	V	$I_E=10\mu\text{A}$, $I_C=0$
Collector Cutoff Current	I_{CB0}	-	-	0.1	μA	$V_{CB}=10\text{V}$, $I_E=0$
Emitter Cutoff Current	I_{EB0}	-	-	0.1	μA	$V_{EB}=7\text{V}$, $I_C=0$
Collector-Emitter Saturation Voltage ⁽¹⁾	$V_{CE(sat)}$	-	0.35	1	V	$I_C=3\text{A}$, $I_B=100\text{mA}$
DC Current Gain ⁽¹⁾	h_{FE1}	230	-	800	-	$I_C=0.5\text{A}$, $V_{CE}=2\text{V}$
	h_{FE2}	150	-	-	-	$I_C=2\text{A}$, $V_{CE}=2\text{V}$
Transition Frequency	f_T	-	150	-	MHz	$I_E=50\text{mA}$, $V_{CE}=6\text{V}$
Output Capacitance	C_{ob}	-	-	50	pF	$V_{CB}=20\text{V}$, $f=1\text{MHz}$, $I_E=0$

(1)Pulse Test: Pulse Width $\leq 380\mu\text{s}$, Duty Cycle $\leq 2\%$

Classification of hFE1

Rank	Q	R	S
Range	230~380	340~600	560~800