



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

1

2

3

4


5

6

7


FOR
客户名称APPROVED
客户确认签字ATTN
销售负责人

The shaded part is illuminated

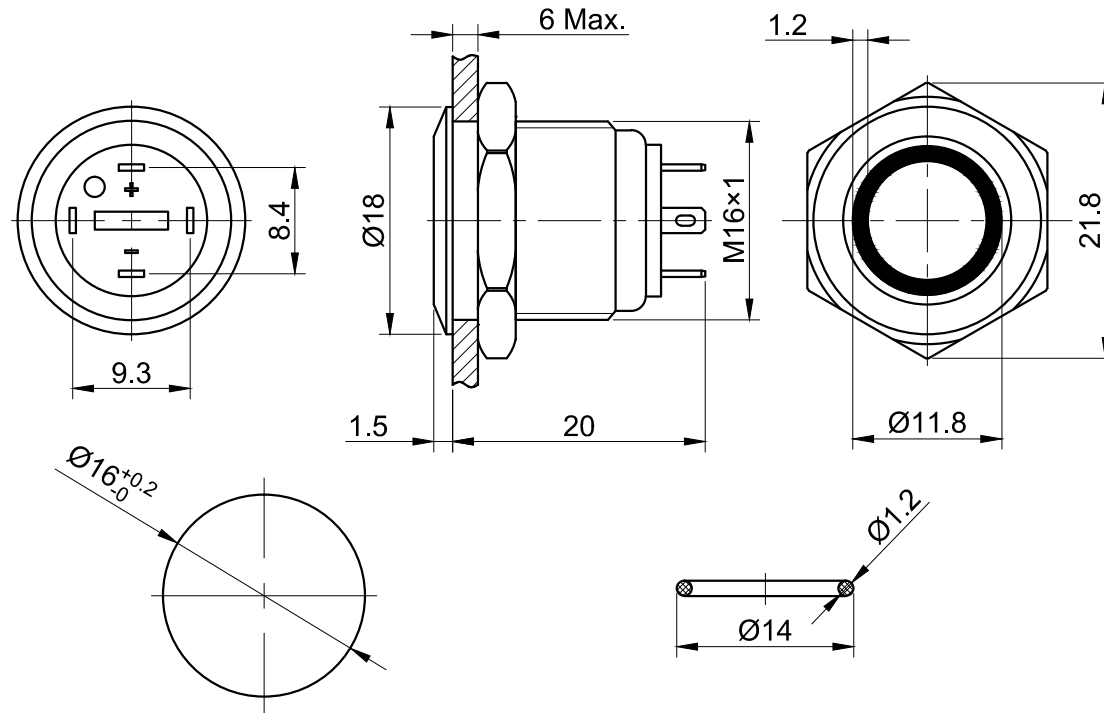PANEL CUTOUT
MAX.PANEL THICKNESS
6 mm

Seal Ring

Switching Operation



Part Number:GQ16F-10E/J/△/▲/◎

"△"	Lamp Color	"▲"	Lamp Voltage	"◎"	Crust Material
R	Red	6V	AC/DC 6V	A	Al alloy(Black)
G	Green	12V	AC/DC 12V	S	Stainless Steel
Y	Yellow	24V	AC/DC 24V		
B	Blue	220V	AC/DC 220V		
W	White				

SPECIFICATIONS:

- 1.Switch Rating: AC220V/0.5A, DC36V/2A.
- 2.Mechanical Life: ≥1,000,000cycles.
- 3.Electrical Life: ≥200,000cycles(DC36V);
≥50,000cycles(AC220V).
- 4.Contact Resistance: ≤50mΩ.
- 5.Insulation Resistance: ≥1,000MΩ.
- 6.Dielectric Strength: 1,500V, RMS 50Hz, 1min.
- 7.Operating Temperature: -25℃~ +55℃(No Freezing).
- 8.Operating Force: About 4N.
- 9.Operating Travel: About 2mm.
- 10.Torque: About 0.6Nm max.applied to nut.
- 11.Protection degree: IP65,IP67(made to order);IK08.
- 12.Terminal Type: Pin Terminal(2 x 0.5mm).

MATERIALS:

- 1.Contact: Silver alloy.
- 2.Button: ◎.
- 3.Body: ◎.
- 4.Base: PA.

BRAND 品牌		ONPOW		红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.				USED 用途		APPD 审核 CH 2020/03/04	
				FINISH 处理		CHKD 校对 NCH 2020/03/04	
				SCALE 比例 1.6 : 1		DR. 制图 ZPD 2020/03/04	
				UNIT 单位 mm			
				TITLE 名称 GQ Series Anti-vandal push button			
DIMENSIONS		TOLERANCE		DWG NO. 图号 GQ16F-10E-J		SIZE 图纸 A4	
0.00 TO 18.00mm		±0.43mm					
18.01 TO 30.00mm		±0.52mm					
30.01 TO 50.00mm		±0.62mm					
50.01 TO 80.00mm		±0.74mm					
FILE NAME 档案名称 GQ16-10EJ.DWG				SHEET 张 1 / 1		REV. 更改 1	