


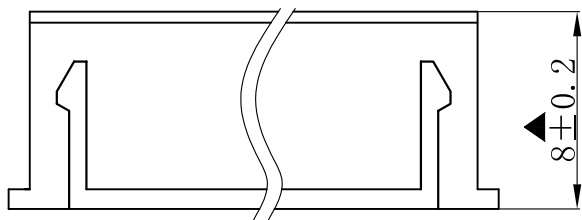


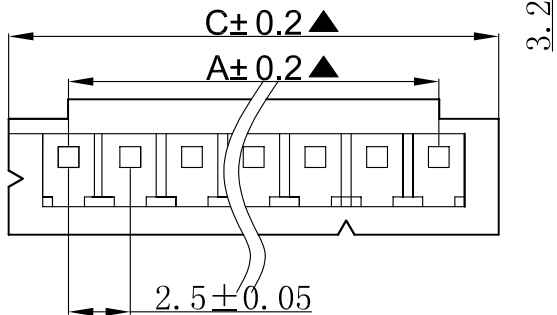

EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

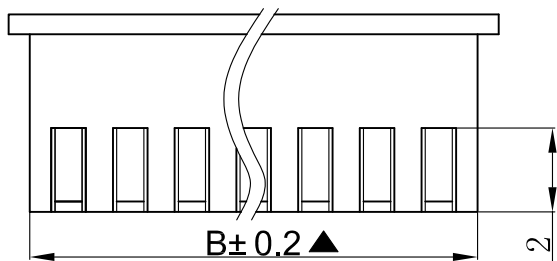

技术参数:

孔位: 2-16孔

间距: 2.5mm

适用线规: #22~#32

温度范围: -25° ~85C°

额定电压: 250V DC/AC

额定电流: 3A


接触电阻: ≤20MΩ





绝缘电阻: ≥1000MΩ

耐压: 1000V Ac/分钟

材料: 0520料

孔位	2	3	4	5	6	7	8	9
A	2.5	5	7.5	10	12.5	15	17.5	20
B	5.7	8.2	10.7	13.2	15.7	18.2	20.7	23.2
C	7.5	10	12.5	15	17.5	20	22.5	25
孔位	10	11	12	13	14	15	16	
A	22.5	25	27.5	30	32.5	35	37.5	
B	25.7	28.2	30.7	33.2	35.7	38.2	40.7	
C	27.5	30	32.5	35	37.5	40	42.5	

UNIT: MM		TYPE: HOUSING	MODEL NO: XH-nY	日期 DATE YR/MO/DAY		2008/06/20		页次1 OF 1 PAGE1 OF 1						
				未注公差 TOLERANCE		角度公差 ANGLES		比 例 SCALE		版 本 VERSION				
设计控制 DESIGNER BY		CHENGUANGQIAO	文件 编 号 DOCUMENT NUMBER		± 0.15		± 1.5°		FIT		1.0			
绘 制 DRAFTSMAN BY		吴人地												
审 核 CHECKED BY		叶文静											供 应 商 COME OUT WITH	
批 准 APPROVED BY		陈光桥											BOOMELE	

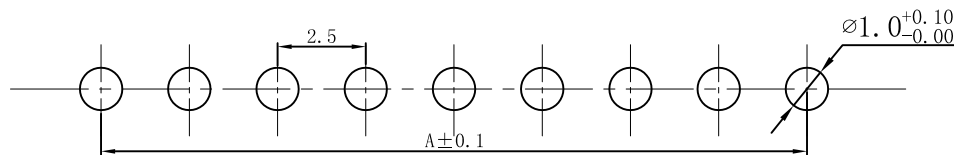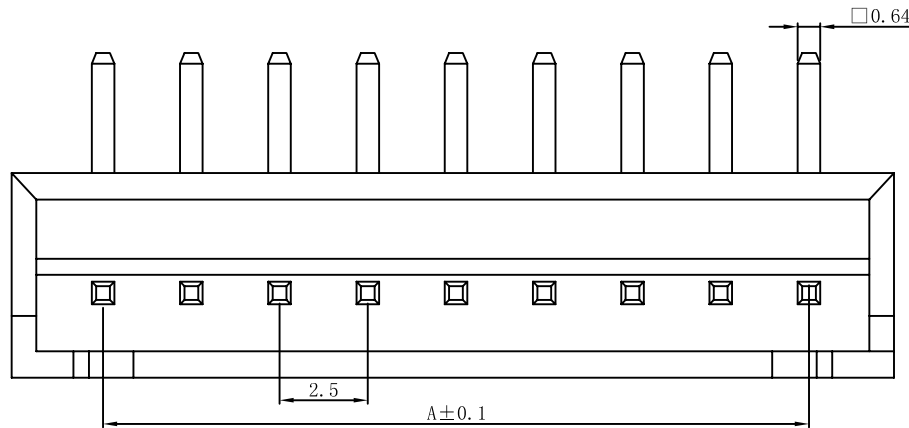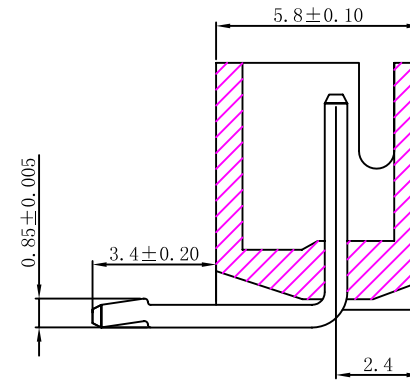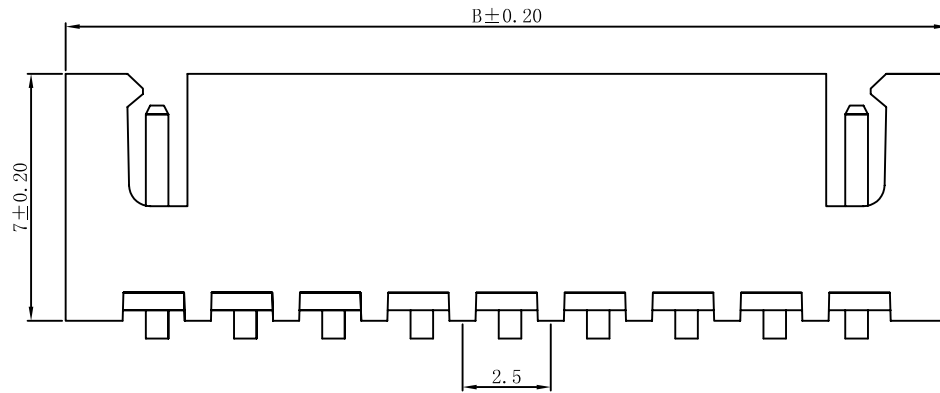

技术参数:
孔位: 2-16孔
间距: 2.5mm
适用线规: #22~#32
温度范围: -25° ~85C°
额定电压: 250V DC/AC
额定电流: 3A
接触电阻: ≤20mΩ
绝缘电阻: ≥1000MΩ
耐压: 1000V Ac/分钟

线路板安装尺寸

孔位	2	3	4	5	6	7	8	9
A	2.5	5.0	7.5	10.0	12.5	15.0	17.5	20.0
B	7.5	10	12.5	15	17.5	20	22.5	25
孔位	10	11	12	13	14	15	16	
A	22.5	25.0	27.5	30.0	32.5	35.0	37.5	
B	27.5	30	32.5	35	37.5	40	42.5	

UNIT: MM		TYPE: CONNECTOR	MODEL NO: XH-nAW	日期 DATE YR/MO/DAY	2008/06/20		页次1 OF 1 PAGE1 OF 1
				未注公差 TOLERANCE	角度公差 ANGLES	比 例 SCALE	版 本 VER
设计控制 DESIGNER BY	CHENGUANGQIAO	文 件 编 号 DOCUMENT NUMBER		± 0.20	± 1.5°	FIT	1.0
绘 制 DRAFTSMAN BY	吴人地						
审 核 CHECKED BY	叶文静	供 应 商 COME OUT WITH					
批 准 APPROVED BY	陈光桥	BOOMELE					