



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Specifications

Electrical

Voltage Rating: 100V(AC)

Current Rating: 2A

Contact Resistance: 20mΩ max.

Dielectric Withstandeing Voltage: 800V AC/1min.

Insulation Resistance: 1000mΩ min.

Material

Circuits: 2~16

Insulator: Nylon 66 UL 94V-0

Color: White or Natural

Contact: Brass 0.50mm(0.020") Square Pin

Plating: Tin or Gold Plated

Temperature Range: -25° C~+85° C

Applicable PC Board Thickness: 0.8 to 1.6mm

Poles	Dimension mm (in.)	
	A	B
2	2.0(0.079)	6.1(0.240)
3	4.0(0.157)	8.1(0.318)
4	6.0(0.236)	10.1(0.397)
5	8.0(0.315)	12.1(0.476)
6	10.0(0.394)	14.1(0.555)
7	12.0(0.472)	16.1(0.634)
8	14.0(0.551)	18.1(0.713)
9	16.0(0.630)	20.1(0.791)
10	18.0(0.709)	22.1(0.870)
11	20.0(0.787)	24.1(0.949)
12	22.0(0.886)	26.1(1.028)
13	24.0(0.945)	28.1(1.106)
14	26.0(1.024)	30.1(1.185)
15	28.0(1.102)	32.1(1.263)
16	30.0(1.181)	34.1(1.343)

RoHS
Compliant

Gold Star Connectors Co., Ltd.

APPD.
核准

DWG. HELEN

DATE 制表日
2008/9/30

SCALE
比例

UNIT
單位

PAGE
張數

TOLERANCE
容許公差

SIZE
線規尺寸





REV.
版次

PART NAME 品名

WAFER 2mm STRAIGHT (WHITE)

PART NO.

料號 NCW200S-xxS

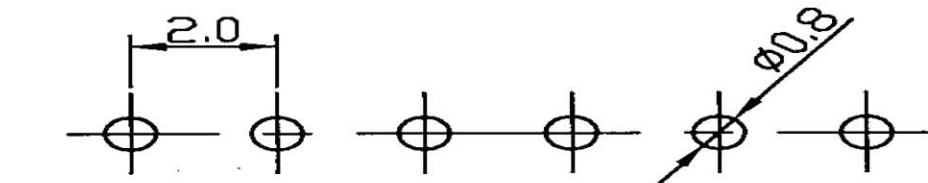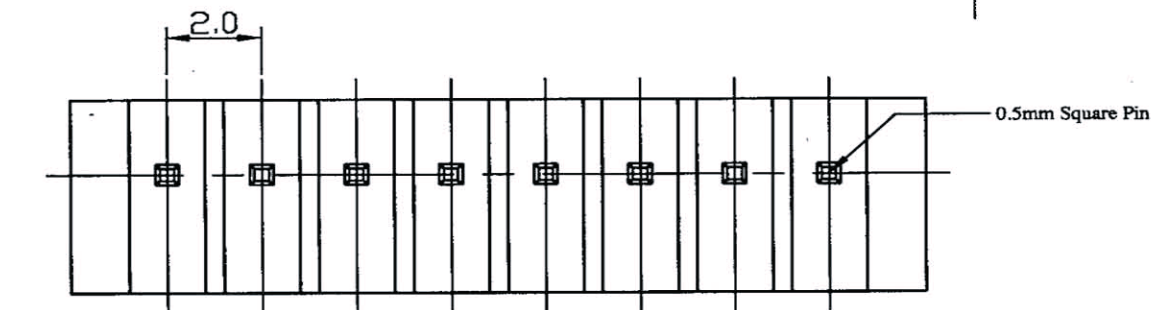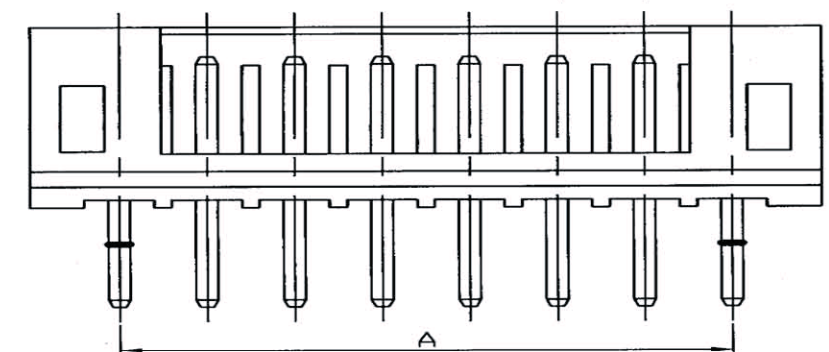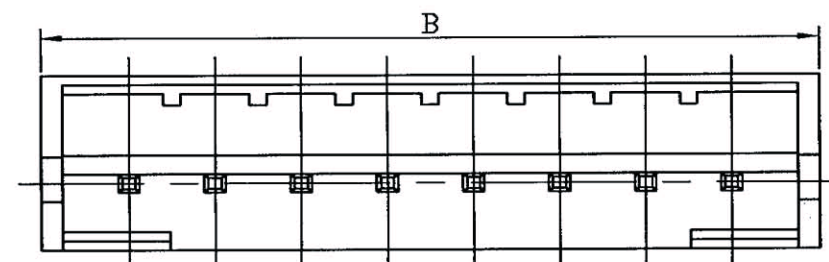

RECOMMENDED P.C. BOARD HOLE DIMM.

