


EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

A range of professional chassis mounting sockets, designed for panel mounting via two


flange fixing M3 screws. These sockets mate with all standard lockable plugs.

Dimensions

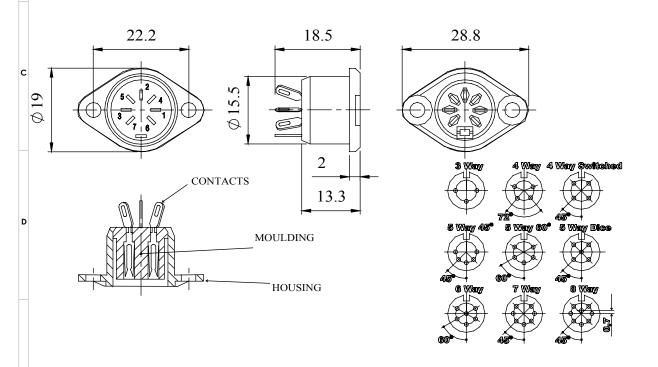

Materials			
Housing	Mazak		
	Black Chrome Plated		
Moulding	Lexan 500R		
Contacts	Brass Silver Flated		
Electrical			
Rated Voltage	34 V a.c. or d.c.		
Current Rating	2.A		
Test Voltage	500 V r.m.s.		
Insulation Resistance	103 MΩ min at 100 V d.c		
Contact Resistance	10 mΩ max		
Capacitance (mated)	3pF		
Climatic			
Climatic category	25/070/21		
Temperature Range	-25°C to +70°C		
Damp heat, steady state	21 days		

Туре	Deltron No	
3 Way	631-0300	
4 Way	631-0400	
4 Way switched	631-0410	
5 Way 45°	631-0500	
5 Way 60°	631-0510	
5 Way Dice	631-0520	
6 Way	631-0600	
7 Way	631-0700	
8 Way	631-0800	



APPROVED BY

RoHS 2002/95/EC

Compliant

Tel No. +44(0)1724 273200 Website www.dem-uk.com PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ALPHA 3 MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF

Harareaves Way Sawcliffe Ind Park

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETRES LINEAR TOLERANCE: NO DECIMAL PLACES ±0.5mm

1 DECIMAL PLACE ±0.25mm 2 DECIMAL PLACES ±0.125mm ANGULAR TOLERANCE: ±1°

FINISH PROFESSIONAL		DEBURR AND BREAK	DRAWN BY
DI.	FLANGED	SHARP EDGES	APPROVED
DL/	CK CHROME		THIRD ANGLE PROJ
IF IN DOUBT ASK			THIRD ANGLE I KO
DO NOT SCALE DRAWING			
MATERIAL	SEE NO	TF	

SHEET 1 OF 1 SCALE 1:1

A4

GENERAL SPECIFICATION 631 SERIES SOCKETS 07

631 SERIES

Release