





EN: This Datasheet/Document is presented by the manufacturer.



Please visit our website for pricing and availability at www.hestore.hu.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-710104~106	2007/01/12	Cloud	Change Nut BAB0040NI00 To BEA00010016.
C	LEN-920222~225	2009/02/06	Vicky	Update the drawing.


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

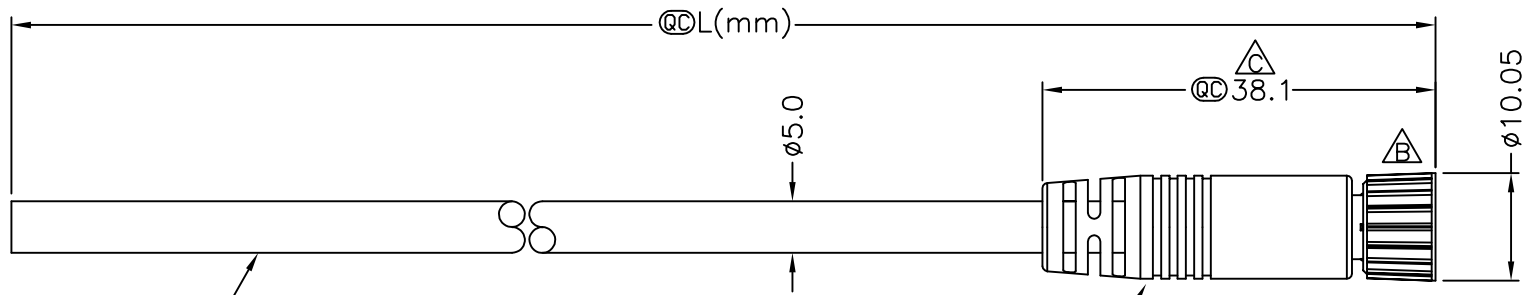

Conn.



8-04AFFM-SL7AXX
XX:01~99Meters
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters



Pin Assignments
Front View

4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕
Conn.	Wire Color	
Pin Out		

- Notes:
- * @ Important Dimension.
 - * Waterproof Rate:IP67.
 - * Connector:Black,PU.
 - * Female Pin:Copper Alloy,Gold Plated.
 - * Cable:UL2464 22AWG*4C+Talcum,Black, PVC Jacket,UV Resistant,OD=5.0mm.
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm	M8 Conn	
TOLERANCE	Cable Screw 4P F Conn F Pin	
±0.5 mm	SCALE Free	SHEET 1 OF 1
REV. C	SIZE A4	@ :Inspection Item

Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Vicky	DATE 2009/02/06
	DWG NO 8-04AFFM-SL7AXX	CHECKED BY Ivan	DATE 2009/02/06
	CUSTOMER ALTW	APPROVED BY Luke	DATE 2009/02/06