





EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

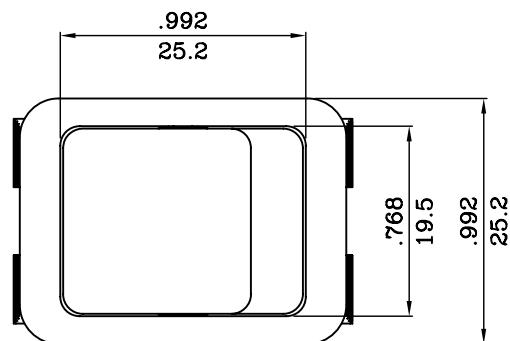

ROCKER SWITCH MODEL: R SERIES

RATING:(1) 16A 125VAC 1/4HP(UL/CSA)

(2) 16A 250VAC 1/4HP (UL/CSA)

(3) 20A 125VAC 3/4HP 250VAC (UL)

(4) 16(4)A 250V~T125 (1E4) (VDE/SEMKO/DEMKO)

(5) 10(2)A 250V~T125 (5E4) NEMKO/FIMKO/SEV/CQC




(6) 16(8)A 250V~T125(VDE/ENEC)

DIELECTRIC WITHSTAND VOLTAGE: 1000VAC 1 MIN


INSULATION RESISTANCE:100MΩ (MIN)

CONTACT RESISTANCE:20mΩ (MAX.)

ILLUMINATED:200~250VAC

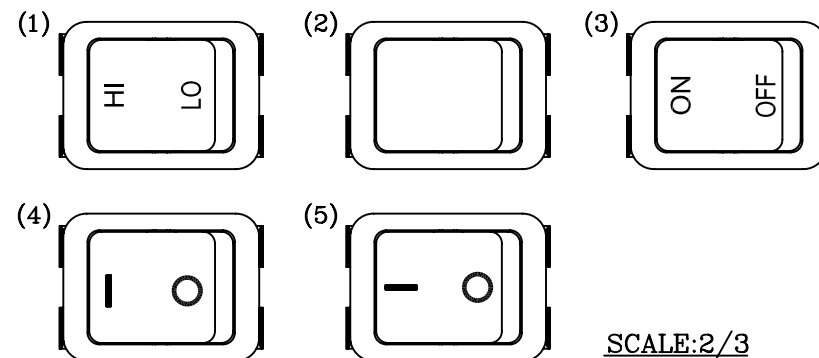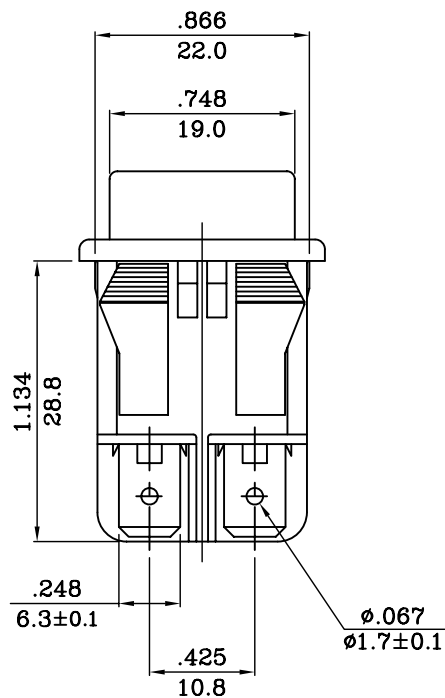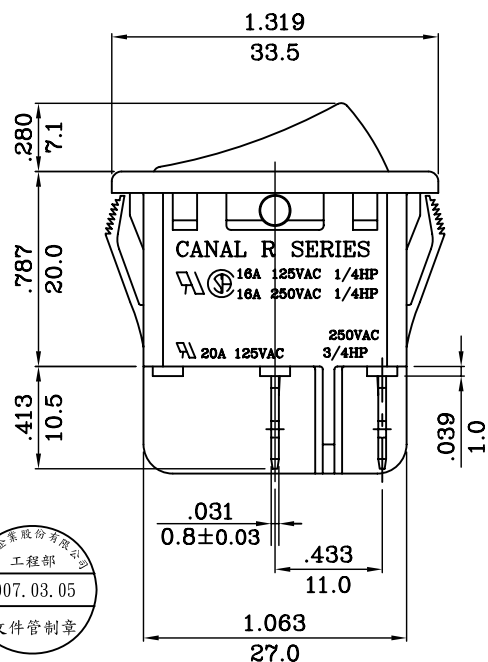

SCALE:2/3

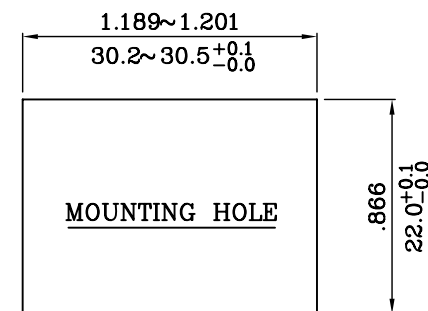

NOTE: 1. TOLERANCES UNLESS OTHERWISE SPECIFIED:±.012(in/mm)

2. IT IS IN COMPLIANCE WITH CANAL ROHS SPECIFICATION:WI-QA-24

REVISION	DESCRIPTION	REVISED BY	TOLERANCES .X .XX		ANGLE 1/2°	UNIT	mm	PART NAME	R SPEC DRAWING	DWG NO
△			DRAWN BY	楊紹才	DESIGNED BY	楊紹才	SCALE	5:4		
△			CHECKED BY	楊紹才	APPROVED BY	楊紹才	DATE	2007.01.29	PART NO	R210-1-C*G-***9
△	2007.01.29 新增規格, 首次出圖	楊紹才								S1729A

