








**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

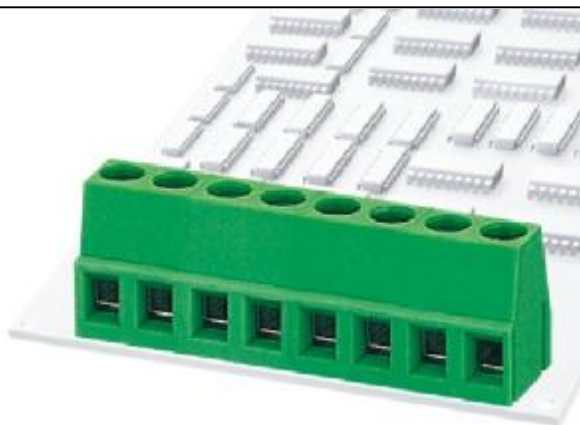

**DG128-5.0**

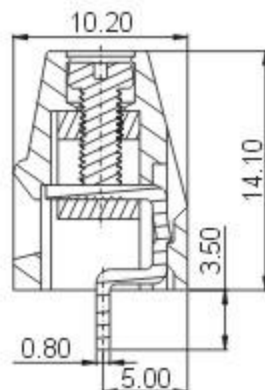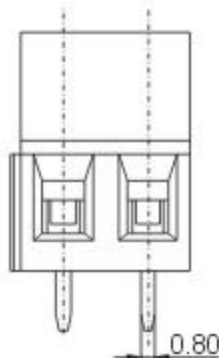

### APPROVAL

#### Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

300V

15A

24-12AWG

AC2000V/1Min

IEC

250V

18A

2.5mm<sup>2</sup>

### Menchanical

Torque

Ambient temperature

Strip length

### Dimensions

pitch

Poles

0.4Nm(3.5Lb-In)

-40℃~+105℃

7mm

5.0mm(.197")

2P,3P-24P

### Material

Housing

Screws

Pin header

Cage

PA66,UL94V-0

M2.5,Steel, Cr<sup>3+</sup>Znplated

Brass,Tin-plated

Brass,Ni-plated

### HOW TO ORDER :

|  |   |  |  |   |   |   |  |   |                  |   |   |
|--|---|--|--|---|---|---|--|---|------------------|---|---|
|  | - |  |  | P | - | 1 |  | - | X                | X | X |
|  |   |  |  |   |   |   |  |   | Customer Request |   |   |



Series number

No.of pole

|   |              |
|---|--------------|
| 1 | Single pitch |
| 2 | Double pitch |

### Color

|   |       |   |        |   |              |
|---|-------|---|--------|---|--------------|
| 1 | Grey  | 4 | Green  | 7 | Trans Parent |
| 2 | Blue  | 5 | Orange | 8 | Yellow       |
| 3 | Black | 6 | Red    | 9 | White        |



DEGSON ELECTRONICS CO., LTD.

NAME

**DG128-5.0**