




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

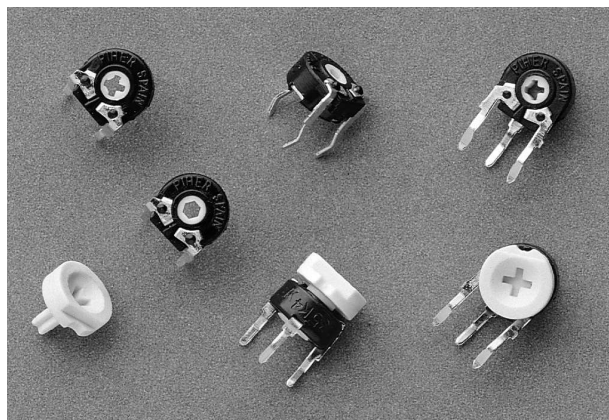

PT-6 6 mm Carbon Potentiometer

FEATURES

- Carbon resistive element.
- Dust proof enclosure.
- Polyester substrate.
- Also upon request:
 - Wiper positioned at 50% or fully clockwise
 - Supplied in magazines for automatic insertion
 - Long life model PT-6...E (10,000 cycles)
 - Without crimping model PT-6...SC
 - Housing available in self extinguishable plastic (VL94V0)

MECHANICAL SPECIFICATIONS

- Mechanical Rotation angle: $235^\circ \pm 5^\circ$
- Electrical Rotation angle: $200^\circ \pm 20^\circ$
- Torque: 0.2 to 2 Ncm.
(0.3 to 2.7 in-oz)
- Stop torque: > 4 Ncm. (> 5.6 in-oz)


ELECTRICAL SPECIFICATIONS

- Range of values (*): $220\Omega \leq R_n \leq 5M$ (Decad. 1.0 - 2.0 - 2.2 - 2.5 - 4.7 - 5.0)
- Tolerance (*): $220\Omega \leq R_n \leq 1M\Omega$ $\pm 20\%$
 $1M\Omega < R_n \leq 5M\Omega$ $\pm 30\%$
- Max. Voltage: 100 VDC (lin), 50 VDC (no lin)
- Nominal Power 50°C (122°F) (see power rating curve)
0.1 W (lin) 0.05 W (no lin)
- Taper (*) (Log & Alog. only $R_n > 1K$)
Lin; Log; Alog.
- Residual resistance: $\leq 5 \cdot 10^{-3} R_n$ (2Ω min)
- Equivalent Noise Resistance: $\leq 3\% R_n$ (3Ω min)
- Operating Temperature **: -25°C +70°C (-13°F +158°F)

(*) Others upon request.

** Up to 85°C depending on application

HOW TO ORDER

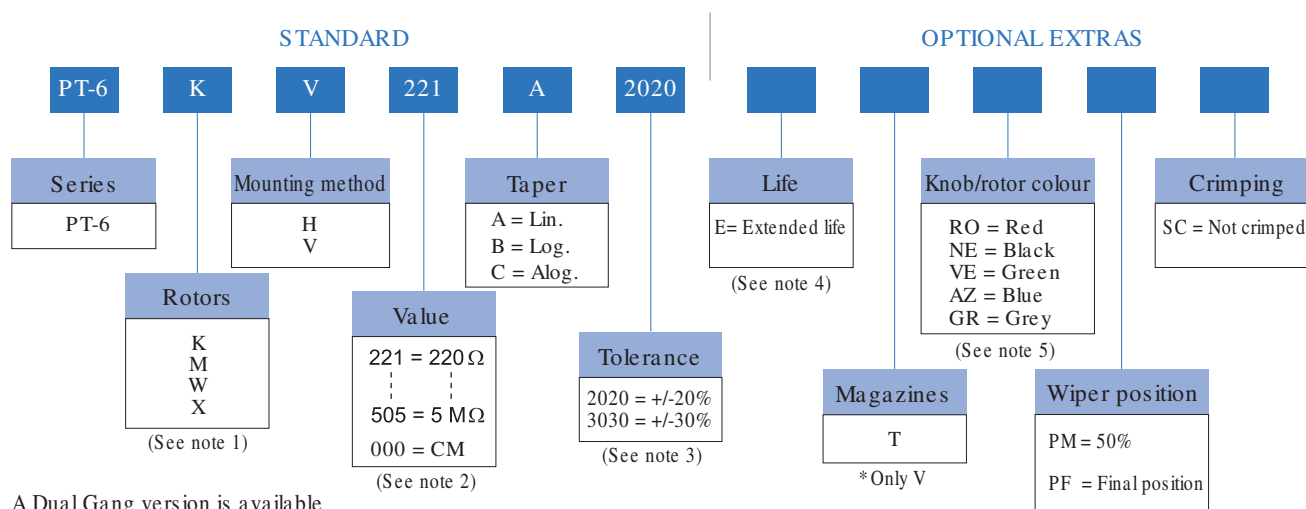

A Dual Gang version is available
(see Low Torque Ganged Trimmer data sheet).

NOTES:

- (1) Adjust. type: «X» is only available with horizontal adjusting method.
- (2) Value: – Code: $\frac{22}{1} = 220\Omega$
 – 000 = CM = Switch (see diagram)
 Number of zeros
 First two digits.
- (3) Tolerance (non standard): Upon request: Code e.g.: $\frac{+7}{-5} = \frac{07}{05}$
 Negative tolerance
 Positive tolerance
- (4) Life: • Normal = 500 cycles • Long = 10,000 cycles
- (5) Potentiometer without knob, only the rotor. Potentiometer with knob, only the knob.

NOTE: The information contained here in may be changed without prior notice.

HOW TO ORDER CUSTOM DRAWING


STANDARD OPTIONS

PT-6 KV + DRAWING NUMBER (Max. 16 characters)

This way of ordering should be used for options which are not included in the "How to order" standard and optional extras.

Mechanical life	500 cycles
Packing	Bulk
Rotor colour	White
Wiper position	Initial
Crimping	With crimping

ROTORS

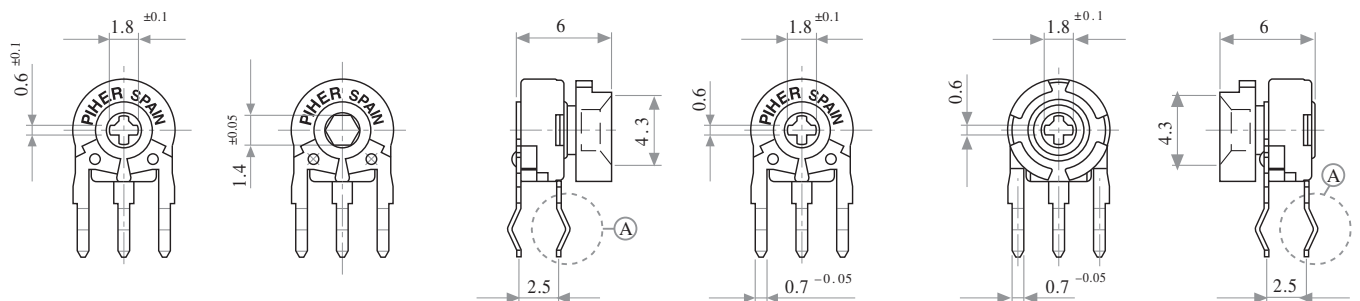

K= Cross slot thru hole M= Hexagonal thru hole



M= Hexagonal thru hole

X = Adjustable from collector side


W= Adjustable from terminal side

MOUNTING METHODS. VARIATIONS




V = Horizontal mount / Vertical adjust

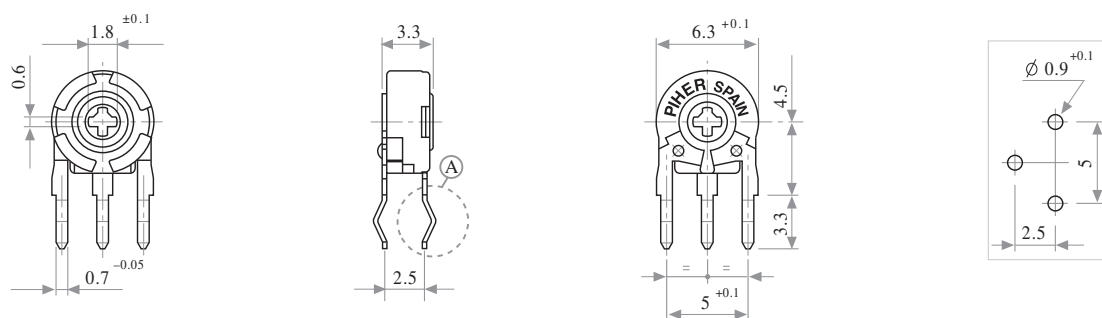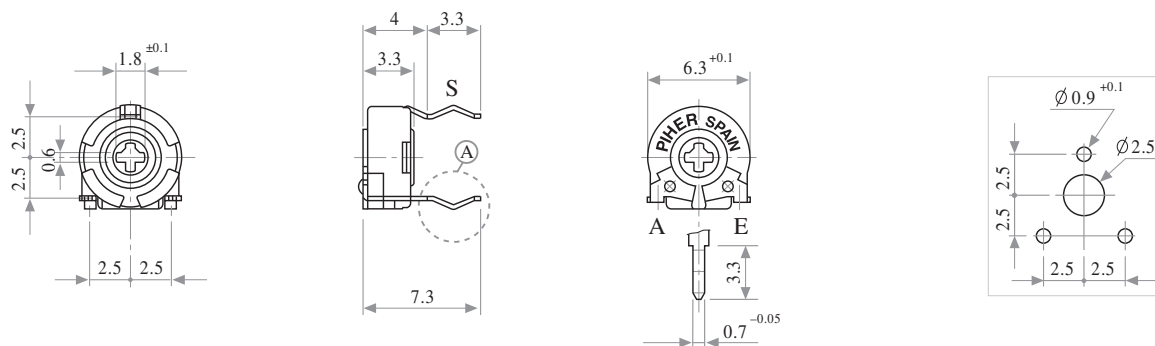

DETAIL



OPTIONS




BOXES

Model	Units
All	1.000


AUTOMATIC INSERTION

Magazines	Units per magazine
PT-6 V & PT-6 WV	80 Pieces

Magazines for PT-6 V with or without crimp.

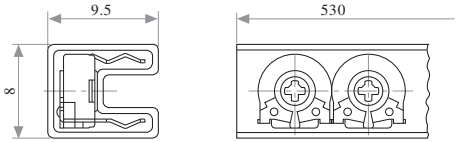


Magazines for PT-6 WV with or without crimp.

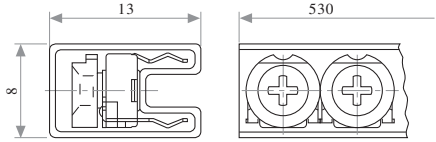


SHAFT

Ref.: 6132

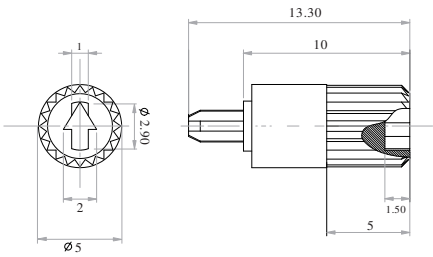

Please order Shaft Separately

PT-6 DUAL GANG VERSION

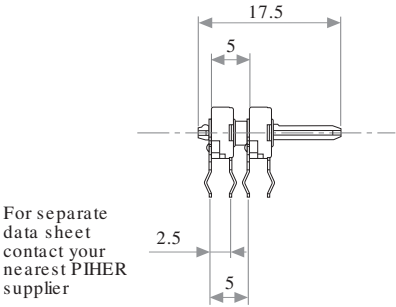


TESTS

TYPICAL VARIATIONS

POWER RATING CURVE

ELECTRICAL LIFE	1.000 h. @ 50°C: 0.1 W	±5 %
MECHANICAL LIFE (CYCLES)	200 @ 10 CPM ...15 CPM	±3 % (Rn < 1 MΩ)
TEMPERATURE COEFFICIENT	-25°C; +70°C	±300 ppm (Rn < 100 K)
THERMAL CYCLING	16 h. @ 85°C; 2h. @ -25°C	±2.5 %
DAMP HEAT	500 h. @ 40°C @ 95% HR	±5 %
VIBRATION (for each plane X,Y,Z)	2 h. @ 10 Hz. ... 55 Hz.	±2 %



NOTE: Out of range values may not comply with these results.