




**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

## PNP SILICON PLANAR SWITCHING TRANSISTORS

**2N2906A**  
**2N2907A**  
**TO-18**



### Switching And Linear Application DC to VHF Amplifier Applications

#### ABSOLUTE MAXIMUM RATINGS

| DESCRIPTION                                      | SYMBOL   | 2N2906A, 07A | UNIT     |
|--------------------------------------------------|----------|--------------|----------|
| Collector -Emitter Voltage                       | VCEO     | 60           | V        |
| Collector -Base Voltage                          | VCBO     | 60           | V        |
| Emitter -Base Voltage                            | VEBO     | 5.0          | V        |
| Collector Current Continuous                     | IC       | 600          | mA       |
| Power Dissipation @Ta=25 degC                    | PD       | 400          | mW       |
| Derate Above 25deg C                             |          | 2.28         | mW/deg C |
| @ Tc=25 degC                                     | PD       | 1.8          | W        |
| Derate Above 25deg C                             |          | 10.3         | mW/deg C |
| Operating And Storage Junction Temperature Range | Tj, Tstg |              | deg C    |

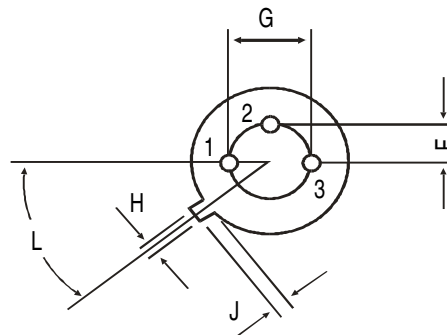
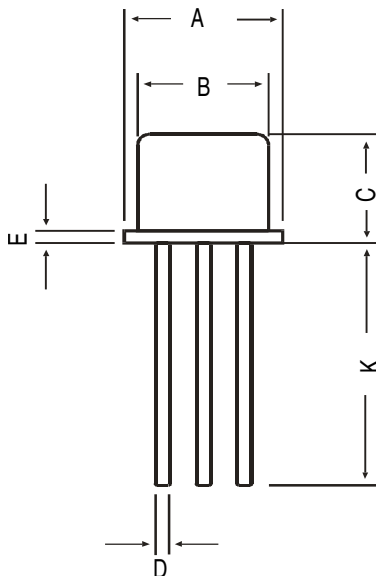
#### ELECTRICAL CHARACTERISTICS (Ta=25 deg C Unless Otherwise Specified)

| DESCRIPTION                          | SYMBOL     | TEST CONDITION     | VALUE          |                | UNIT |
|--------------------------------------|------------|--------------------|----------------|----------------|------|
|                                      |            |                    | MIN            | MAX            |      |
| Collector -Emitter Voltage           | VCEO*      | IC=10mA, IB=0      | 60             | -              | V    |
| Collector -Base Voltage              | VCBO       | IC=10uA, IE=0      | 60             | -              | V    |
| Emitter-Base Voltage                 | VEBO       | IE=10uA, IC=0      | 5.0            | -              | V    |
| Collector-Cut off Current            | ICBO       | VCB=50V, IE=0      | -              | 10             | nA   |
| Base Current                         | ICEX       | Ta=150 deg C       |                |                |      |
|                                      |            | VCB=50V, IE=0      | -              | 10             | uA   |
|                                      |            | VCE=30V, VBE=0.5V  | -              | 50             | nA   |
|                                      |            | VCE=30V, VBE=0.5V  | -              | 50             | nA   |
| Collector Emitter Saturation Voltage | VCE(Sat)*  | IC=150mA, IB=15mA  | -              | 0.4            | V    |
|                                      |            | IC=500mA, IB=50mA  |                | 1.6            | V    |
| Base Emitter Saturation Voltage      | VBE(Sat) * | IC=150mA, IB=15mA  | -              | 1.3            | V    |
|                                      |            | IC=500mA, IB=50mA  | -              | 2.6            | V    |
|                                      |            |                    | <b>2N2906A</b> | <b>2N2907A</b> |      |
| DC Current Gain                      | hFE        | IC=0.1mA, VCE=10V  | >40            | >75            |      |
|                                      |            | IC=1mA, VCE=10V    | >40            | >100           |      |
|                                      |            | IC=10mA, VCE=10V   | >40            | >100           |      |
|                                      |            | IC=150mA, VCE=10V* | 40-120         | 100-300        |      |
|                                      |            | IC=500mA, VCE=10V* | >40            | >50            |      |

**ELECTRICAL CHARACTERISTICS (Ta=25 deg C Unless Otherwise Specified)****2N2906A-07A**


| DESCRIPTION                           | SYMBOL | TEST CONDITION             | MIN | MAX | UNIT |
|---------------------------------------|--------|----------------------------|-----|-----|------|
| <b><u>DYNAMIC CHARACTERISTICS</u></b> |        |                            |     |     |      |
| Transition Frequency                  | ft **  | IC=50mA, VCE=20V, f=100MHz | 200 | -   | MHz  |
| Out-Put Capacitance                   | Cob    | VCB=10V, IE=0, f=100kHz    | -   | 8.0 | pF   |
| Input Capacitance                     | Cib    | VBE=2V, IC=0, f=100kHz     | -   | 30  | pF   |
| <b><u>Switching Time</u></b>          |        |                            |     |     |      |
| Delay time                            | td     | IC=150mA, IB1=15mA         | -   | 10  | ns   |
| Rise time                             | tr     | VCC=30V                    | -   | 40  | ns   |
| Turn-On Time                          | ton    |                            |     | 45  | ns   |
| Storage time                          | ts     | IC=150mA, IB1=IB2=15mA     | -   | 80  | ns   |
| Fall time                             | tf     | VCC=6V                     | -   | 30  | ns   |
| Turn-Off Time                         | toff   |                            | -   | 100 | ns   |

\*Pulse Test :-Pulse Width=300us, Duty Cycle=2%

\*\*ft is defined as the frequency at which  $h_{fe}$  extrapolates to unity**TO-18 Metal Can Package**

All dimensions in mm.

| DIM | MIN    | MAX  |
|-----|--------|------|
| A   | 5.24   | 5.84 |
| B   | 4.52   | 4.97 |
| C   | 4.31   | 5.33 |
| D   | 0.40   | 0.53 |
| E   | —      | 0.76 |
| F   | —      | 1.27 |
| G   | —      | 2.97 |
| H   | 0.91   | 1.17 |
| J   | 0.71   | 1.21 |
| K   | 12.70  | —    |
| L   | 45 DEG |      |

**PIN CONFIGURATION**

1. EMITTER
2. BASE
3. COLLECTOR

**Packing Detail**

| PACKAGE | STANDARD PACK |                | INNER CARTON BOX |      | OUTER CARTON BOX  |       |        |
|---------|---------------|----------------|------------------|------|-------------------|-------|--------|
|         | Details       | Net Weight/Qty | Size             | Qty  | Size              | Qty   | Gr Wt  |
| TO-18   | 1K/polybag    | 350 gm/1K pcs  | 3" x 7.5" x 7.5" | 5.0K | 17" x 15" x 13.5" | 80.0K | 34 kgs |

## Notes

### Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished on the CDIL Web Site/CD is believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of

**Continental Device India Limited**

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 5141 1112 Fax + 91-11-2579 5290, 5141 1119

email@cdil.com www.cdilsemi.com