



**EN:** This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

# ENERGIZER E96

**AAAA**



## Industry Standard Dimensions

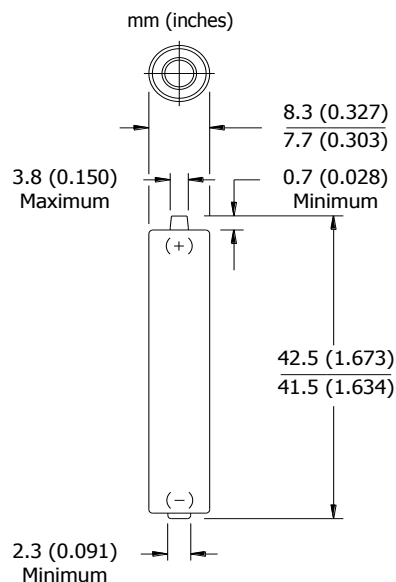


## Specifications

|                         |                                                                              |
|-------------------------|------------------------------------------------------------------------------|
| <b>Classification:</b>  | Alkaline                                                                     |
| <b>Chemical System:</b> | Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> )<br>No added mercury or cadmium |
| <b>Designation:</b>     | ANSI-25A, IEC-LR8D425, LR61                                                  |
| <b>Nominal Voltage:</b> | 1.5 volts                                                                    |
| <b>Nominal IR:</b>      | 150 to 300 milliohms (fresh)                                                 |
| <b>Operating Temp:</b>  | -18°C to 55°C (0°F to 130°F)                                                 |
| <b>Typical Weight:</b>  | 6.5 grams (0.2 oz.)                                                          |
| <b>Typical Volume:</b>  | 2.2 cubic centimeters (0.1 cubic inch)                                       |
| <b>Jacket:</b>          | Plastic Label                                                                |
| <b>Shelf Life:</b>      | 5 years at 21°C                                                              |
| <b>Terminal:</b>        | Flat Contact                                                                 |

## Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

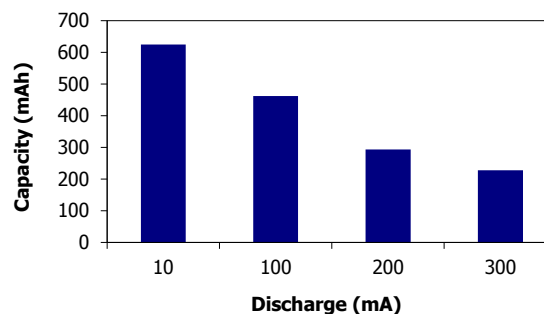

## Device Selection Guide:

## Battery Selection Indicator

Tape Player



Lighting



Laser pointer



**High Drain  
Devices**

**Moderate Drain  
Devices**

**Low Drain  
Devices**

## Important Notice


This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

# ENERGIZER E96

**AAAA**


## Constant Resistance Performance

Typical Characteristics (21°C)

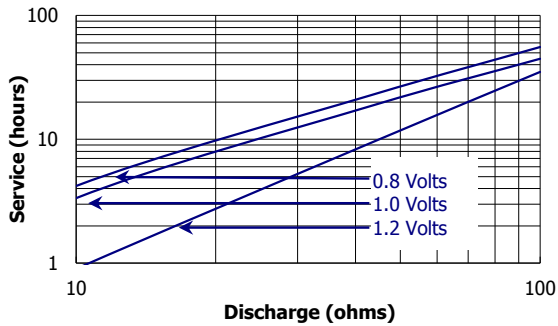


## Constant Current Performance

Typical Characteristics (21°C)

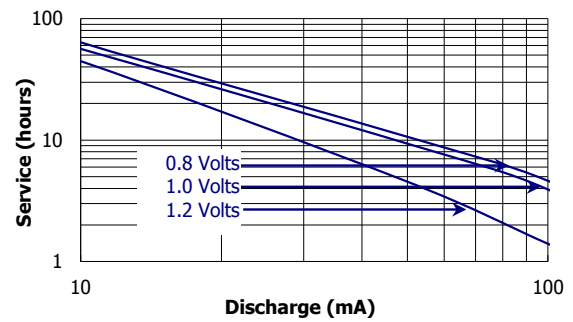


## Constant Power Performance

Typical Characteristics (21°C)

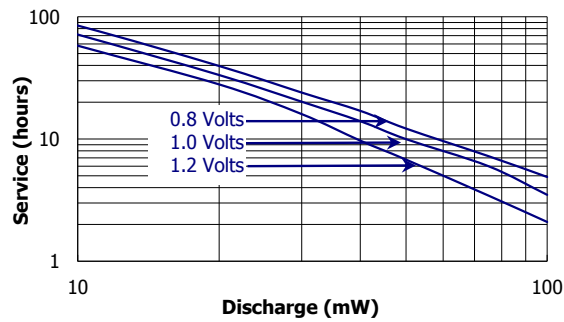


## Industry Standard Tests (21°C)

**LASER POINTER**  
75 ohm 1 hr/day

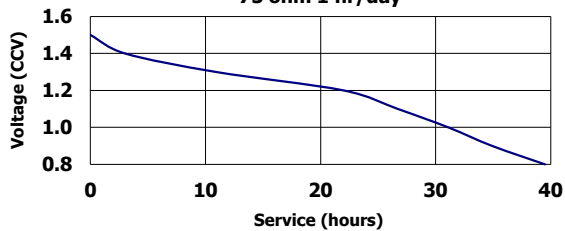

**LIGHTING**  
3.9 ohm LIF

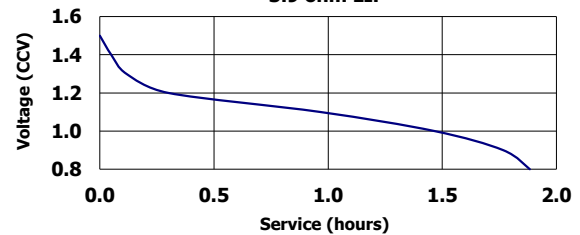

### Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.