



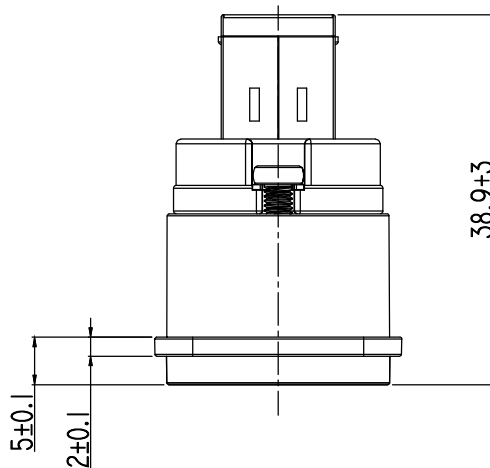




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

RoHS COMPLIANT

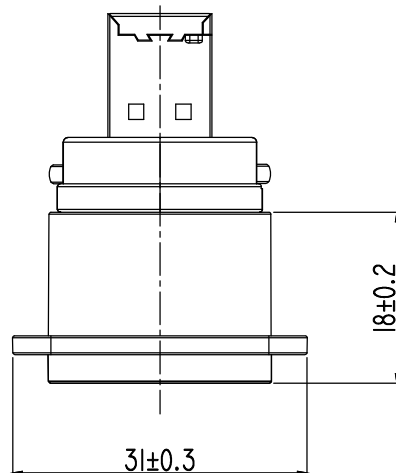

Panel cut out (Rear side)

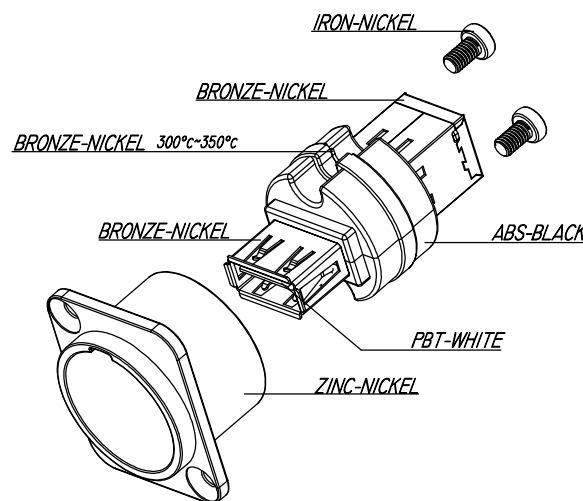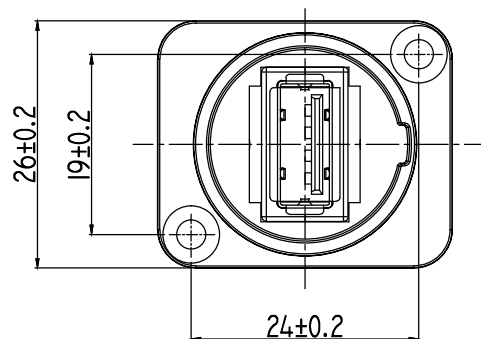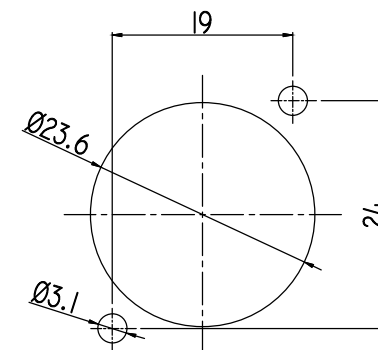


USB 2.0 Specification & Technical Data:


Contact Resistance: 30 mΩ MAX
 Insulation Resistance: 1000 MΩ min
 Dielectric withstanding voltage: 500V AC one minut
 Rated Current 1.5 A
 Rated Voltage 500V
 Temperature Range 0°C-50°C
 (High-Speed): 25Mbps ~ 480Mbps (Max 480Mbps)
 (Full Speed): 500Kbps ~ 10Mbps (Max 12Mbps)
 (Low Speed): 10Kbps ~ 100Kbps (Max 1.5Mbps)

Material:

Insulation : PBT
 Contact: Brass
 Shell: Brass
 Plating:
 Contact: Touch Area Golden Plating 1u"
 Soldering Area Tin Plating 40u" min
 Shell: Whole Area Nickel Plating 40u" min



Contact	Standard A	Standard B
1	VBUS (4.75 - 5.25 V)	VBUS (4.4 - 5.25 V)
2	D-	D-
3	D+	D+
4	Earthing	Earthing

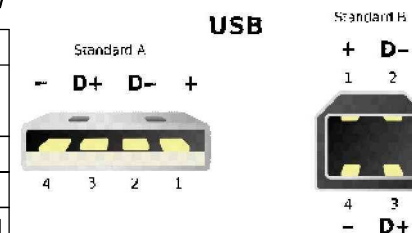

Cliff Electronic Components Ltd.

76 Holmethorpe Avenue, Holmethorpe Industrial Estate,
 Redhill, Surrey, RH1 2PF, England, UK
 Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

PART No. CP30110

XLR

**USB A FEMALE TO
 USB B FEMALE**