



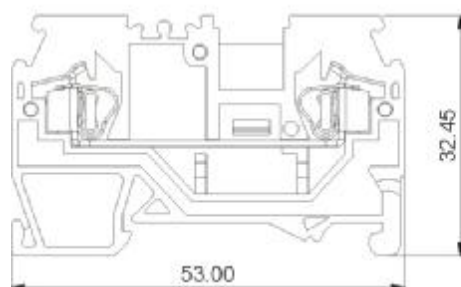

EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

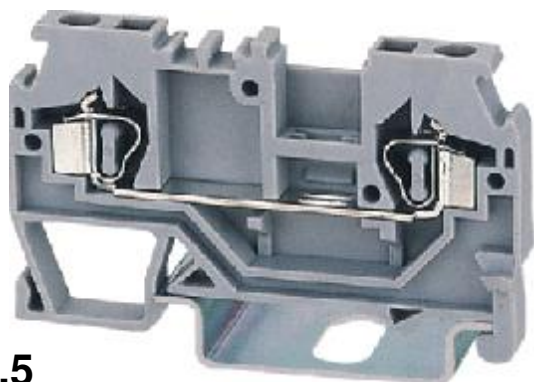

Approval

Electrical

Standard	UL
Rated voltage	600V
Rated current	15A
Wire size	28-14AWG
T/W/End plate	5/53/2.5mm
Height(NS35:7.5/NS35:15)	35.5/43mm
Rated surge voltage/contamination class	8KV/3
Stripping length	10mm
Insulating material/Inflammability class	PA/V-0



UL

IEC

Rated voltage	600V	800V
Rated current	15A	24A
Wire size	28-14AWG	0.2-2.5mm ²
T/W/End plate	5/53/2.5mm	
Height(NS35:7.5/NS35:15)	35.5/43mm	
Rated surge voltage/contamination class	8KV/3	
Stripping length	10mm	
Insulating material/Inflammability class	PA/V-0	

Specification

(1) Terminal block	WS 2.5
(2) Cover	D-WS 2.5
(3) Adjacent jumper	WFA-2.5
(4) Alternate jumper	WFB-2.5
(5) Staggered jumper	1-2 1-5 1-3 1-6 1-4 1-8
(6) Insulation stop	AAAAA
(8) Test plug adapter	SSA
(9) Test plug	SSB
(9) Zack strip	DEK5

Model

Pieces

WS 2.5	100
D-WS 2.5	100
WFA-2.5	200
WFB-2.5	100
1-2WFC-2.5/2 1-5WFC-2.5/5	100 50
1-3WFC-2.5/3 1-6WFC-2.5/6	100 50
1-4WFC-2.5/4 1-8WFC-2.5/8	100 50
TTA-2.5	200
EEA-2.5	100
SSA	100
SSB	50
DEK5	


HOW TO ORDER :

- **P** - -

X	X	X
Customer Request		

Series No. **No. of pole** **Color**

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white



DEGSON ELECTRONICS CO., LTD.

NAME

WS 2.5