




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

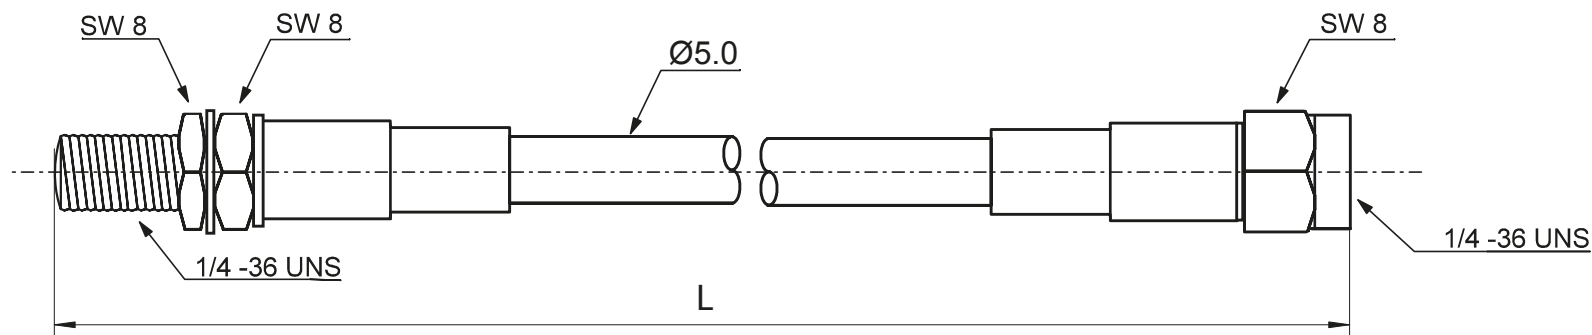

Nr. / No.	Länge / Length (m)
51675	1.0
51679	10.0
51676	2.0
51677	3.0
51678	5.0

- WLAN Antennenverlängerungskabel
 - RP-SMA Stecker > RP-SMA Buchse
 - RG 58 LowLoss Koaxialkabel
 - vergoldete SMA Reverse Steckverbinder
 - Schirmung: doppelt
 - Al-Folie + Geflecht 112*0.1mm Cu
 - Innenleiter: Ø0.8mm Cu
 - Dielektrikum: PE Ø2.85mm
 - RoHS-konform
- WLAN antenna extension cable
 - RP-SMA plug > RP-SMA jack
 - RG 58 LowLoss coaxial cable
 - gold plated SMA Reverse connectors
 - Shielding: double
 - Al Foil + Braiding 112*0.1mm Cu
 - Inner conductor: Ø0.8mm Cu
 - Dielectric: PE Ø2.85mm
 - RoHS-compliant

Änderungen

Datum	Name	gez.:	Datum	Name
		gef.:	27.01.2014	tf
		gepr.:	27.01.2014	tf
		Norm:		
		Änderungen vorbehalten / Subject to change		

Bezeichnung

RP-SMA FM

Zeichnungs-Nr.:

Blatt

goobay®

von