



**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

### Heavy-duty Miniature Relay

- Incorporates environment-friendly, cadmium-free contacts.
- Variety of contact forms: SPDT or SPST-NO (continuous current rating: 8 A)
- Mechanical and electrical characteristics comply with VDE0435.
- Satisfies VDE0700 requirements with a dielectric strength of 4 kV at a distance of 8 mm.
- Satisfies C/250 insulation requirements of VDE0110.
- Conforms to class II, part 1 of VDE0106.



### Ordering Information

Classification	Structure	Contact material	Contact form	
			SPST-NO	SPDT
Standard	Plastic-sealed	AgNi + gold plating (0.35 μ)	G6RN-1A	G6RN-1
		AgNi	G6RN-1A-ANI	G6RN-1-ANI
		AgCdO + gold plating (0.35 μ)	G6RN-1A-ACD	G6RN-1-ACD
		AgCdO	G6RN-1A-CDM	G6RN-1-CDM

**Note:** When ordering, add the rated coil voltage to the model number.

Example: G6RN-1A 24 VDC

Rated coil voltage

### Model Number Legend:

G6RN-□□□□□-□  
1 2 3 4 5 6

#### 1. Number of Poles

1: 1 pole

#### 2. Contact Form

None: SPDT

A: SPST-NO

#### 3. Contact Type

None: Single contact

#### 4. Enclosure Ratings

None: Plastic-sealed

#### 5. Terminals

None: Standard PCB

#### 6. Contact Material

None: AgNi + gold plating

ANI: AgNi

ACD: AgCdO + gold plating

CDM: AgCdO

### Specifications

#### ■ Coil Ratings

Rated voltage	5 VDC	6 VDC	12 VDC	18 VDC	24 VDC	36 VDC	48 VDC
Rated current	44 mA	36.7 mA	18.3 mA	12.2 mA	9.2 mA	6.4 mA	5.2 mA
Coil resistance	114 Ω	164 Ω	655 Ω	1,470 Ω	2,620 Ω	5,630 Ω	9,210 Ω
Must operate voltage	70% max. of rated voltage						
Must release voltage	10% min. of rated voltage						
Max. voltage	110% of rated voltage at max. temperature (85°C)						
Power consumption	Approx. 220 mW						Approx. 250 mW

- Note:** 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.  
 2. Operating characteristics are measured at a coil temperature of 23°C.

## ■ Contact Ratings

<b>Load</b>	Resistance load ( $\cos \phi = 1$ )
<b>Rated load</b>	8 A at 250 VAC; 5 A at 30 VDC
<b>Rated carry current</b>	8 A
<b>Max. switching voltage</b>	250 VAC; 30 VDC, (400 VAC) (see note)
<b>Max. switching current</b>	AC 8 A; DC 5 A
<b>Max. switching capacity</b>	2,000 VA; 150 W
<b>Min. permissible load</b>	5 VDC 10 mA (for gold plating 0.35 $\mu$ min.)

**Note:** Electrical life expectancy is reduced.

## ■ Characteristics

<b>Operate time</b>	15 ms max.
<b>Release time</b>	5 ms max.
<b>Max. operating frequency</b>	Mechanical: 36,000 operations/hr Electrical: 360 operations/hr (under rated load)
<b>Insulation resistance</b>	1,000 M $\Omega$ min.
<b>Dielectric strength</b>	4,000 VAC between coil and contacts 1,000 VAC between contacts
<b>Creepage/clearance</b>	8 mm min. between coil and contacts
<b>Vibration resistance</b>	Malfunction: NO: 10 to 55 Hz, 1.5-mm double amplitude NC: 10 to 55 Hz, 0.8-mm double amplitude
<b>Shock resistance</b>	Destruction: 1,000 m/s <sup>2</sup> (approx. 100G) Malfunction: 100 m/s <sup>2</sup> (approx. 10G)
<b>Life expectancy</b>	Mechanical: 10,000,000 operations min. Electrical: Approx. 100,000 operations (see note)
<b>Ambient temperature</b>	Operating: -40°C to 85°C Storage: -40°C to 85°C
<b>Ambient humidity</b>	Operating: 35% to 85%
<b>Weight</b>	Approx. 9 g
<b>Protection class</b>	II according to VDE0106 Part 1
<b>Insulation class</b>	C/250, B/380 according to VDE0110

**Note:** Resistive load test at 250 VAC, 8 A, room temperature with diode.  
 Continuous monitoring must be performed to detect contact sticking and short circuit.  
 Dielectric strength measured at 500 V for 1 minute with the same polarity.

## ■ Approved Standards

**IEC255 (Includes Reinforced Insulation and Spacing Requirements According to IEC65, 335-1, 950, EN60335-1, 60950)**

Standard	Contact form	Coil ratings	Contact ratings	Conditions
IEC255-1-00 IEC255-0-20	SPDT SPST-NO	5, 6, 12, 18, 24, 36, 48 VDC	8 A at 250 VAC ( $\cos \phi = 1$ ) (see note)	Pollution degree: 3 Overvoltage category: II Operating range: class 1 Pick-up class: class C Ambient temperature: -40°C to 85°C

**Note:** VAC according to IEC417.

## VDE

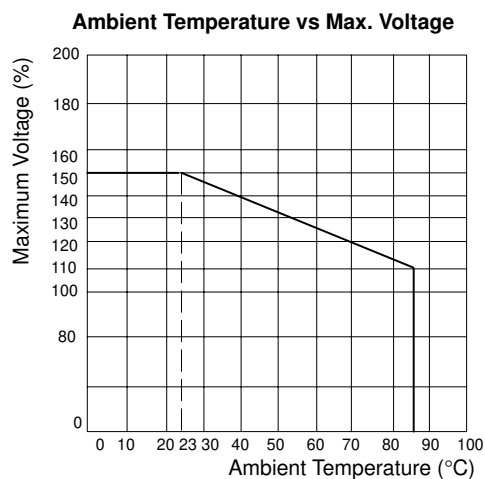
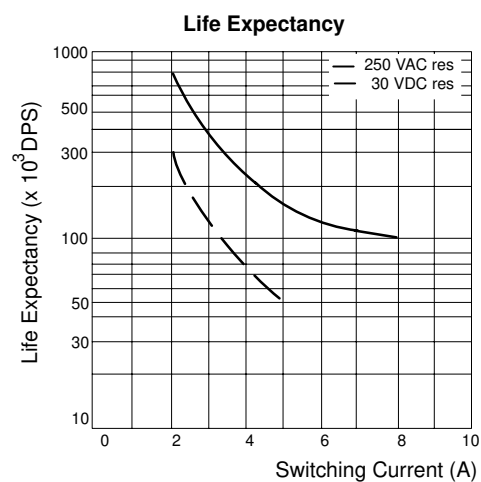
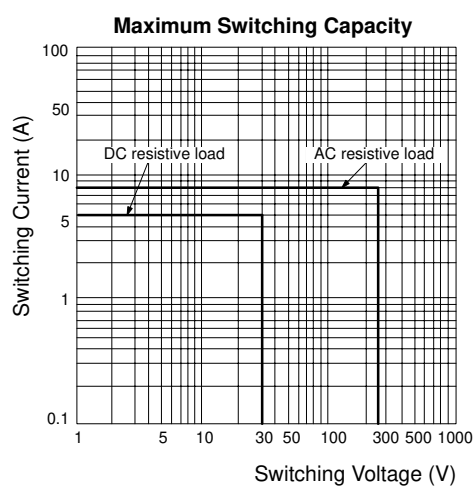
Standard	Contact form	Coil ratings	Contact ratings	Conditions
VDE0435 Part201 VDE0435 Part120	SPDT SPST-NO	5, 6, 12, 18, 24, 36, 48 VDC	8 A at 250 VAC ( $\cos \phi = 1$ )	Insulation group according to VDE0110 C/250, B/380 Operating range: class 1 Pick-up class: class C Ambient temperature: -40°C to 85°C

**UL508 (File No. E41515)**

Coil rating	Contact rating
5 to 48 VDC	10 A at 250 VAC (resistive) 5 A at 30 VDC (resistive) 8 A at 250 VAC (resistive) (ambient temperature: 85°C)

**CSA C22.2 (File No. LR31928-543)**


Coil rating	Contact rating
5 to 48 VDC	10 A at 250 VAC (resistive) 5 A at 30 VDC (resistive) 8 A at 250 VAC (resistive) (ambient temperature: 85°C)

**Engineering Data**


# Dimensions

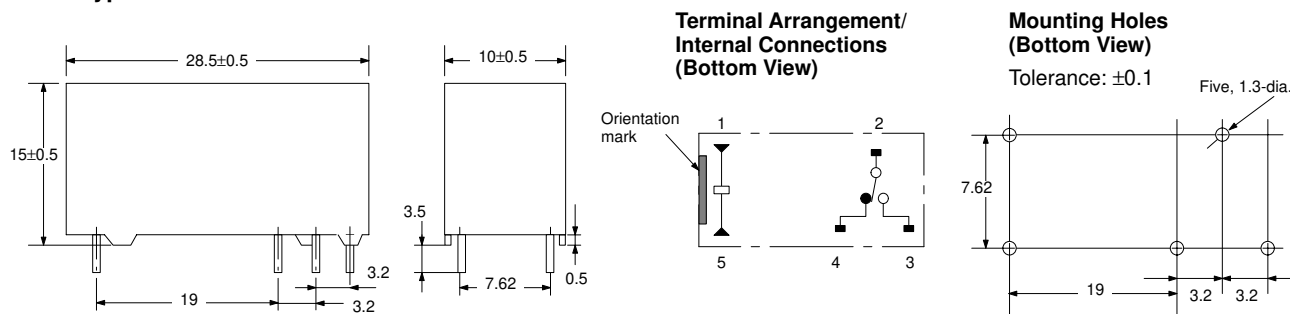**Note:** All units are in millimeters unless otherwise indicated.

## SPDT Type



## SPST-NO Type

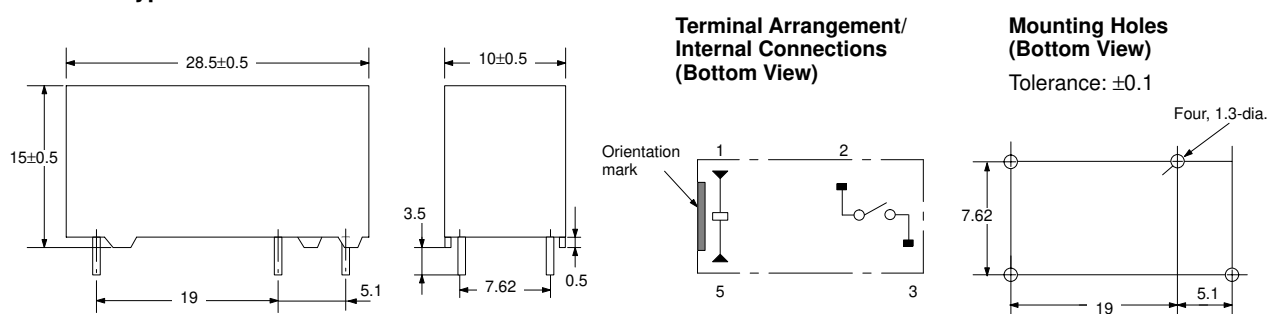

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. K96-E1-2 In the interest of product improvement, specifications are subject to change without notice.

## OMRON Corporation

Control Components Division H.Q.  
28th Fl., Crystal Tower Bldg.  
1-2-27, Shiomi, Chuo-ku,  
Osaka 540 Japan  
Phone: 06-949-6115 Fax: 06-949-6134

Printed in Japan  
1196-1M (0196) a