




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Specification:

- 1) Rating: 3 A 125 VAC; 1 A 250 VAC
- 2) Contact Resistance: 20 mΩ max.
- 3) Insulation Resistance: 500 VDC 1000 MΩ min.
- 4) Dielectric strength: 1500 VAC, 1 minute
- 5) Operating Temperature: -20°C ~ +65°C
- 6) Electrical Life: 20000 cycles

TSSM1022C3F

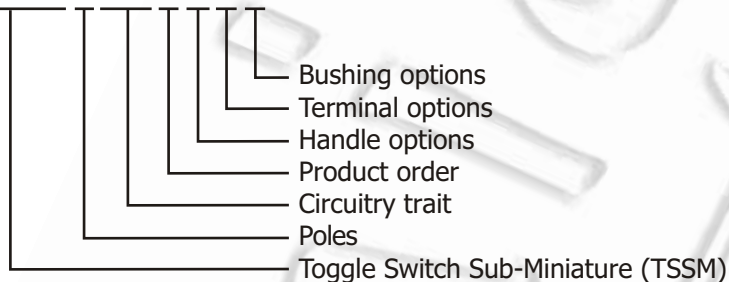


CIRCUITRY TRAIT

01	ON	-	OFF
02	ON	-	ON
03	ON	OFF	ON
13	ON	OFF	(ON)

() indicates momentary


HANDLE OPTIONS

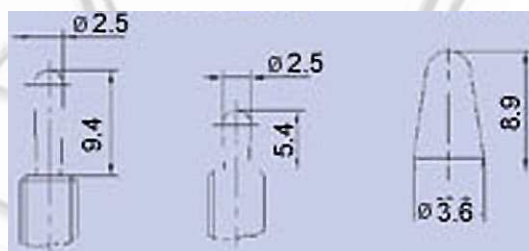


RD red
 BK black
 WH white
 YL yellow
 GN green
 BU blue

Standard (A) Short (C) Toggle (D)

NAMEPLATE

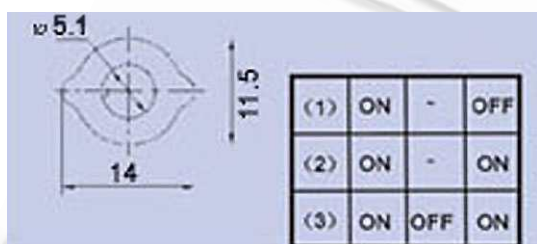


BUSHING OPTIONS

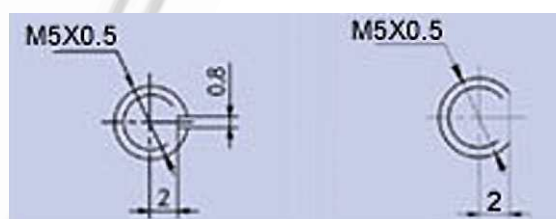

Standard () Flat (F)



TERMINAL OPTIONS

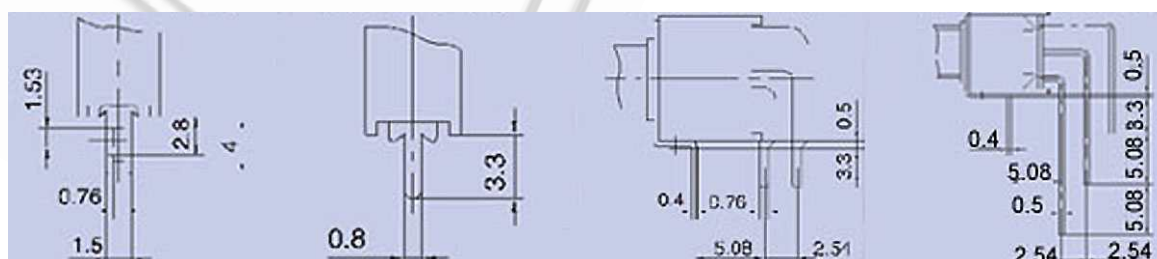



Solder terminal (1) PC terminal (2) PC-H terminal (3) PC-V terminal (4)





TSSM101 ON-OFF
SPST 2P





TSSM102 ON-ON
SPDT 3P





TSSM202 ON-ON
DPDT 6P





TSSM101A2 ON-OFF
SPST 2P



TSSM102A2 ON-ON
SPDT 3P





TSSM202A2 ON-ON
DPDT 6P









TSSM1012A1 ON-OFF
SPST 2P





TSSM1012A5 ON-OFF
SPST 2P





TSSM1022A1 ON-ON
TSSM1032A1 ON-OFF-ON
SPDT 3P





TSSM2022A1 ON-ON
TSSM2032A1 ON-OFF-ON
DPDT 6P



TSSM1012C2T ON-OFF
SPST 2P




TSSM1022C2T ON-ON
TSSM1032C2T ON-OFF-ON
SPDT 3P







TSSM2022C2T ON-ON
TSSM2032C2T ON-OFF-ON
 DPDT 6P

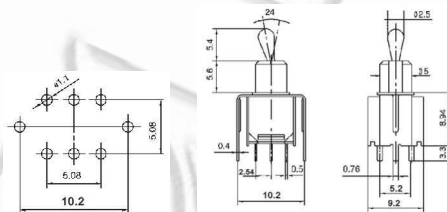


TSSM1022C3 ON-ON
TSSM1032C3 ON-OFF-ON
 SPDT 3P

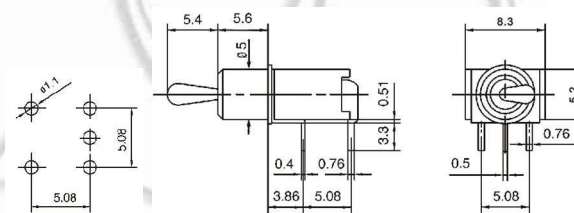


TSSM2022C3 ON-ON
TSSM2032C3 ON-OFF-ON
 DPDT 6P

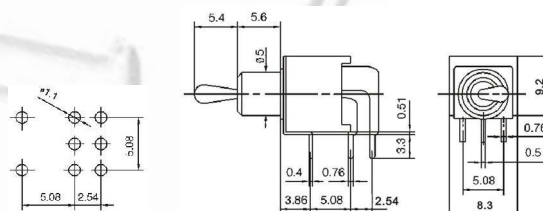

TSSM1012C4 ON-OFF
 SPST 2P

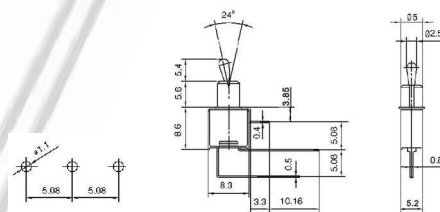

TSSM1022C4 ON-ON
TSSM1032C4 ON-OFF-ON
 SPDT 3P

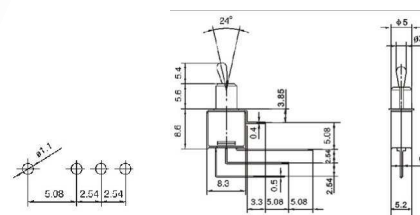

TSSM2022C4 ON-ON
TSSM2032C4 ON-OFF-ON
 DPDT 6P

