



**HESTORE.HU**

elektronikai alkatrész áruház

**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

## FEATURES AND SPECIFICATIONS

## Features and Benefits

- Wire-to-wire plug for panel-mounted or free-hanging applications
- Available with and without panel mounting ears
- Positive housing locks to mate with Mini-Fit, Jr. receptacle
- Fully isolated terminals to protect contacts from damage
- Uses standard Mini-Fit series terminals

## Reference Information


Product Specification: PS-5556-0001  
 Packaging: Tray or bag  
 UL File No.: E29179  
 CSA File No.: LR19980  
 TUV License No.: R75142  
 Mates With: [5557](#) single row receptacle  
 Use With: [5558](#), [30490](#) or 44478 terminals  
 Designed In: Millimeters

## Mechanical


Contact Insertion Force: 1.5kg max.  
 Contact Retention to Housing: 3.0kg min.  
 Wire Pull-Out Force: 9.0kg min.  
 Insertion Force to PCB: 5.0kg max.  
 Mating Force: 0.7kg (1.54 lb) max.  
 Unmating Force: 0.35kg (0.7 lb) min.  
 Normal Force: 200g min.  
 Durability: 30 cycles

## Physical

Housing: 6/6 nylon, UL 94V-2 or 94V-0  
 Contact: Brass or Phosphor Bronze  
 Plating: Tin, select Gold or overall Gold  
 Operating Temperature: -40 to +105°C

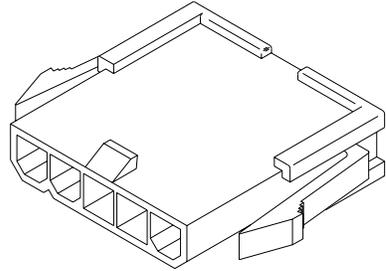
**4.20mm (.165") Pitch  
 Mini-Fit, Jr.™  
 Plug**
**5559****Single Row, With and Without Panel Mount Ears**

## CATALOG DRAWING (FOR REFERENCE ONLY)

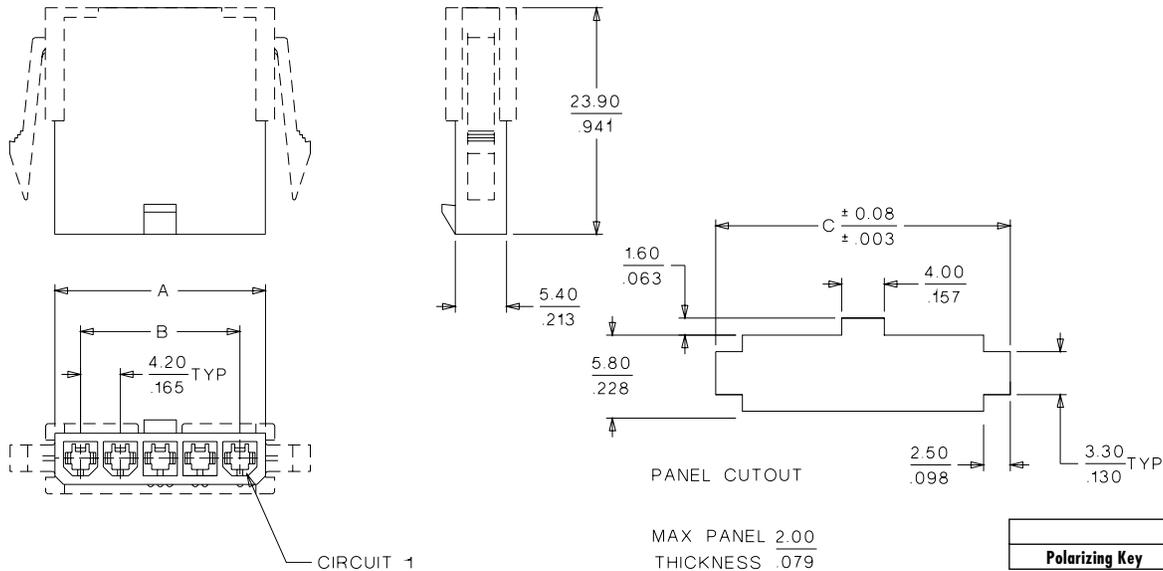

<b>Polarizing Key</b>	<b>Order No.</b> 15-04-0211
-----------------------	--------------------------------

## ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.				Dimension		
	Panel Mount		Free Hanging		A	B	C
	94V-2	94V-0	94V-2	94V-0			
3*	• 39-01-4032	• 39-01-4033	• 39-01-4036	• 39-01-4037	13.80 (.543)	8.40 (.331)	19.20 (.756)
4			• 39-01-4046		18.00 (.709)	12.60 (.496)	23.40 (.921)
5	• 39-01-4052	• 39-01-4053	• 39-01-4056	• 39-01-4057	22.20 (.847)	16.80 (.661)	27.60 (1.087)

• US Standard Product, available through Molex franchised distributors

\* 3-circuit plug designed for first-mate/last-break applications