





EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

Rating	3A 125V AC 1.5A 250V AC	CM us	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1000V 1 minute			
Switch Function	2P SPST OFF-(ON)			

Material:



Housing: PBT, Black

Button: ABS, Green

Slider: ABS, White



1 HEX NUT ASSY
1 SPRING WASHER ASSY

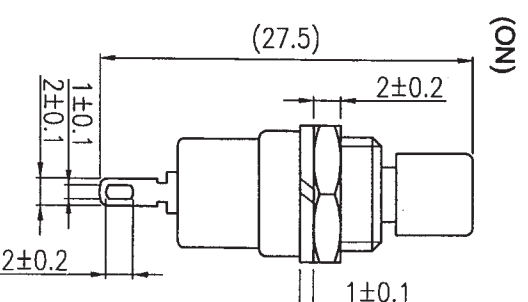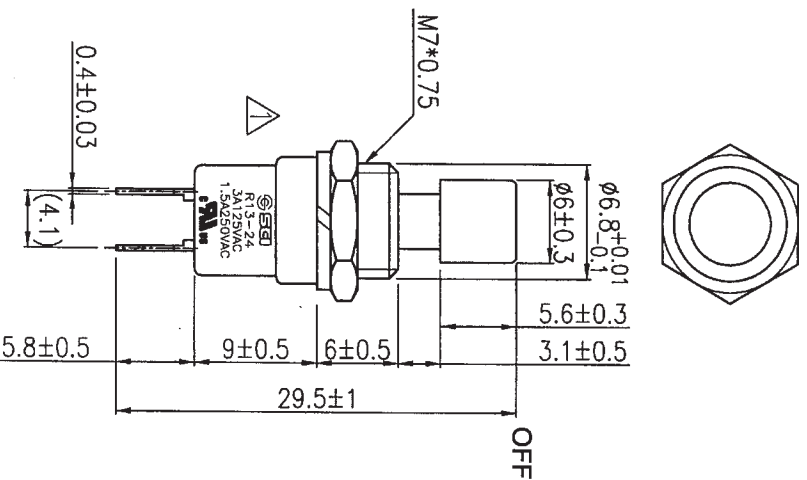

08/06/13	柳新強	依BOM表及實物修正按鍵顏色, White=>Green			△
07/02/12	柳新強	增加SCI LOGO			△
Date	Name	Description			No.
Drawn	Checked	Approved	SCI BOM No.	1830036	Model Name PUSH SWITCH
柳新強	待審核	Shinich	Customer No.		Model No. R13-24A-05-WH
08/06/13	8/6-113	8/12-13	Unit	mm	Shin Chin Industrial Co., Ltd.
					Rev. 2