




HESTORE.HU
elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

■ PRODUCT CHARACTERISTICS

BVCBO	700V
BVCEO	400V
HFE@5V2A	8-40
IC	12A

Symbol

TO-247
■ ORDER INFORMATION

Order codes		Package	Packing
Halogen-Free	Halogen		
N/A	MOT13009DW	TO-247S	30 pieces/Tube

■ ABSOLUTE MAXIMUM RATING

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Emitter Voltage		V_{CEO}	400	V
Collector-Emitter Voltage ($V_{BE}=-1.5V$)		V_{CEV}	700	V
Emitter Base Voltage		V_{EBO}	9	V
Collector Current	Continuous	I_C	12	A
	Peak	I_{CM}	24	A
Base Current	Continuous	I_B	6	A
	Peak	I_{BM}	12	A
Emitter Current	Continuous	I_E	18	A
	Peak	I_{EM}	36	A
Power Dissipation		P_D	80	W
Derate above 25°C			640	mW/°C
Junction Temperature		T_J	+150	°C
Storage Temperature		T_{STG}	-40 ~ +150	°C

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient		θ_{JA}	21	°C/W
Junction to Case		θ_{JC}	1.55	°C/W

■ ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$, unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS (Note)						
Collector-Emitter Sustaining Voltage	V_{CEO}	$I_C = 10\text{mA}, I_B = 0$	400	-	-	V
Collector Cutoff Current	I_{CEV}	$V_{BE(OFF)} = 1.5V_{DC}$	-	-	1	mA
V_{CBO} =Rated Value		$V_{BE(OFF)} = 1.5V_{DC}, T_C = 100^\circ\text{C}$	-	-	5	
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 9V_{DC}, I_C = 0$	-	-	1	mA
ON CHARACTERISTICS (Note)						
DC Current Gain	h_{FE1}	$I_C = 5\text{A}, V_{CE} = 5\text{V}$	-	-	40	
	h_{FE2}	$I_C = 8\text{A}, V_{CE} = 5\text{V}$	-	-	30	
Current-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C = 5\text{A}, I_B = 1\text{A}$	-	-	1	V
		$I_C = 8\text{A}, I_B = 1.6\text{A}$	-	-	1.5	V
		$I_C = 12\text{A}, I_B = 3\text{A}$	-	-	3	V
		$I_C = 8\text{A}, I_B = 1.6\text{A}, T_C = 100^\circ\text{C}$	-	-	2	V
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C = 5\text{A}, I_B = 1\text{A}$	-	-	1.2	V
		$I_C = 8\text{A}, I_B = 1.6\text{A}$	-	-	1.6	V
		$I_C = 8\text{A}, I_B = 1.6\text{A}, T_C = 100^\circ\text{C}$	-	-	1.5	V
DYNAMIC CHARACTERISTICS						
Transition frequency	f_T	$I_C = 500\text{mA}, V_{CE} = 10\text{V}, f = 1\text{MHz}$	4	-	-	MHz
Output Capacitance	C_{OB}	$V_{CB} = 10\text{V}, I_E = 0, f = 0.1\text{MHz}$	-	180	-	pF
SWITCHING CHARACTERISTICS (Resistive Load, Table 1)						
Delay Time	t_{DLY}	$V_{CC} = 125\text{Vdc}, I_C = 8\text{A}$ $I_{B1} = I_{B2} = 1.6\text{A}, t_P = 25\mu\text{s}$ Duty Cycle $\leq 1\%$	-	0.06	0.1	μs
Rise Time	t_R		-	0.45	1	μs
Storage Time	t_S		-	1.3	3	μs
Fall Time	t_F		-	0.2	0.7	μs
Inductive Load, Clamped (Table 1, Fig. 13)						
Voltage Storage Time	t_S	$I_C = 8\text{A}, V_{CLAMP} = 300\text{V}, I_{B1} = 1.6\text{A}$	-	0.92	2.3	μs
Crossover Time	t_C	$V_{BE(OFF)} = 5\text{V}, T_C = 100^\circ\text{C}$	-	0.12	0.7	μs

 Note: Pulse Test: Pulse Width = 300 μs , Duty Cycle = 2%

■ TYPICAL CHARACTERISTICS

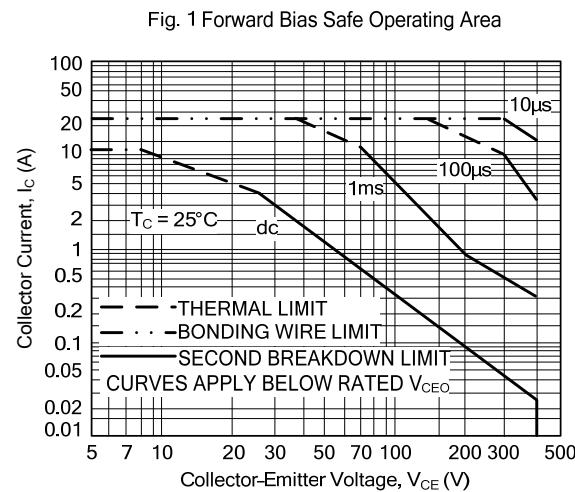


Fig. 2 Reverse Bias Switching Safe Operating Area

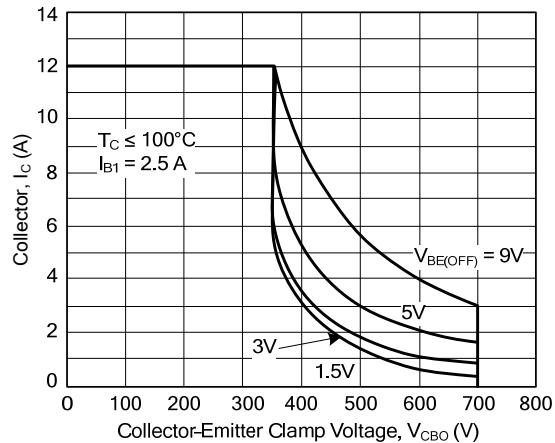
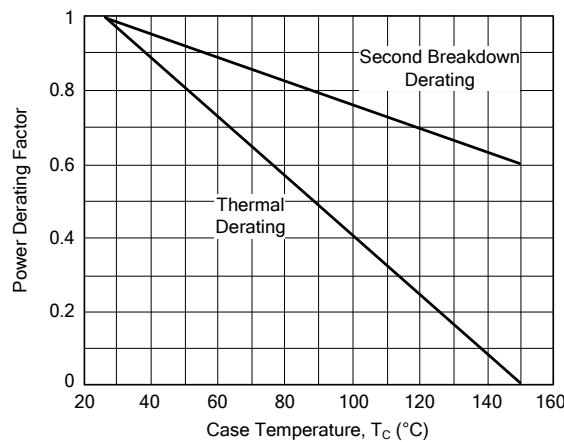
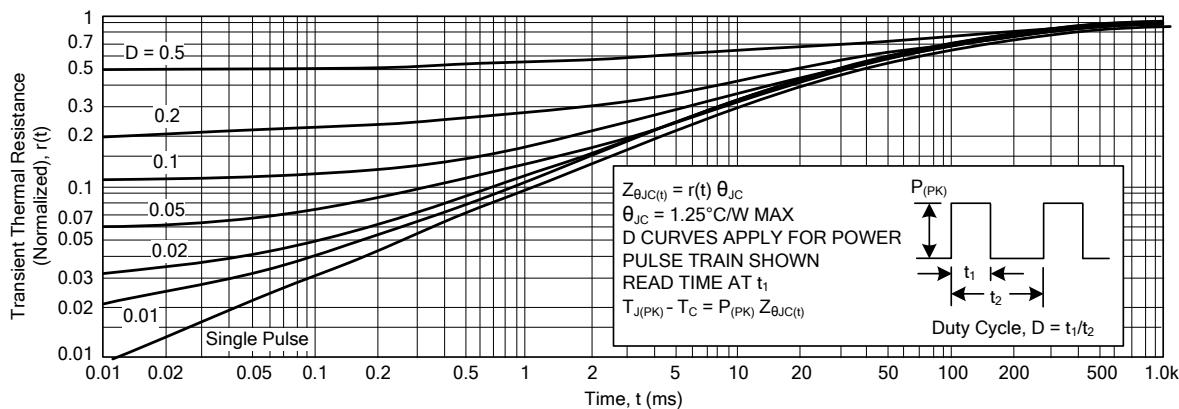


Fig. 3 Forward Bias Power Derating


 Fig. 4 Typical Thermal Response [$Z_{\theta JC}(t)$]


■ TYPICAL CHARACTERISTICS(Cont.)

Fig. 5 DC Current Gain

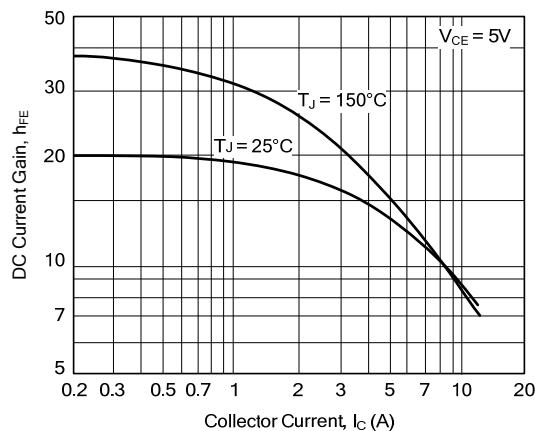


Fig. 6 Collector Saturation Region

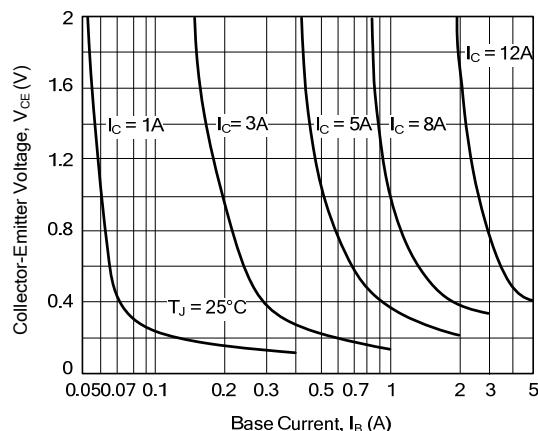


Fig. 7 Base-Emitter Saturation Voltage

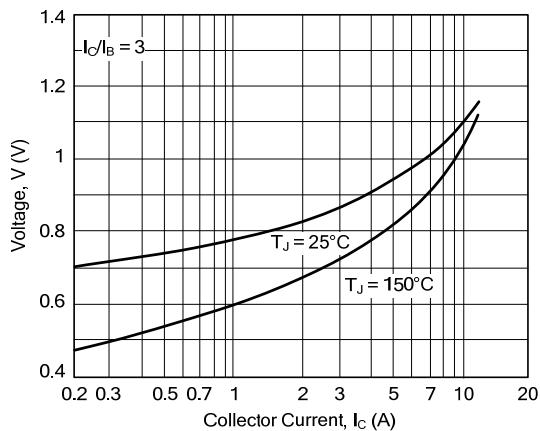


Fig. 8 Collector-Emitter Saturation Voltage

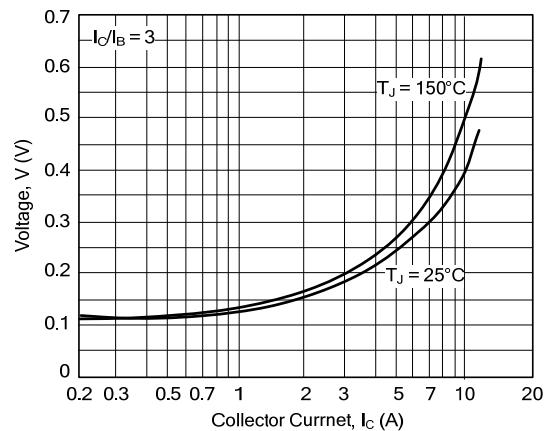


Fig. 9 Collector Cutoff Region


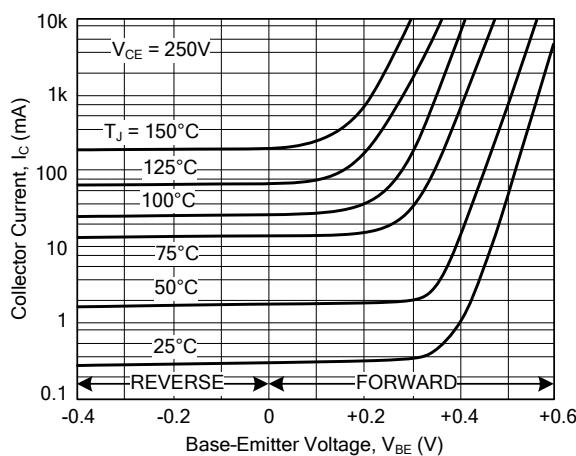


Fig. 10 Capacitance

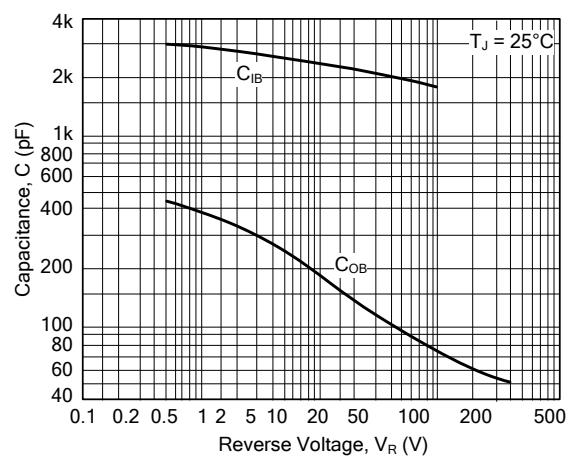

■ RESISTIVE SWITCHING PERFORMANCE

Fig. 11. Turn-On Time



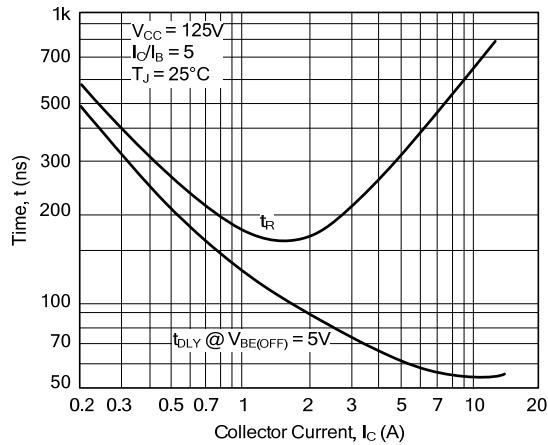


Fig. 12 Turn-Off Time


 Fig. 13 Typical Inductive Switching Waveforms
 (at 300V and 12A with $I_{B1} = 2.4\text{A}$ and $V_{\text{BE}(\text{off})} = 5\text{V}$)


■ TO-247-3L PACKAGE OUTLINE DIMENSIONS

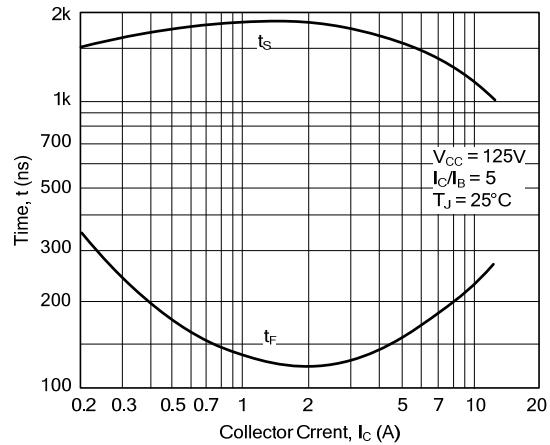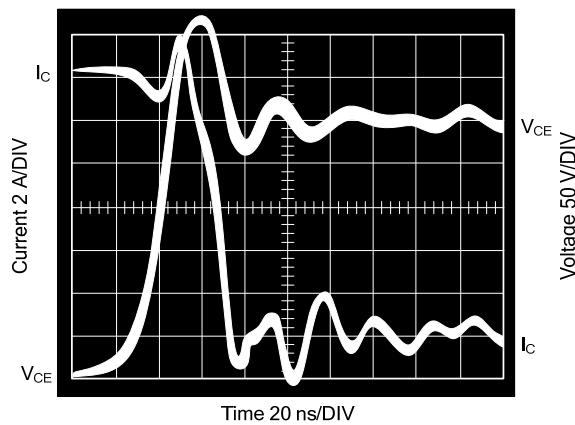