




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

A range of audio and video connectors incorporating many innovative features.
Assembly and disassembly is screwless and is achieved by a few turns of the back shell.

- Available in satin nickel or matt black finish, with silver gold plated contacts.
- The strain relief collet ensures a positive cable grip.
- Generous solder buckets enable easier cable assembly as well as catering for larger conductive sizes.
- A range of coloured plastic coding rings is also available, each with a single number moulded in, offering a quick and easy system of channel identification.

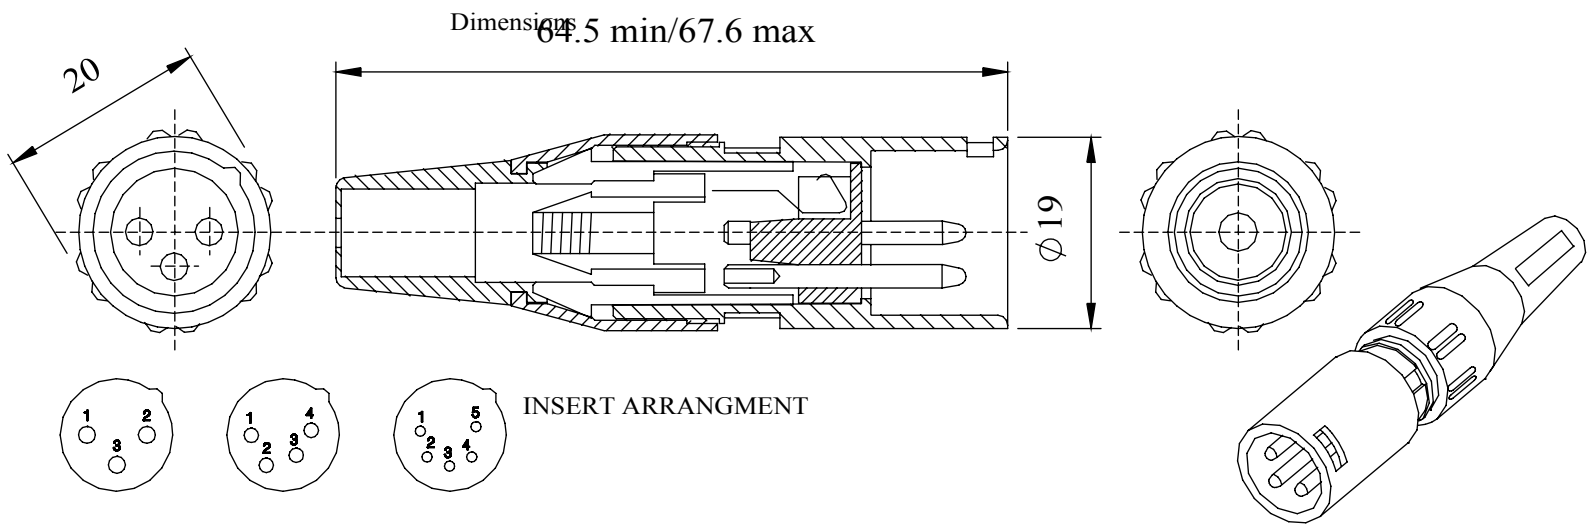

Deltron Part No	Silver Contacts		Gold Contacts	
	Nickel	Black	Nickel	Black
3-Way	701-0300	709-0300	705-0300	713-0300
4-Way	701-0400	709-0400	705-0400	713-0400
5-Way	701-0500	709-0500	705-0500	713-0500

Mechanical Properties

Cable retention	Chuck and screw collar
Cable range	Ø 2.8mm to Ø 8.0mm
Housing	Zinc high pressure diecasting satin nickel or black chrome
Contact base	Valox DR48
Contacts	Brass, 3 microns silver anti-tarnish finish or 0.5 microns gold
Strain Relief	P.V.C. (black)
Sealing ring	Santoprene (UL 94 HB)
Chuck	Acetal (UL 94 HB)
Screw collar	Zinc high pressure diecasting satin nickel or black chrome
Screen	Spring Steel, 3 microns silver anti-tarnish
Interchangeable	Spring on coloured rings
Connector ident	Acetal (UL 94 HB)
Ident options	Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Grey, White

Electrical

Rated Voltage	50 V a.c.
Test Voltage	1000 V r.m.s.
Insulation Resistance	103 MΩ
After damp heat	500 MΩ
Contact Resistance	10 mΩ max
Current Rating at 40 deg C	3 pin - 15 amp 4 pin - 10 5 pin - 7.5 amp
Current Rating at 70 deg C	3 pin - 7.5 amp 4 pin - 5 5 pin - 3 amp
Terminal wire sizes	3 pin 2.5 mm ² / 14 AWG 4 pin 1.5 mm ² / 16 AWG 5 pin 1.0 mm ² / 18 AWG
Climatic	
Climatic category	25/070/04
Temperature Range	-25°C to +70°C
Damp heat, steady state	4 days

