




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

S/N	DESCRIPTION	APPROVED	DATE
1			
2			
3			
4			

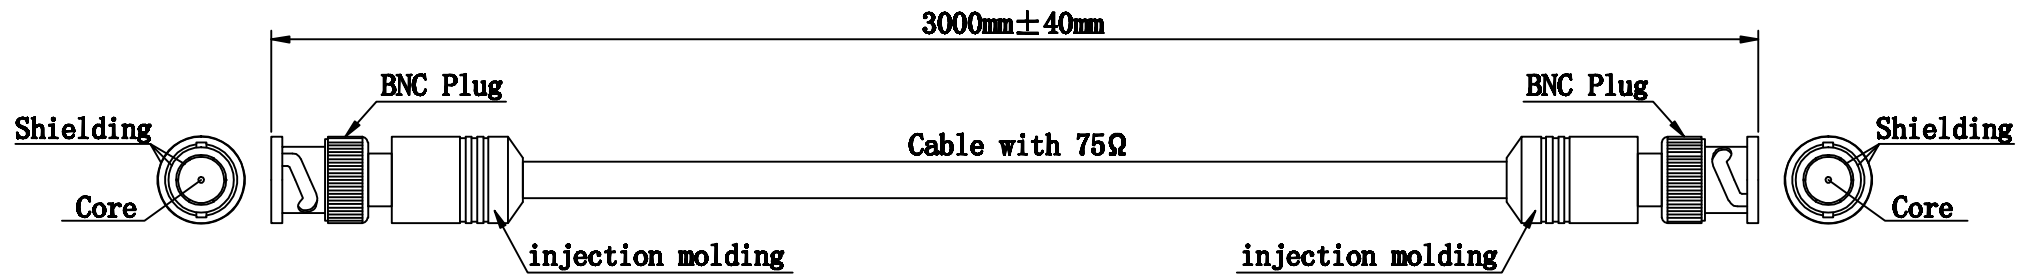

BNC video connector cable (RG59), double shielded

Connectors: 2x BNC male

2x BNC male

Contacts: nickel-plated (gold-plated pins)

nickel-plated (gold-plated pins)

Conductor area: 0.324 mm²

0.324 mm²

AWG: 22

22

Composition of conductor: 1 x 0.643 mm

1 x 0.643 mm

Conductor material: CCS

CCS

Insulation material: PE

PE

Jacket material: PVC

PVC

Conductor resistance: $300 \pm 10 \text{ } \Omega/\text{km}$

 $300 \pm 10 \, \Omega/\text{km}$

Shielding: 30 % coverage

30 % coverage

Capacitance: 58 ± 5 pF/m


 $58 \pm 5 \text{ pF/m}$

Cable OD: 6.0 ± 0.2 mm

 $6.0 \pm 0.2 \text{ mm}$

Weight: 41 ± 2 g/m

41 ± 2 g/m

13				Tolerance (mm)			
12				Wire harness size	Trunk	Protection tube	Positioning space
11				L≤200	+20 -10		±5
10				200<L≤500	+25 -10		±5
9				500<L≤1000	+40 -20		±10
8				1000<L≤2000	+60 -30		±20
7				2000<L≤3000	+80 -30		±30
6				3000<L≤5000	+80 -30		±30
5				L>5000	+100 -50		±40
4							
3							
2							
1							
SYM	Name	Description	Remarks				

APPROVED	Shen Juan		
CHECKED	Li Jie		
DRAWN	Zhang Yining	Customer :	Date : 2023-10-19
UNIT	mm	DRAWING NO.	SIZE:
		BNC-075-3.0	A4
REV	1	CUSTOMER NO.	PAGE:
			1/1