

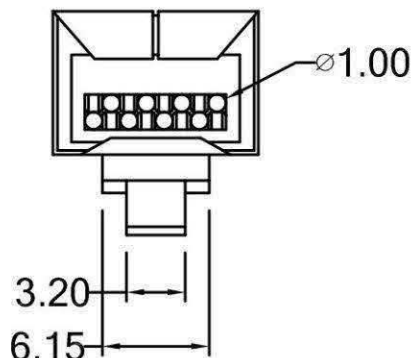
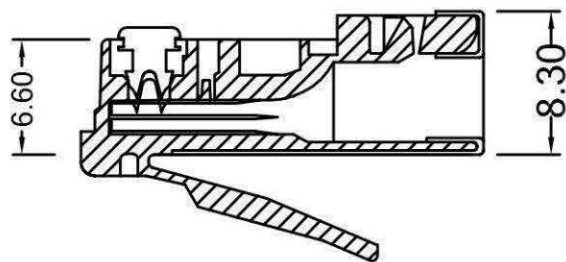


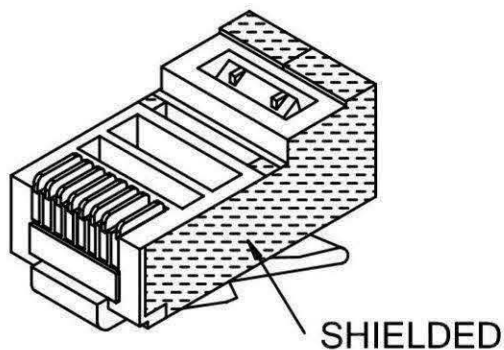

EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

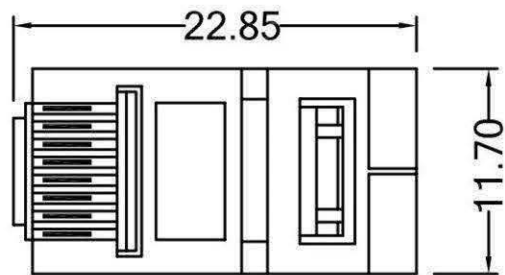

MATERIAL & FINISH

Body: Polycarbonate, UL94V-2, clean

Terminal: 0.35 mm thickness copper alloy, underplated with 100 uin Nickel, and plated with selective Gold in contact region and gold flash on remainder of terminal.

SPECIFICATION:

Voltage : 125 VAC

Current : 1.5 A

Contact Resistance : 30 milliohms max.

Insulation Resistance : 500 megaohms min.

Dielectric Withstanding Voltage : 1000 VAC

St : 2 prong for stranded wire.

So : 2 prong for solid wire.

SS:3 prong for solid and stranded wire.

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准

DWG. HELEN

DATE 2011/9/9



SCALE
比例 参考

UNIT
单位 M M

PAGE
张数 1 OF 1

TOLERANCE
容許公差

0.00 ± 0.1
ANG. ±

SIZE
紙張尺寸 A 4

REV.
版本 A

PART NAME 品名

8P8C MODULAR JACK
SHIELDED FOR CAT6 CABLE

PART NO.

料號 RJ45-8P8C-CAT6-xxSH