





EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

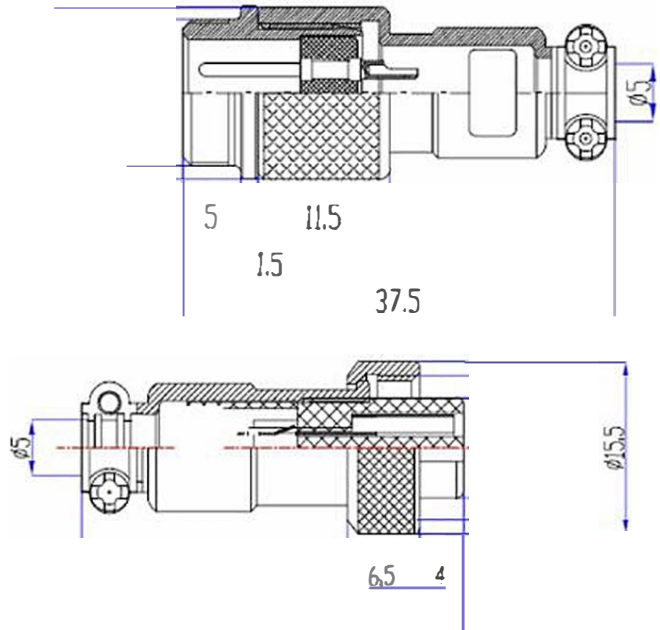

Material and Specifications

Coupling	Threaded Coupling				
Shell Material	Zinc Alloy with Nickel plated				
Insert Material	Bakelite				
Contact Material	Copper (Silver plated/Gold)				
Termination	Solder				
Mating Cycle	500 Times				
Temperature Range	-20°C ~ +85°C				
Cable Diameter	≤ Φ5.0mm				
Protection Degree	IP55				
Core Number	2 Core	3 Core	4 Core	5 Core	6 Core
Contact Arrangement					
Contact Diameter, Number	Φ 1.2*2	Φ 1.2*3	Φ 1.2*4	Φ 1.2*5	Φ 1.2*6
Rated Current(A)	5	5	5	5	5
Working Voltage	250	250	250	250	250
(AC,V,RMS)					