



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

TACT AND KEY SWITCHES

PRODUCT NUMBER 6425.4131



TECHNICAL DATA


Product number	6425.4131
Product family	Tact and key switches
Actuation type	direct
Pitch	16 mm
Weight	1.387 g
ROHS conform	yes
Switching function	Normally open contact (SPNO)
Material fixed contact	Au
Number of poles	1 - pole
connections	PCB terminal
Rating IEC	100 mA 28 V
Contact resistance (new condition)	< 250 mOhm
Insulation resistance (new condition)	> 100 MOhm
Ambient temperature	-20 °C ... +70 °C
Storage temperature	-55 °C ... +75 °C
Actuators and additional actuators	key shaft: POM, natural
Housing description	base plate: PBTP, black

Connection surface	→ bearing connection → external connection	tinned tinned
Contact material	Au	
Contact distance	< 3 mm	
Lighting	function illumination: LED, 0.02 A, green	
Miscellaneous	The key base of the standard key can be snapped into a 1.2 mm thick frame with a cut-out of 13.55 x 13.55 mm.	
Contact type	lifting contact	
Operating force	0.7 N	
Bounce time	< 5 ms	
Total travel / stroke	1.4 ± 0.2 mm	
Type of fastening	Snap fastening	
Stock version	●	

PRODUCT IMAGE



DRAWINGS

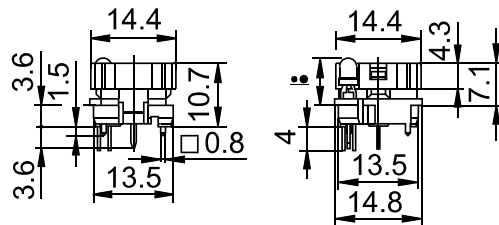

Technical changes reserved. Dimensions are not binding.
Detailed specifications available on request.

Marquardt GmbH · Schloss-Straße 16 · 78604 Rietheim-Weilheim · Germany
Phone: +49 (0) 7424 / 99-0 · Fax: +49 (0) 7424 / 99-2399 · www.marquardt.com · marquardt@marquardt.de