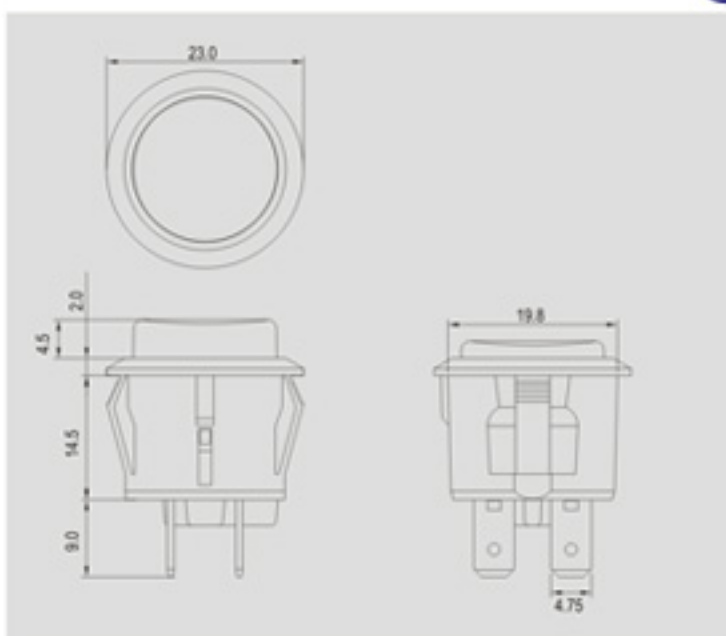







EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

CAUS



Rating								
10A 125V AC 1/2HP 6A 250V AC 1/2HP								
Contact resistance								
50mΩ Max								
Insulation resistance								
DC 500V 100MΩ Min								
Dielectric strength								
AC 1000V 1 minute								
Cut-out								
								
Cut-out for X2 BUTTON								
								
BUTTON								
<table><tr><td>A/AL B/BL C/CB CL D/DB DL</td><td></td><td>A2/A2L B2/B2L C2/C2B C2L D2/D2B D2L</td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>	A/AL B/BL C/CB CL D/DB DL		A2/A2L B2/B2L C2/C2B C2L D2/D2B D2L					
A/AL B/BL C/CB CL D/DB DL		A2/A2L B2/B2L C2/C2B C2L D2/D2B D2L						
								
<table><tr><td>ASL BSL CSB CSL DSL DSB</td><td></td></tr><tr><td></td><td></td></tr></table>	ASL BSL CSB CSL DSL DSB							
ASL BSL CSB CSL DSL DSB								
								

- * MATERIAL: Frames are nylon (UL flame:94V-2). Terminals are silver plated brass.
- * Illuminated actuators are molded in PC, available with red, amber and green colors.
- * Snap-in mounting, easy to install switch into panel.
- * Water proof and dust proof to fit IP-65.

R13-527 -

FUNCTION		TERMINAL
Non-illuminated button (不帶燈)		0 2 .187" SQ
B 4P DPST	D 2P SPST	
Illuminated / Different button (帶燈/按鈕不同)		
B L 4P DPST (NEON) 125VAC 33KΩ / 250VAC 150KΩ	B 5 L 4P DPST (ILLUMINATED/LED dependent) 125VAC 33KΩ / 250VAC 150KΩ	D 5 B 3P SPST (ILLUMINATED/LED dependent) 125VAC 33KΩ / 250VAC 150KΩ
Momentary / Non-illuminated button (彈回/不帶燈)		
A 4P DPST	C 2P SPST	
Momentary / Non-illuminated / Different button (彈回/不帶燈 / 按鈕不同)		
A L 4P DPST (ILLUMINATED) 125VAC 33KΩ / 250VAC 150KΩ	A 5 L 4P DPST (ILLUMINATED/LED dependent) 125VAC 33KΩ / 250VAC 150KΩ	C B 3P SPST (ILLUMINATED/LED dependent) 125VAC 33KΩ / 250VAC 150KΩ
C 5 B 3P SPST (ILLUMINATED/LED dependent) 125VAC 33KΩ / 250VAC 150KΩ		
Independent circuit (獨立迴路)		
C L 4P SPST (LED independent)	C 5 L 4P SPST (LED independent)	D L 4P SPST (LED independent)
D 5 L 4P SPST (LED independent)		
Waterproof (防水)		
A 2 4P DPST	A 2 L 4P DPST (ILLUMINATED/LED dependent) 125VAC 33KΩ / 250VAC 150KΩ	B 2 4P DPST
B 2 L 4P DPST (ILLUMINATED/LED dependent) 125VAC 33KΩ / 250VAC 150KΩ	C 2 2P SPST	
C 2 B 3P SPST (ILLUMINATED/LED dependent) 125VAC 33KΩ / 250VAC 150KΩ	C 2 L 4P SPST (LED independent)	D 2 2P SPST
D 2 B 3P SPST (ILLUMINATED/LED dependent) 125VAC 33KΩ / 250VAC 150KΩ	D 2 L 4P SPST (LED independent)	