



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

1 2 3 4 5 6 7 8

F

E

D

C

B

A

F

E



D

C

B

A

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080201-1	ORIGINAL RELEASE		

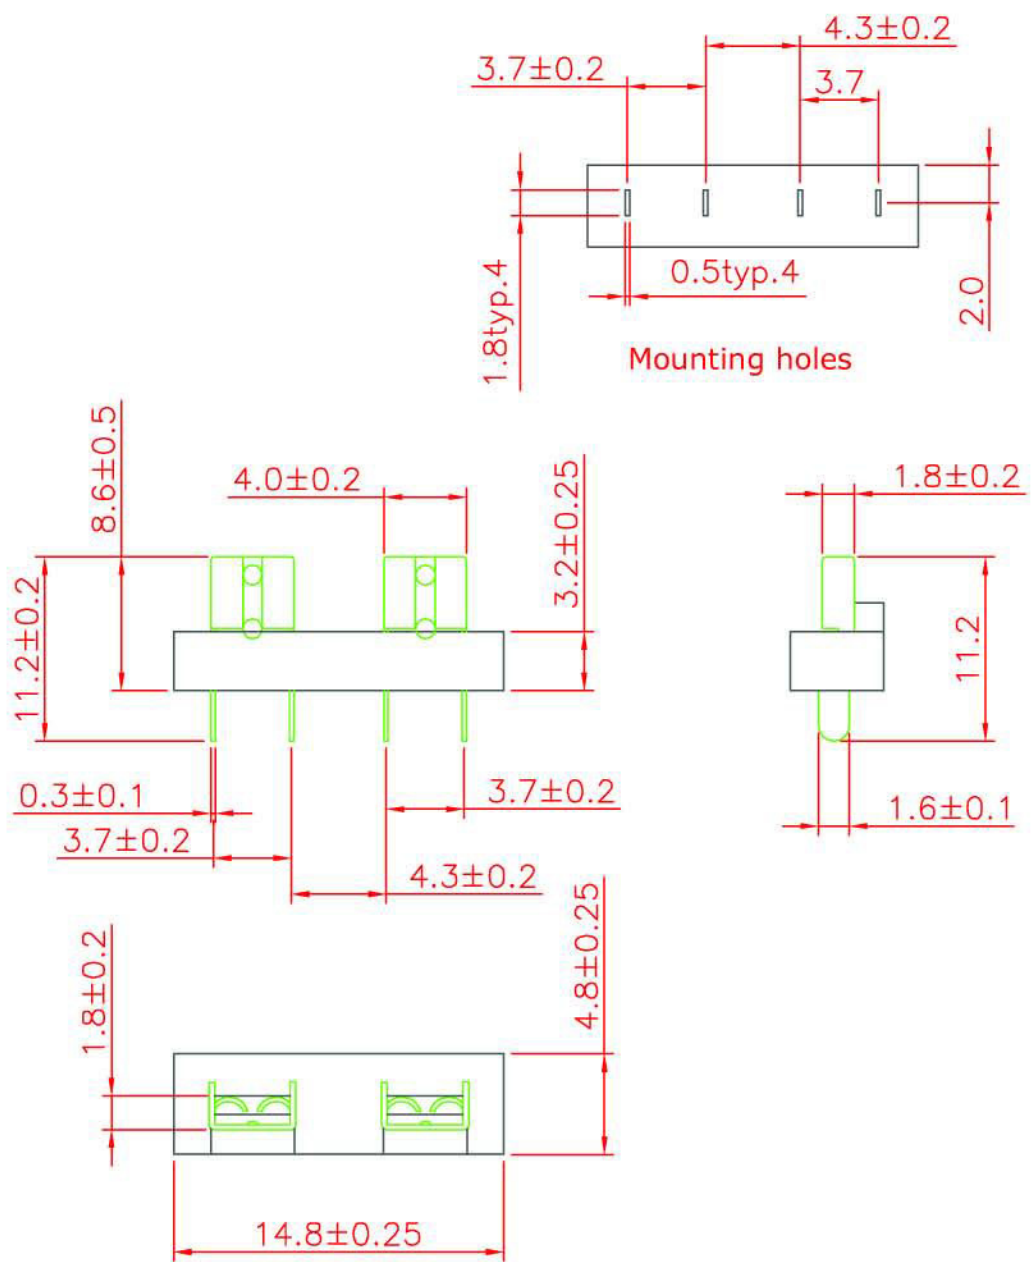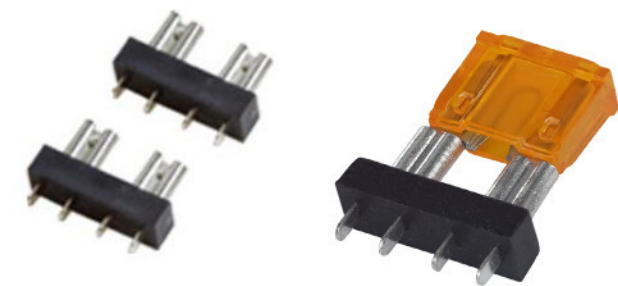

- NOTES: UNLESS OTHERWISE SPECIFIED.
- 1.Material:spring brass, T=0.3MM
 - 2.Finish: Ni plated or Tin plated
 - 3.Removed burrs and sharp edge
 - 4.For mini blade fuse
 - 5.Max rated current:30A

DONGGUAN REOMAX ELECTRONIC CO., LTD										
RoHS COMPLIANT				FUSE holder FOR MIN fuse						
UNLESS OTHERWISE STATED										
WALL THICKNESS		 MM		DSGN	Tommy Qiu	08-1-07	SCALE	free		
LINEAR	.XX	± 0.15 MM								
	.XXX	± 0.05 MM								
ANGULAR		± 0.5 DEG		DFTS	Tommy Qiu	08-1-07	SHEET	1 OF 1		
DRAFT ANGLE/SIDE		0.5 ° MAX								
BURR & FLASH		0.10 MAX								
BREAK CORNERS		0.20 R.MAX		CHKD			PART NO.		REV	
PARTING LINE MISMATCH		0.05 MAX								
APPD								SL-506P		B

1 2 3 4 5 6 7 8