




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

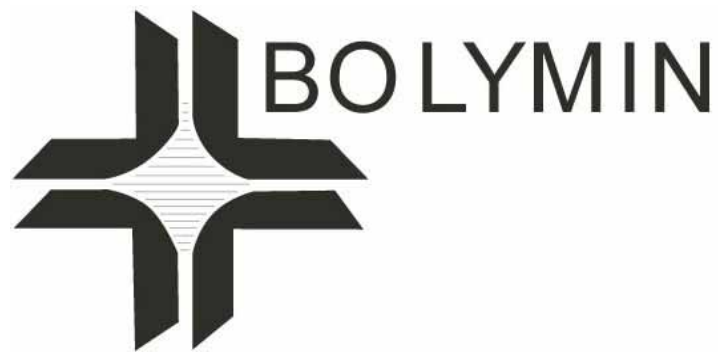

SPECIFICATIONS FOR LCD MODULE

MODEL NO.

BC1602L series

VER.01

FOR MESSRS:

ON DATE OF:

APPROVED BY:

BOLYMIN, INC.

13F-1, 20, TA-LONG RD., TAICHUNG CITY 403, TAIWAN, R.O.C.

WEB SITE:<http://www.bolymin.com.tw> **TEL: +886-4-23293029 FAX: +886-4-2329305**

History of Version

Version	Contents	Date	Note
01	NEW VERSION	2008/09/11	SPEC.

CONTENTS

1. Numbering System
2. Precautions in use of LCD Modules
3. General Specification
4. Absolute Maximum Rating
5. Electrical Characteristics
6. Optical Characteristics
7. Interface Pin Function
8. Power supply for LCD Module and LCD operating voltage adjustment
9. Backlight information
10. Quality Assurance
11. Reliability
12. Appendix (Drawing , ST7066U controller data)
 - 12-1 Drawing
 - 12-2 ST7066U controller data
 - 12-2.1 Function description
 - 12-2.2 C.G ROM table. table 2
 - 12-2.3 Instruction table
 - 12-2.4 Timing characteristics
 - 12-2.5 Initializing soft ware of LCM

1. Numbering System

<u>B</u>	<u>C</u>	<u>1602</u>	<u>L</u>	:	:	:	:	:	<u>xxx</u>
0	1	2	3	4	5	6	7	8	9

0	Brand	Bolymin	
1	Module Type	C= character type G= graphic type P= TAB/TCP type	O= COG type F= COF type L=PLED/OLED
2	Format	2002=20 characters, 2 lines 12232= 122 x 32 dots	
3	Version No.	A type	
4	LCD Color	G=STN/gray Y=STN/yellow-green PLED/yellow-green C=color STN,OLED/RGB	B=STN/blue,OLED/blue F=FSTN T=TN D=OLED/blue+yellow A=OLED/blue+yellow+green
5	LCD Type	R=positive/reflective P=positive/transflective	M=positive/transmissive N=negative/transmissive
6	Backlight type/color	L=LED array/ yellow-green H=LED edge/white R=LED array/red G=LED edge/yellow-green F=RGB Q=LED edge/red N=No backlight	D=LED edge/blue E=EL/white B=EL/blue C=CCFL/white Y=LED Bottom/yellow O=LED array/orange K=LED edge/green A=LED edge/amber
7	CGRAM Font (applied only on character type)	J=English/Japanese Font E=English/European Font G=Chinese(simple) F=Chinese(traditional)	C=English/Cyrillic Font H=English/Hebrew Font A=English/Arabic Font
8	View Angle/ Operating Temperature	B=Bottom/Normal Temperature H=Bottom/Wide Temperature U=Bottom/Ultra wide Temperature	T=Top/Normal Temperature W=Top/Wide Temperature C=9H/Normal Temperature E=Top/ultra wide temperature
9	Special Code	3=3 volt logic power supply n=negative voltage for LCD c=cable/connector xxx=to be assigned on datasheet	t=temperature compensation for LCD p=touch panel \$=RoHS

2. Precaution in use of LCD Module

- (1) Avoid applying excessive shocks to the module or making any alterations or modifications to it.
- (2) Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.
- (3) Don't disassemble the LCM.
- (4) Don't operate it above the absolute maximum rating.
- (5) Don't drop, bend or twist LCM.
- (6) Soldering: only to the I/O terminals.
- (7) Storage: please storage in anti-static electricity container and clean environment.
- (8) Don't touch the elastmer connector, especially insert a backlight panel (EL or CCFL)

3. General Specification

(1) Mechanical Dimension

Item	Dimension	Unit
Number of Characters	16characters x 2 Lines	-
Module dimension (L x W x H)	68.0 x 26.8 x13.8(Max)	mm
View area	61.0 x 19.0	mm
Active area	56.2 x 14.2	mm
Dot size	0.56 x 0.8	mm
Dot pitch	0.6 x 0.84	mm
Character size (L x W)	2.96x 6.68	mm
Character pitch (L x W)	3.55 x 7.52	mm

(2) Controller IC: **ST7066U**

(3) Temperature Range

	Normal	Wide
Operating	0 ~+50 ℃	-20 ~+70 ℃
Storage	-10 ~+60 ℃	-30 ~+80 ℃

4. Absolute Maximum Ratings

4.1 Electrical Absolute Maximum Ratings

(V_{ss}=0V, Ta=25 °C)

Item	Symbol	Min	Max	Unit
Supply Voltage (Logic)	V _{dd} -V _{ss}	-0.3	7	V
Supply Voltage (LCD Driver)	V _{dd} -V _o	-0.3	13	V
Input Voltage	V _I	V _{ss}	V _{dd}	V
Wide Temperature Type	Top	-20	+70	°C
	Tstg	-30	+80	°C

5. Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For Logic	V _{dd} -V _{ss}	-	-	5.0	-	V
Supply Voltage For LCD * Wide Temp、 Type	V _{dd} -V _o	* Ta=-20 °C	-	-	-	V
		Ta=0 °C	-	-	-	V
		Ta=25 °C	-	4.0	-	V
		Ta=50 °C	-	-	-	V
		* Ta=+70 °C	-	-	-	V
Input High Volt.	V _{IH}	-	2.2	-	V _{dd}	V
Input Low Volt.	V _{IL}	-	-	-	0.6	V
Output High Volt.	V _{OH}	-	2.4	-	-	V
Output Low Volt.	V _{OL}	-	-	-	0.4	V
Supply Current	I _{dd}	V _{dd} =5V	-	0.9	-	mA

6. Optical Characteristics

a. STN


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
View Angle	(V) °	CR ≥ 2	10		45	deg
	(H) °	CR ≥ 2	-30		30	deg
Contrast Ratio	CR	-		3		-
Response Time 25 °	T rise	-		100	150	ms
	T fall	-		150	200	ms

b. FSTN

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
View Angle	(V) °	CR ≥ 3	10		60	deg
	(H) °	CR ≥ 3	-45		45	deg
Contrast Ratio	CR	-		5		-
Response Time 25 °	T rise	-		100	150	ms
	T fall	-		150	200	ms


6.1 Definitions

□ View Angles

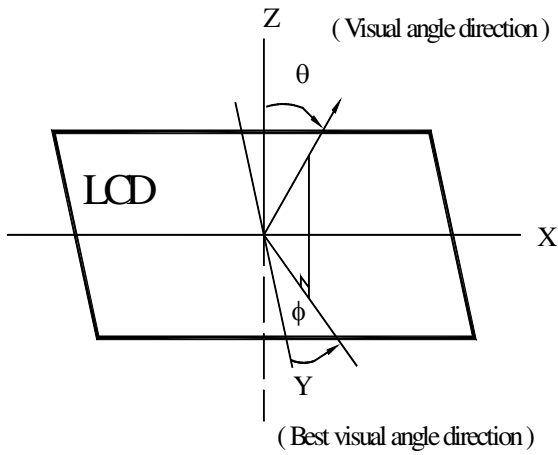


□ Contrast Ratio

$$CR = \frac{\text{Brightness at selected state (BS)}}{\text{Brightness at non-selected state (Bns)}}$$

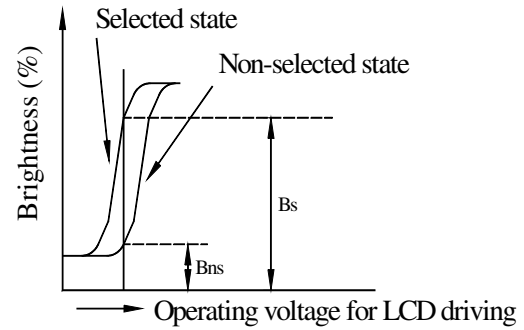

□ Response Time

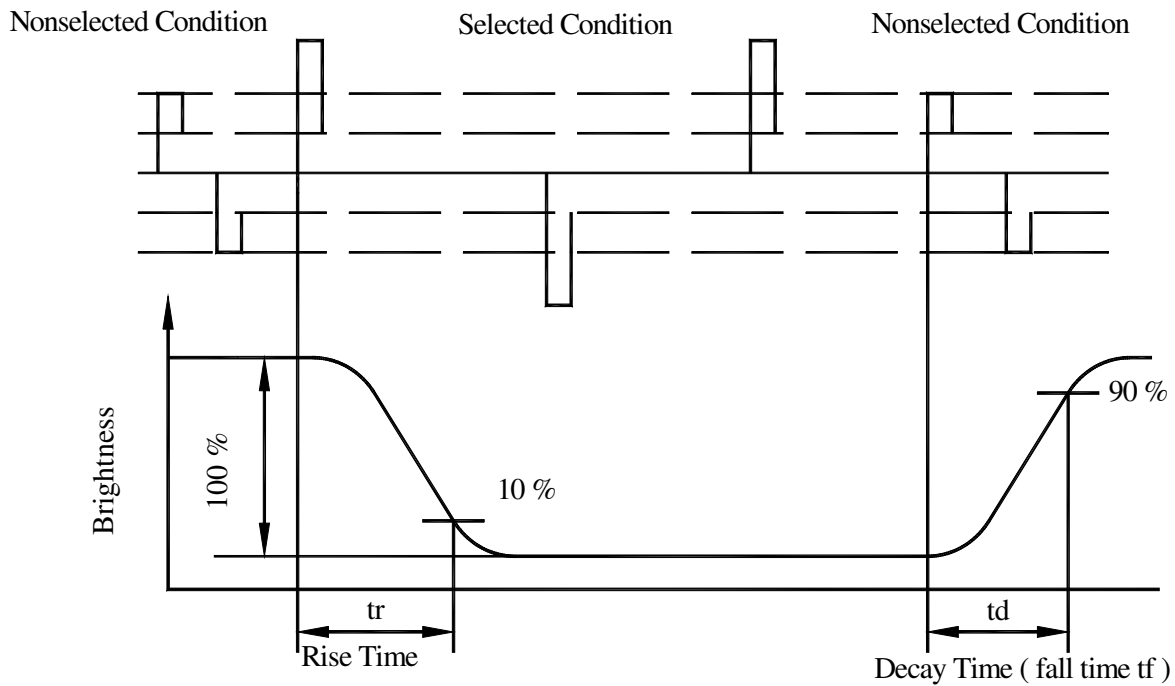


7. Interface Pin Function


Pin No.	Symbol	Level	Description
1	Vss	0V	Ground
2	Vdd	5.0V	Supply Voltage for logic (option +3V)
3	Vo	(Variable)	Operating voltage for LCD
4	RS	H/L	H:DATA, L:Instruction code
5	R/W	H/L	H:Read(MPU □ Module)L:Write(MPU □ Module)
6	E	H,H □ L	Chip enable signal
7	DB0	H/L	Data bit 0
8	DB1	H/L	Data bit 1
9	DB2	H/L	Data bit 2
10	DB3	H/L	Data bit 3
11	DB4	H/L	Data bit 4
12	DB5	H/L	Data bit 5
13	DB6	H/L	Data bit 6
14	DB7	H/L	Data bit 7
15	NC	-	No connection
16	NC	-	No connection
17	A	-	Power supply for LED backlight (+) /
18	K	-	Power supply for LED backlight (-)

8. Power Supply for LCD Module and LCD Operating Voltage a Adjustment

* Standard Type

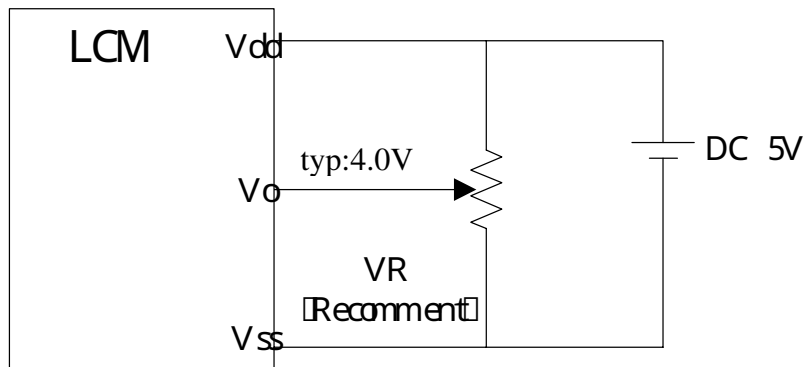

* (Option)LCM operating on " DC 3V " input , with external negative

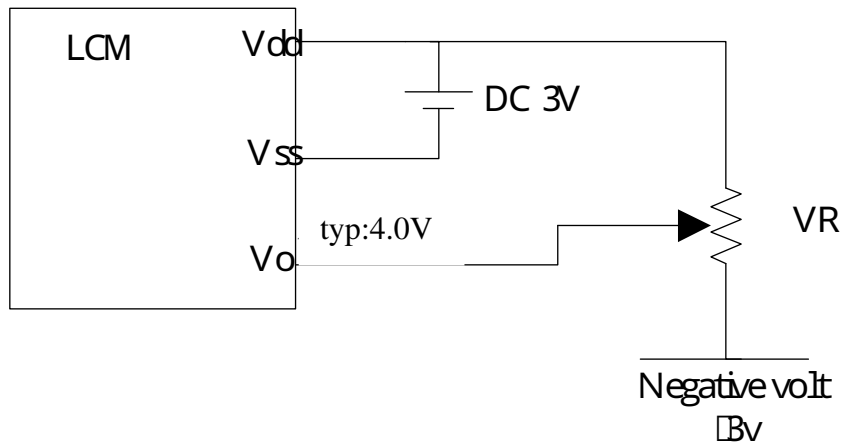

9.Backlight Information

9.1 Specification

(1) LED edge / white

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Supply Current	I _{LED}	□	45	-	mA	V=3.1V
Supply Voltage	V	2.9	3.1	3.3	V	
Reverse Voltage	V _R	-	-	5	V	
Surface Luminous*	I _V	-	45	-	cd/m ²	I _{LED} =45mA
Life Time		-	20000	-	Hr.	V □ 3.1 V
Color	White					

*Measured at the LCM (STN/gray LCD)

(2) LED array / yellow-green


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Supply Current	I _{LED}	□	150	-	mA	V=4.2V
Supply Voltage	V	4.0	4.2	4.4	V	
Reverse Voltage	V _R	-	-	10	V	
Surface Luminous*	I _V	-	40	-	cd/m ²	I _{LED} =150mA
Wave Length	□ p	-	574	-	nm	I _{LED} =150mA
Life Time		-	50000	-	Hr.	V □ 4.2V
Color	Yellow Green					

*Measured at the LCM (STN/gray LCD)


9.2 Backlight driving methods

a. LED B/L drive from pin17 (LED+) pin18 (LED-)

a.1 edge / white

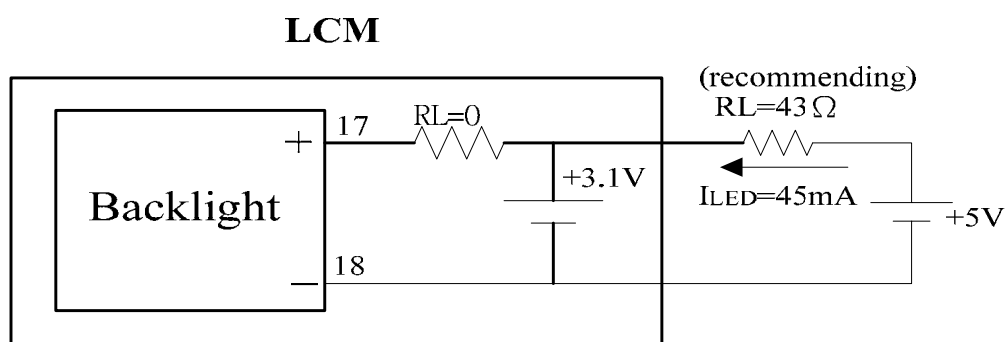


a.2 array / yellow-green

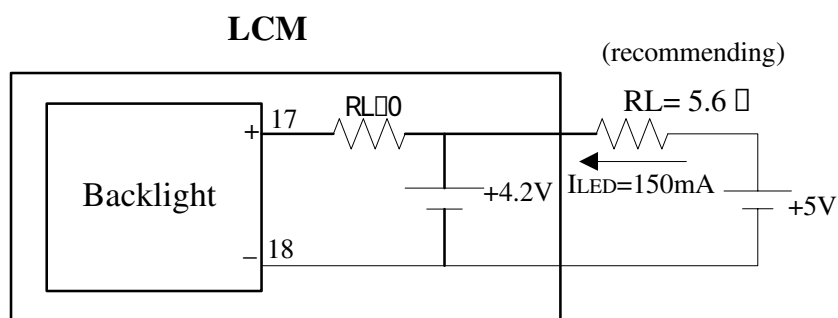


10. Quality Assurance

10.1 Inspection conditions

The LCD shall be inspected under 40W white fluorescent light.

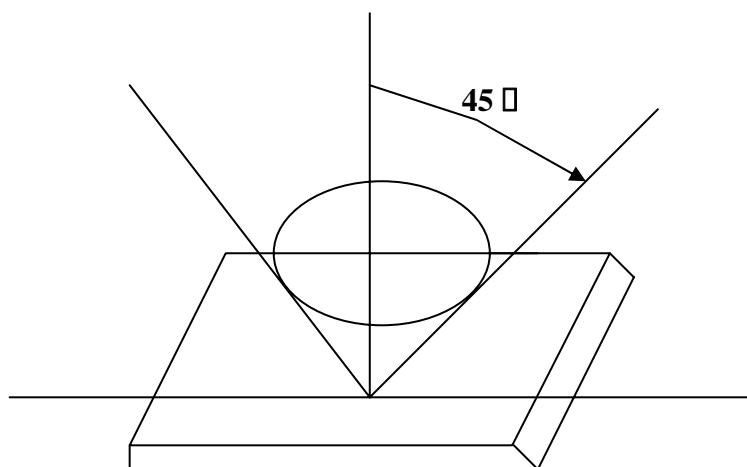

Definition of applicable Zones




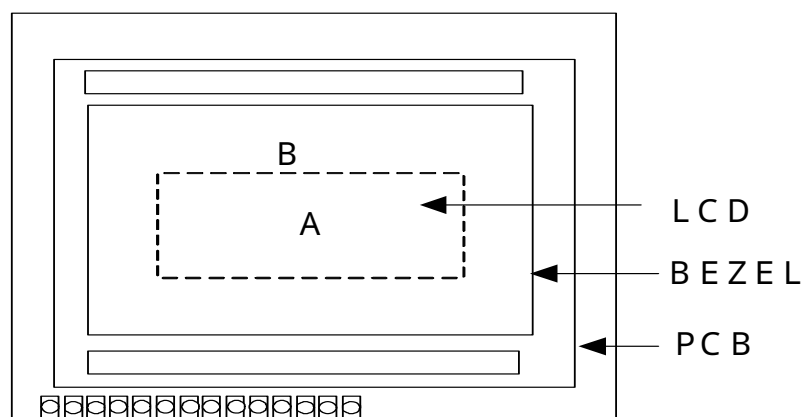


A Display Area

B Non-Display Area

10.2 Inspection Parameters

NO	Parameter	Criteria																										
1	Black or White spots	<table><tr><th rowspan="2">Zone Dimension</th><th colspan="2">Acceptable Number</th><th rowspan="2">Class Of Defects</th><th rowspan="2">Acceptable Level</th></tr><tr><th>A</th><th>B</th></tr><tr><td>D < 0.15</td><td>0</td><td>0</td><td rowspan="4">Minor</td><td rowspan="4">2.5</td></tr><tr><td>0.15 ≤ D < 0.2</td><td>4</td><td>4</td></tr><tr><td>0.2 ≤ D < 0.25</td><td>2</td><td>2</td></tr><tr><td>D ≥ 0.3</td><td>0</td><td>1</td></tr></table> D ≥ Long ≥ Short ≥ D is regard	Zone Dimension	Acceptable Number		Class Of Defects	Acceptable Level	A	B	D < 0.15	0	0	Minor	2.5	0.15 ≤ D < 0.2	4	4	0.2 ≤ D < 0.25	2	2	D ≥ 0.3	0	1					
Zone Dimension	Acceptable Number			Class Of Defects	Acceptable Level																							
	A	B																										
D < 0.15	0	0	Minor	2.5																								
0.15 ≤ D < 0.2	4	4																										
0.2 ≤ D < 0.25	2	2																										
D ≥ 0.3	0	1																										
2	Scratch/Substances	<table><tr><th colspan="2" rowspan="2">Zone X mm Y mm</th><th colspan="2">Acceptable Number</th><th rowspan="2">Class Of Defects</th><th rowspan="2">Acceptable Level</th></tr><tr><th>A</th><th>B</th></tr><tr><td>0</td><td>0.04 W</td><td>0</td><td>0</td><td rowspan="4">Minor</td><td rowspan="4">2.5</td></tr><tr><td>3.0 L</td><td>0.06 W</td><td>4</td><td>4</td></tr><tr><td>2.0 L</td><td>0.08 W</td><td>2</td><td>3</td></tr><tr><td>-</td><td>0.1 < W</td><td>0</td><td>1</td></tr></table> X ≥ Length Y ≥ Width D is regard Total defects should not exceed 4/module	Zone X mm Y mm		Acceptable Number		Class Of Defects	Acceptable Level	A	B	0	0.04 W	0	0	Minor	2.5	3.0 L	0.06 W	4	4	2.0 L	0.08 W	2	3	-	0.1 < W	0	1
Zone X mm Y mm		Acceptable Number			Class Of Defects	Acceptable Level																						
		A	B																									
0	0.04 W	0	0	Minor	2.5																							
3.0 L	0.06 W	4	4																									
2.0 L	0.08 W	2	3																									
-	0.1 < W	0	1																									
3	Air Bubbles between glass & polarizer	<table><tr><th rowspan="2">Zone Dimension</th><th colspan="2">Acceptable Number</th><th rowspan="2">Class Of Defects</th><th rowspan="2">Acceptable Level</th></tr><tr><th>A</th><th>B</th></tr><tr><td>D ≥ 0.15</td><td>0</td><td>0</td><td rowspan="3">Minor</td><td rowspan="3">2.5</td></tr><tr><td>0.15 < D ≥ 0.25</td><td>2</td><td>0</td></tr><tr><td>0.25 < D</td><td>0</td><td>1</td></tr></table> D is regard Total defects shall not excess 3/module	Zone Dimension	Acceptable Number		Class Of Defects	Acceptable Level	A	B	D ≥ 0.15	0	0	Minor	2.5	0.15 < D ≥ 0.25	2	0	0.25 < D	0	1								
Zone Dimension	Acceptable Number			Class Of Defects	Acceptable Level																							
	A	B																										
D ≥ 0.15	0	0	Minor	2.5																								
0.15 < D ≥ 0.25	2	0																										
0.25 < D	0	1																										

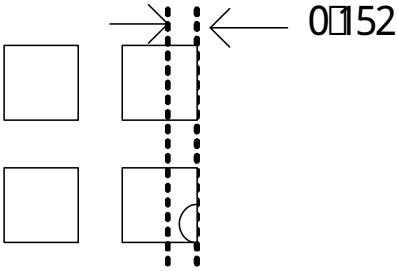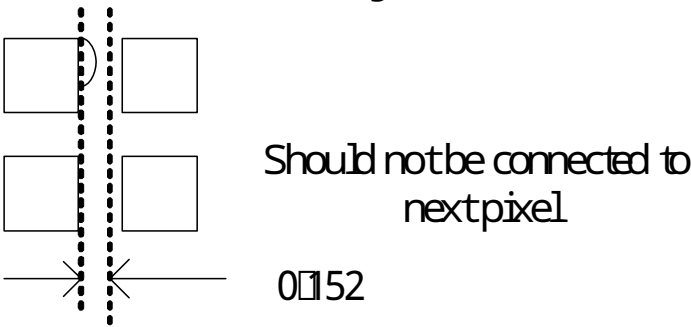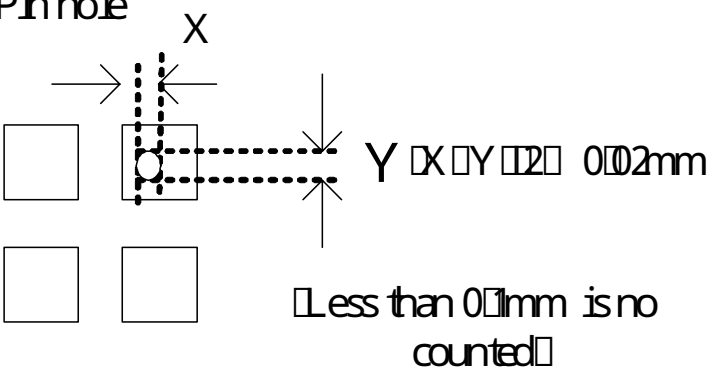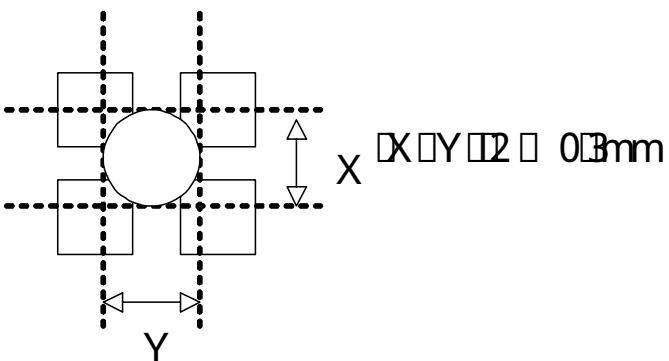4	Uniformity	1 Pixel shape With Dent  2 Pixel shape With Projection  3 Pin hole  4 Deformation  Total acceptable number 1 pixel 1 cell
---	------------	---


11. Reliability

□ Content of Reliability Test

Environmental Test				
No.	Test Item	Content of Test	Test Condition	Applicable Standard
1	High Temperature storage	Endurance test applying the high storage temperature for a long time.	80 □ 96hrs	—
2	Low Temperature storage	Endurance test applying the high storage temperature for a long time.	-30 □ 96hrs	—
3	High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70 □ 96hrs	—
4	Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20 □ 96hrs	—
5	Humidity Test	Endurance test applying the high humidity storage for a long time.	40 □ ,90%RH 96hrs	—
6	Thermal Shock Test	Endurance test applying the low and high temperature cycle. -30 □ 25 □ 80 □ $\longleftrightarrow$ 30min 5min 30min 1 cycle	-30 □ / 80 □ 5 cycles	—
7	Vibration test	Endurance test applying the vibration during transportation and using.	Total Fixed Amplitude:1.5mm Vibration Frequency :10~55Hz One cycle 60 seconds to 3 direction of X,Y,Z for each 15minutes	—

12. Appendix (Drawing , ST7066U controller data)

12-1 Drawing

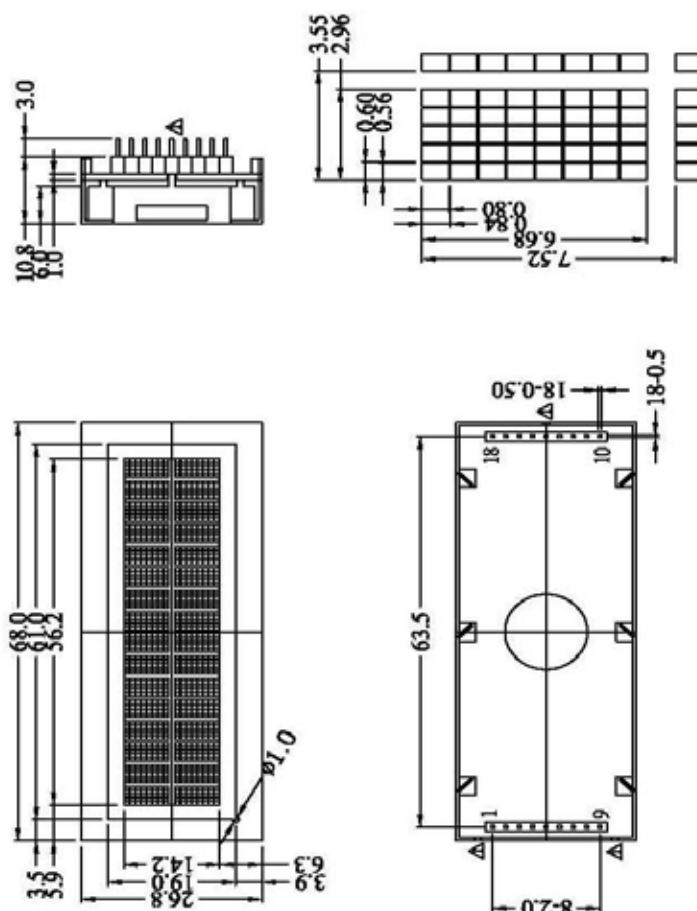

DETAIL A
SCALE : 5X

The non-specified tolerance of dimension is ± 0.2 mm .

PIN NO.	SYMBOL	PIN NO.	SYMBOL
1	VSS	10	D3
2	VDD	11	D4
3	VEE	12	D5
4	RS	13	D6
5	R/W	14	D7
6	E	15	NC
7	D0	16	NC
8	D1	17	LED(+)
9	D2	18	LED(-)

SCALE: 1/1	REV: 01	寶麗明有限公司 BOLYMIN, INC.	
UNIT: mm	PAGE: 1/1	MODEL BC1602L	
APPROVE		TITLE LCM DRAWING	
CHECK		DWG NO. LE-970122	
DRAW	Beck 08/06/23		

12-2. ST7066U controller data

12-2.1 Function description

The LCD display Module is built in a LSI controller, the controller has two 8-bit registers, an instruction register (IR) and a data register (DR).

The IR stores instruction codes, such as display clear and cursor shift, and address information for display data RAM (DDRAM) and character generator (CGRAM). The IR can only be written from the MPU. The DR temporarily stores data to be written or read from DDRAM or CGRAM. When address information is written into the IR, then data is stored into the DR from DDRAM or CGRAM. By the register selector (RS) signal, these two registers can be selected.

RS	R/W	Operation
0	0	IR write as an internal operation (display clear, etc.)
0	1	Read busy flag (1 address counter (DB0 to DB7)
1	0	Write data to DI CGRAM (DR to DDRAM or CGRAM)
1	1	Read data from or CGRAM (DDRAM or CGRAM to DR)

Busy Flag (BF)


When the busy flag is 1, the controller LSI is in the internal operation mode, and the next instruction will not be accepted. When RS=0 and R/W=1, the busy flag is output to DB7. The next instruction must be written after ensuring that the busy flag is 0.

Address Counter (AC)

The address counter (AC) assigns addresses to both DDRAM and CGRAM

Display Data RAM (DDRAM)

This DDRAM is used to store the display data represented in 8-bit character codes. Its extended capacity is 80 B bits or 80 characters. Below figure is the relationship between DDRAM addresses and positions on the liquid crystal display.

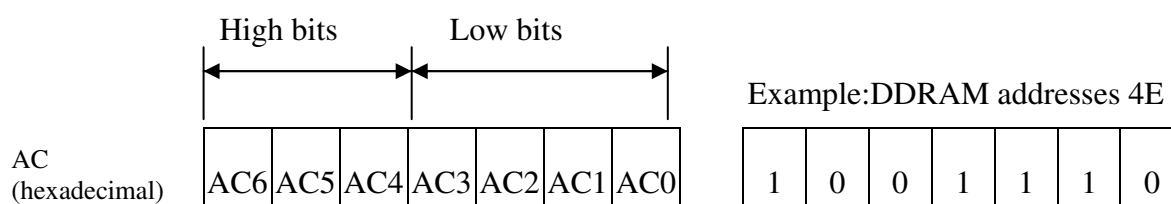

DDRAM Address

Display position DDRAM address

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F

Example: 2-Line by 16-Character Display

Character Generator ROM (CGROM)

The CGROM generate 5 × dot or 5 × 10 dot character patterns from 8-bit character codes. See Table 2.




Character Generator RAM (CGRAM)

In CGRAM, the user can rewrite character by program. For 5 × dots, eight character patterns can be written, and for 5 × 10 dots, four character patterns can be written.

Write into DDRAM the character code at the addresses shown as the left column of table 1. To show the character patterns stored in CGRAM.

Relationship between CGRAM Addresses, Character Codes (DDRAM) and Character Patterns (CGRAM Data)

For 5 * 8 dot character patterns

Character Codes (DDRAM data)								CGRAM Address								Character Patterns (CGRAM data)							
7	6	5	4	3	2	1	0									7	6	5	4	3	2	1	0
High				Low												High				Low			
0 0 0 0 * 0 0 0								0 0 0				0	0	0					0				
												0	0	1					0	0	0		
												0	1	0					0	0	0		
												0	1	1					0	0	0		
												1	0	0					0	0	0		
												1	0	1					0	0	0		
												1	1	0					0	0	0		
												1	1	1					0	0	0		
												0	0	0					0	0	0		
												0	0	1					0	0	0		
												0	1	0					0	0	0		
0 0 0 0 * 0 0 1								0 0 1				0	1	1					0				
												1	0	0					0	0	0		
												1	0	1					0	0	0		
												1	1	0					0	0	0		
												1	1	1					0	0	0		
												0	0	0					0				
												0	0	1					0	0	0		
0 0 0 0 * 1 1 1								1 1 1				1	0	0									
												1	0	1									
												1	1	0									
												1	1	1									
												*	*	*									

Character pattern(1)

Cursor pattern

Character pattern(2)

Cursor pattern

For 5 * 10 dot character patterns

Character Codes (DDRAM data)								CGRAM Address								Character Patterns (CGRAM data)							
7	6	5	4	3	2	1	0									7	6	5	4	3	2	1	0
High				Low												High				Low			
0 0 0 0 * 0 0 0								0 0															

Character pattern

Cursor pattern

■ : " High "

12-2.2 C.G ROM table. table 2

Code J: English – Japanese Font

Upper 4 bit Lower 4 bit	LLLL	LLLH	LLHL	LLHH	LHLL	LHLH	LHHL	LHHH	HLLL	HLLH	HLHL	HLHH	HHLL	HHLH	HHHL	HHHH
LLLL	CG RAM (1)			0	1	2	3	4					5	6	7	8
LLLH	(2)		9	A	B	C	D	E					F	G	H	I
LLHL	(3)		J	K	L	M	N	O					P	Q	R	S
LLHH	(4)		T	U	V	W	X	Y					Z	a	b	c
LHLL	(5)		d	e	f	g	h	i					j	k	l	m
LHLH	(6)		n	o	p	q	r	s					t	u	v	w
LHHL	(7)		x	y	z	A	B	C					D	E	F	G
LHHH	(8)		H	I	J	K	L	M					N	O	P	Q
HLLL	(1)		R	S	T	U	V	W					X	Y	Z	a
HLLH	(2)		b	c	d	e	f	g					h	i	j	k
HLHL	(3)		l	m	n	o	p	q					r	s	t	u
HLHH	(4)		v	w	x	y	z	A					B	C	D	E
HHLL	(5)		F	G	H	I	J	K					L	M	N	O
HHLH	(6)		P	Q	R	S	T	U					V	W	X	Y
HHHL	(7)		Z	a	b	c	d	e					f	g	h	i
HHHH	(8)		j	k	l	m	n	o					p	q	r	s

Code E: English - European Font

Upper 4 bit Lower 4 bit	LLLL	LL LH	LL HL	LL HH	LH LL	LH LH	LH HL	LH HH	HLLL	HLLH	HL HL	HL HH	HH LL	HH LH	HH HL	HH HH
LLLL	CG RAM (1)															
LL LH	CG RAM (2)															
LL HL	CG RAM (3)															
LL HH	CG RAM (4)															
LH LL	CG RAM (5)															
LH LH	CG RAM (6)															
LH HL	CG RAM (7)															
LH HH	CG RAM (8)															
HLLL	CG RAM (1)															
HLLH	CG RAM (2)															
HL HL	CG RAM (3)															
HL HH	CG RAM (4)															
HH LL	CG RAM (5)															
HHLH	CG RAM (6)															
HH HL	CG RAM (7)															
HH HH	CG RAM (8)															

Code C: English - Cyrillic Font


Upper 4 bit Lower 4 bit	LLLL	LLHH	LLHL	LLHH	LHLL	LHLH	LHHL	LHHH	HLLL	HLLH	HLHL	HLHH	HHLL	HHHL	HHHH
LLLL	CG RAM (1)			00P`P							BH4.24				
LLHH	CG RAM (2)		!	1A0a9							79w.04				
LLHL	CG RAM (3)		"	2BRbr							E6k.u04				
LLHH	CG RAM (4)		#	3CScs							Hewu.24				
LHLL	CG RAM (5)		\$	4DTdt							Brk.44				
LHLH	CG RAM (6)		%	5ELeu							H609u`				
LHHL	CG RAM (7)		&	6Fufv							AHh0?uy4				
LHHH	CG RAM (8)		?	7Gw9u							JG9aI`E				
HLLL	CG RAM (1)		<	8Hhx							Nw.c00				*
HLLH	CG RAM (2)		>	9IY1u							Y0a>†~4				5
HLHL	CG RAM (3)		*	JZz							0K.c.d44				9
HLHH	CG RAM (4)		+	KLk0							4g"444				*
HHLL	CG RAM (5)		.	L41E							U4N44404				4
HHHL	CG RAM (6)		-	MImE							b4c4440				0
HHHL	CG RAM (7)		.	Nne4							U4n44404				0
HHHH	CG RAM (8)		/	Ooe							Ore.404				4

12-2.3 Instruction table

Instruction	Instruction Code										Description	Execution time (fosc=270Khz)
	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0		
Clear Display	0	0	0	0	0	0	0	0	0	1	Write "00H" to DDRAM and set DDRAM address to "00H" from AC	1.52ms
Return Home	0	0	0	0	0	0	0	0	1	-	Set DDRAM address to "00H" from AC and return cursor to its original position if shifted. The contents of DDRAM are not changed.	1.52ms
Entry Mode Set	0	0	0	0	0	0	0	1	I/D	SH	Assign cursor moving direction and enable the shift of entire display.	37 μ s
Display ON/OFF Control	0	0	0	0	0	0	1	D	C	B	Set display (D), cursor (C), and blinking of cursor (B) on/off control bit.	37 μ s
Cursor or Display Shift	0	0	0	0	0	1	S/C	R/L	-	-	Set cursor moving and display shift control bit, and the direction, without changing of DDRAM data.	37 μ s
Function Set	0	0	0	0	1	DL	N	F	-	-	Set interface data length (DL:8-bit/4-bit), numbers of display line (N:2-line/1-line)and, display font type (F:5 μ 1 dots/5 μ 8 dots)	37 μ s
Set CGRAM Address	0	0	0	1	AC5	AC4	AC3	AC2	AC1	AC0	Set CGRAM address in address counter.	37 μ s
Set DDRAM Address	0	0	1	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Set DDRAM address in address counter.	37 μ s
Read Busy Flag and Address	0	1	BF	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read.	0 μ s
Write Data to RAM	1	0	D7	D6	D5	D4	D3	D2	D1	D0	Write data into internal RAM (DDRAM/CGRAM).	37 μ s
Read Data from RAM	1	1	D7	D6	D5	D4	D3	D2	D1	D0	Read data from internal RAM (DDRAM/CGRAM).	37 μ s

12-4.4 Timing characteristics


12-2.4.1 Write Operation

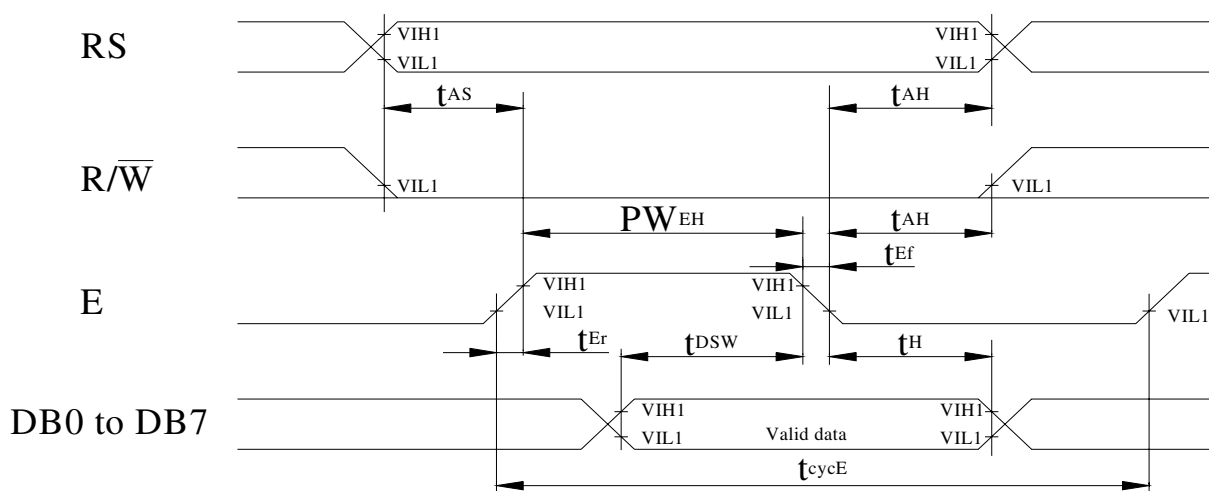

$T_a = 25^\circ\text{C}$, $V_{dd} = 5.0 \pm 0.5\text{V}$

Item	Symbol	Min	Typ	Max	Unit
Enable cycle time	t_{cycE}	1200	-	-	ns
Enable pulse width (high level)	PW_{EH}	140	-	-	ns
Enable rise/fall time	t_{Er}, t_{Ef}	-	-	25	ns
Address set-up time (RS, R/W to E)	t_{AS}	0	-	-	ns
Address hold time	t_{AH}	10	-	-	ns
Data set-up time	t_{DSW}	40	-	-	ns
Data hold time	t_{H}	10	-	-	ns

12-4.4.2 Read Operation

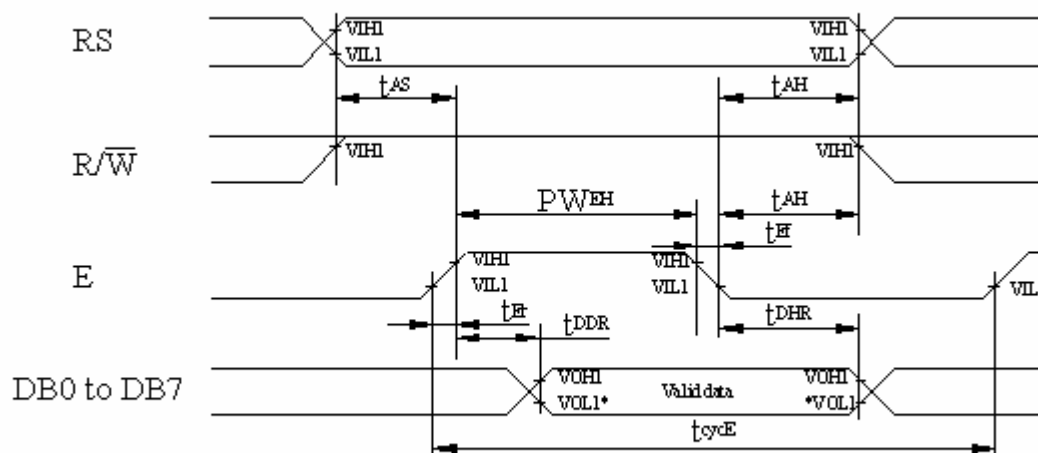


$T_a=25^{\circ}\text{C}$, $V_{dd}=5.0\text{V}$

Item	Symbol	Min	Typ	Max	Unit
Enable cycle time	t_{cycE}	1200	-	-	ns
Enable pulse width (high level)	PW_{EH}	140	-	-	ns
Enable rise/fall time	t_{Er}, t_{Ef}	-	-	25	ns
Address set-up time (RS, R/W to E)	t_{AS}	0	-	-	ns
Address hold time	t_{AH}	10	-	-	ns
Data delay time	t_{DDR}	-	-	100	ns
Data hold time	t_{DHR}	10	-	-	ns

12-5.5 Initializing soft ware of LCM

12-5.5.1 8-bit interface

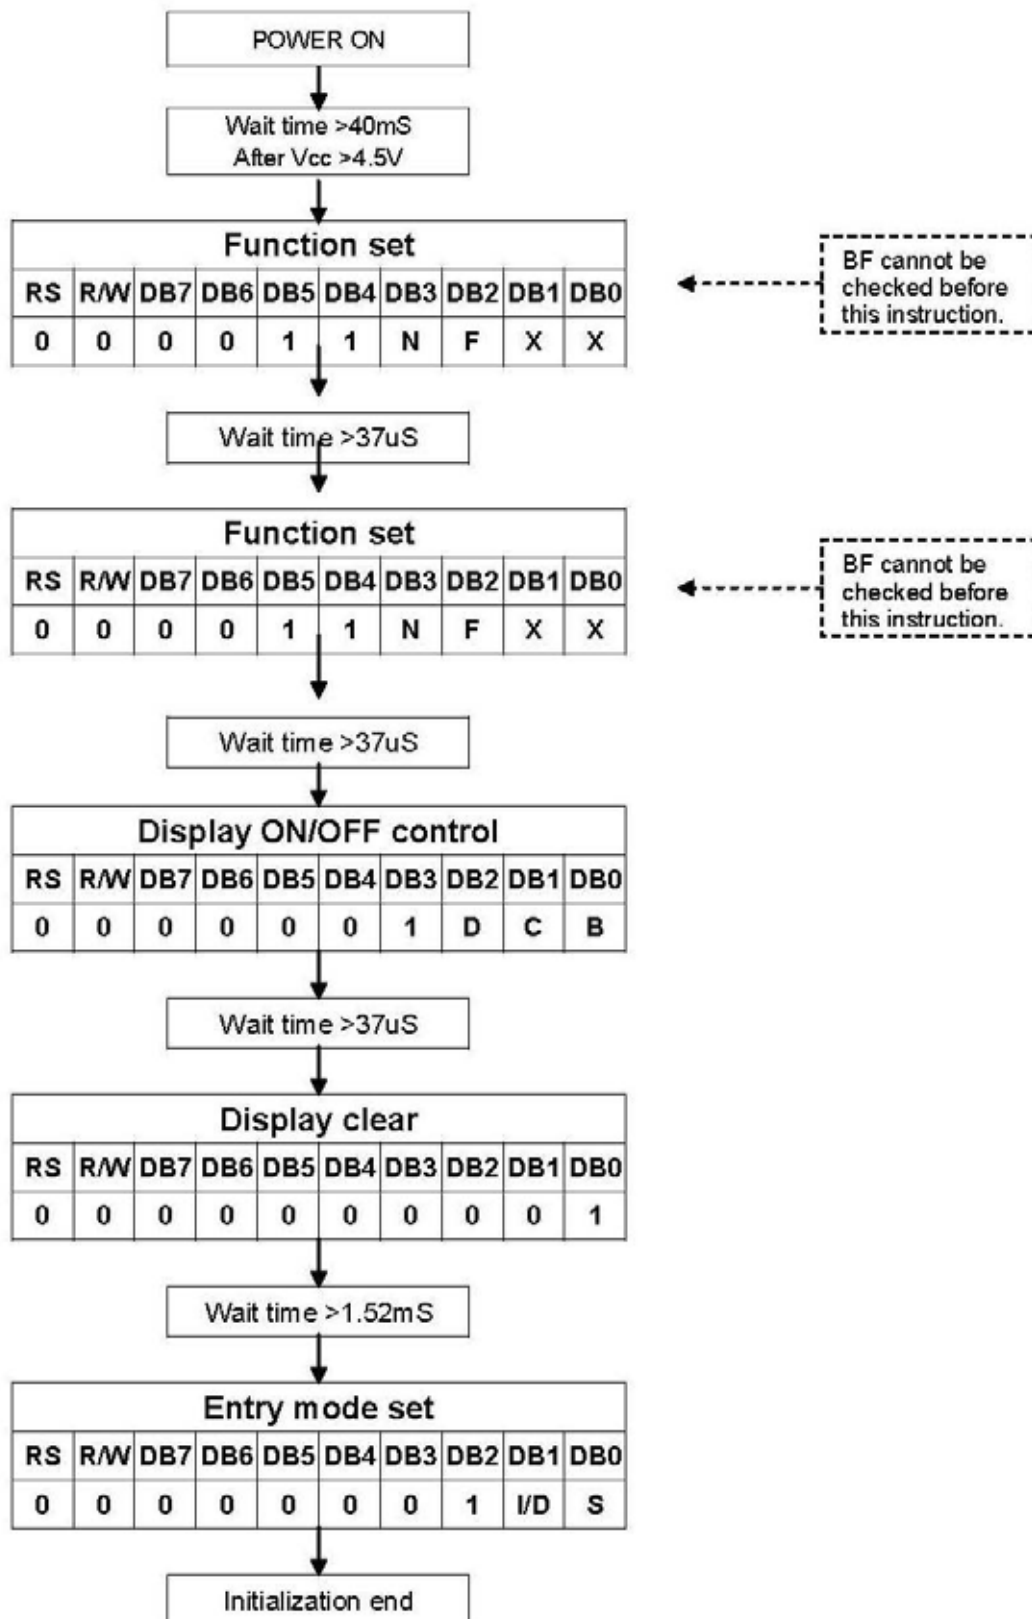

12-5.5.2 4-bit interface

