



EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.




MIDI VAL® BLADE TYPE FUSE

MidiVAL® fuses are compliant with ISO 8820-5 Standard, applicable to automotive bolt-on Fuses. They allow space reduction compared to MegaVAL® for high current wiring protection. The operating features are characterized by strong time delay characteristics. MidiVAL® are made of Zinc alloy, a good choice to avoid high temperatures inside the box..

Breaking capacity: 2000[A]
Voltage rating: 32[Vdc]
Ambient temperature: -40°C to +125°C



MTA/ISO MidiVAL® operating time limits		
% I _N	min [s]	max [s]
100	360000	-
110	14400	-
150	90	3600
200	3	100
300	0,3	3
500	0,1	1

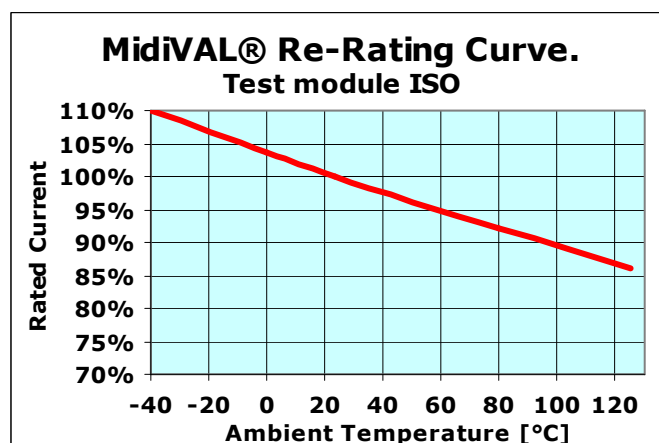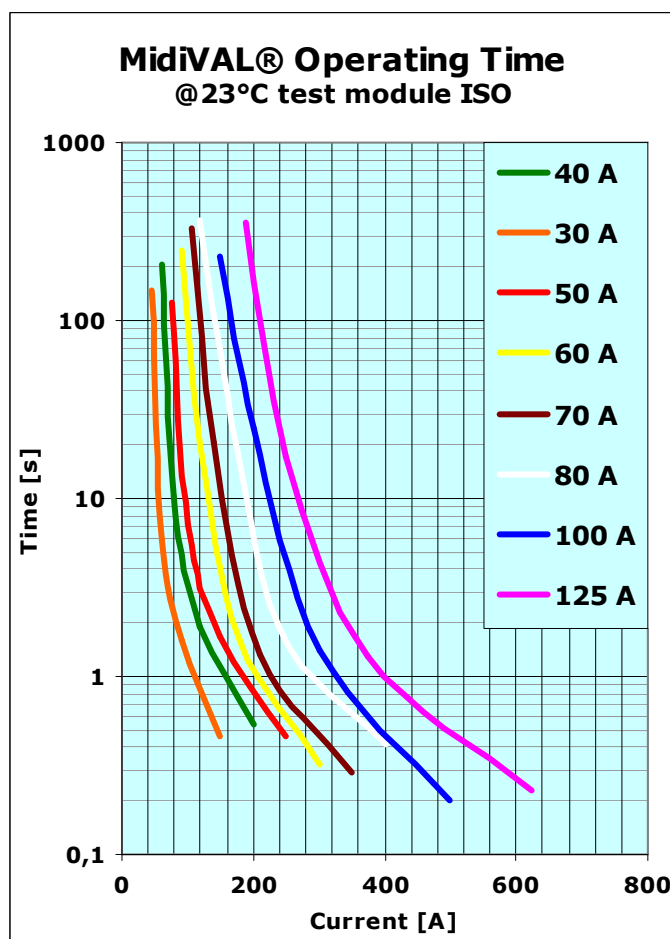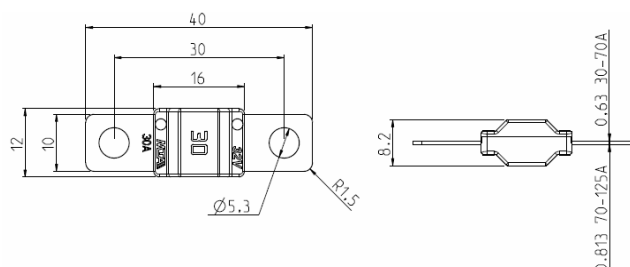

CURRENT RATING [A]	VOLTAGE DROP @ current rating [mV]	CABLE SIZE [mm ²]	I ² t
30	80,5	2,5	10523
40	70,9	4,0	18929
50	74,2	6,0	26320
60	60,5		30804
70	68,2	10,0	26728
80	66,0		56298
100	63,7	16,0	34524
125	62,0	25,0	48601