




**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

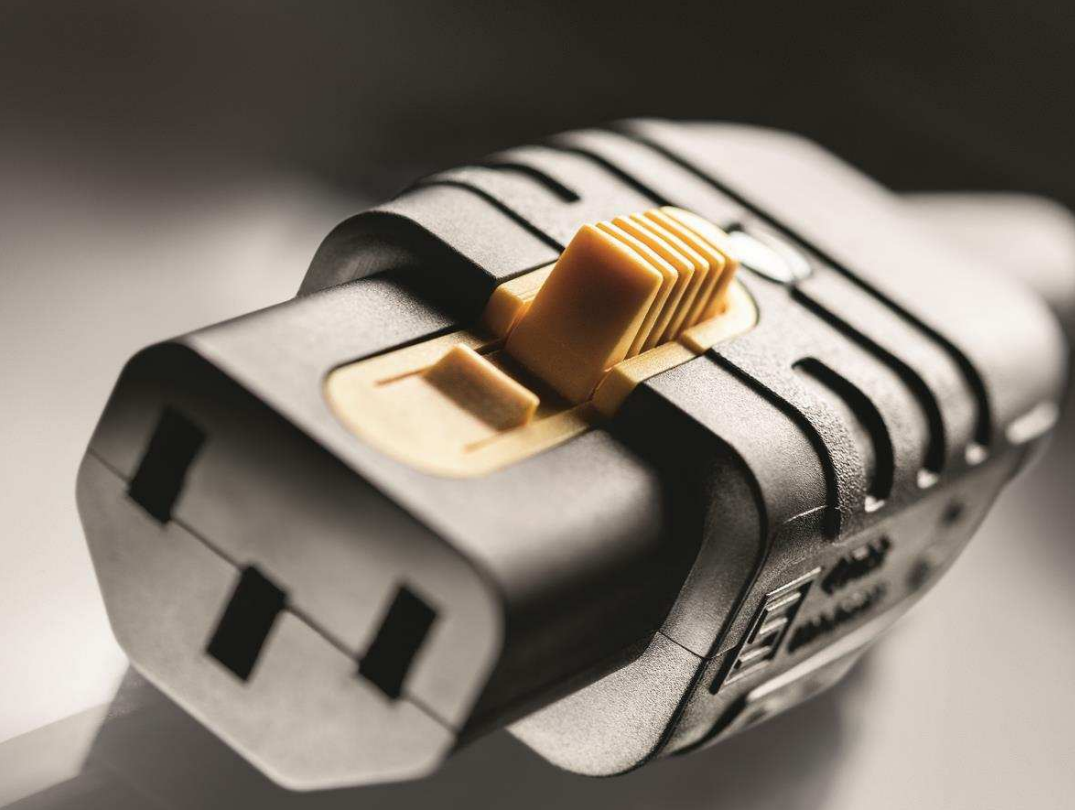

First Rewireable Cord Connector with V-Lock  
Cord Retention

## 4783

Rewireable Cord Connector  
IEC 60320 C13

- > First Rewireable V-Lock Cord Connector
- > Black, Grey or White
- > Ideal for low volume builds
- > Ergonomic and modern design
- > Halogen free



# SCHURTER presents the 1<sup>st</sup> rewireable V-Lock World Wide – Type 4783

- > Why rewireable cord connectors?
  - > Small Series builds
  - > Flexible cable lengths and country specific plugs
  - > **Reusable**
- > Why cord/plug retention?
  - > **Prevent unintentional removal of power**
  - > Medical technology
  - > Data and Information technology
- > Why V-Lock retention?
  - > **Proven**
  - > Professional
  - > Secure



**SCHURTER** is worldwide the first company that can deliver a product of this combination!

... and welcomes the New 4783 in the large portfolio of rewirable connectors here at **SCHURTER**



# SCHURTER presents the 1<sup>st</sup> rewireable V-Lock World Wide – Type 4783



- > Locking **compatibility** with all SCHURTER V-Lock receiving C14 inlets [35+ Products and growing]
- > **Colors** available in Black, Grey and White
- > Factory mounted cable guard included for **8.5 mm or 10 mm cable Ø**
- > Screw terminals for wire cross sections min. 3 x **0.75 mm<sup>2</sup>/18AWG (0.82mm<sup>2</sup>)** to max. 3 x **1.5 mm<sup>2</sup>/14AWG (2.08mm<sup>2</sup>)**
- > Rated current  
**250 VAC 10 A** (IEC and CCC) and  
**125 VAC 15 A** (UL and CSA)
- > European, USA and Chinese Approvals

# Order Information – Type 4783: 1<sup>st</sup> Rewireable V-Lock World Wide




Color	Cable Guard Ø	Part Number	MOQ
Black	8.5 mm	3-122-073	50 pcs
Black	10 mm	3-122-074	50 pcs

Color	Cable Guard Ø	Part Number	MOQ
Grey	8.5 mm	3-122-075	50 pcs
Grey	10 mm	3-122-076	50 pcs

Color	Cable Guard Ø	Part Number	MOQ
White	8.5 mm	3-122-077	50 pcs
White	10 mm	3-122-078	50 pcs

# Dimensions – Type 4783: 1<sup>st</sup> Rewireable V-Lock World Wide

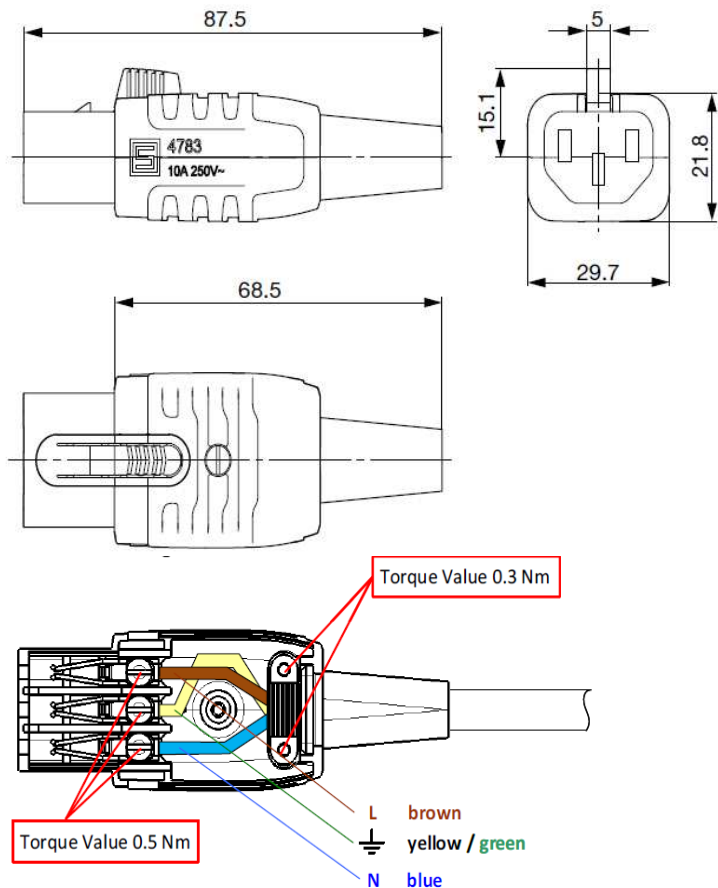

	IEC	UL
Cable Type	H05W-F	SVT, SJT
Cable Diameter min	Ø 7.6 mm	Ø 7.7 mm
Cable Diameter max	Ø 9.4 mm	Ø 9.5 mm
Wire Size min	3x0.75mm <sup>2</sup>	3xAWG18 (0.82mm <sup>2</sup> )
Wire Size max	3x1.50mm <sup>2</sup>	3xAWG14 (2.08mm <sup>2</sup> )

## Additional Information

- > 4783 data sheet [\[- Link -\]](#)
- > 4783 compatible SCHURTER Products [\[- Link -\]](#)
- > Landing Page V-Lock [\[- Link -\]](#)
- > White Paper Cord Retention [\[- Link -\]](#)
- > **SCHURTER** Rewireable Connector Portfolio [\[- Link -\]](#)
  
- > Click on [Partner Services](#) to download:
  - > Latest press releases
  - > Training presentations
  - > Price list
  
- > For further questions please contact [your local SCHURTER sales contact](#)