




HESTORE.HU
elektronikai alkatrész áruház

EN: This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

FEATURES

- Output current in excess of 1.5A
- Fixed output voltage of 5V, 6V, 8V, 9V, 10V, 12V, 15V, 18V and 24V available
- Internal thermal overload protection
- Output transition Safe-Area compensation

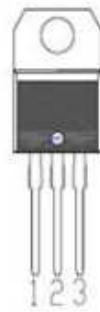

PIN1 : IN
 PIN 2 : GND
 PIN 3 : OUT

ABSOLUTE MAXIMUM RATINGS

(Operating temperature range applies unless otherwise specified)

| PARAMETER | SYMBOL | RATING | UNIT |
|---|--------|--------------------|--------|
| Input voltage(for $V_o=5\sim 18V$) (for $V_o=24V$) | V_I | 35 40 | V V |
| Output Current | I_o | 1 | A |
| Power Dissipation | PD | Internally Limited | W |
| Operating Junction Temperature Range | TOPR | -20~150 | °C |
| Storage Temperature Range | TSTG | -55~150 | °C |

L7805CV ELECTRICAL CHARACTERISTICS

($V_I=10V$, $I_o=0.5A$, $T_j=0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------------------------|-----------------------|--|------|------|------|----------------|
| Output Voltage | V_o | $T_j=25^{\circ}C$, $I_o=5mA - 1.0A$ | 4.80 | 5.0 | 5.20 | V |
| | | $V_I = 7.5V$ to $20V$, $I_o=5mA - 1.0A$, $PD < 15W$ | 4.75 | | 5.25 | V |
| Load Regulation | ΔV_o | $T_j=25^{\circ}C$, $I_o=5mA - 1.5A$ | | | 50 | mV |
| | | $T_j=25^{\circ}C$, $I_o=0.25A - 0.75A$ | | | 25 | mV |
| Line regulation | ΔV_o | $V_I = 7V$ to $25V$, $T_j=25^{\circ}C$ | | | 50 | mV |
| | | $V_I = 7.5V$ to $20V$, $T_j=25^{\circ}C$, $I_o=1A$ | | | 50 | mV |
| Quiescent Current | I_q | $T_j=25^{\circ}C$, $I_o=<1A$ | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | $V_I = 7.5V$ to $20V$ | | | 1.0 | mA |
| | ΔI_q | $I_o=5mA - 1.0A$ | | | 0.5 | mA |
| Output Noise Voltage | V_N | $10Hz \leq f \leq 100kHz$ | | 40 | | μV |
| Temperature coefficient of V_o | $\Delta V_o/\Delta T$ | $I_o=5mA$ | | -0.6 | | $mV/^{\circ}C$ |
| Ripple Rejection | RR | $V_I = 8V - 18V$, $f=120Hz$, $T_j=25^{\circ}C$ | 62 | 80 | | dB |
| Peak Output Current | I_{PK} | $T_j=25^{\circ}C$ | | 1.8 | | A |
| Short-Circuit Current | I_{SC} | $V_I=35V$, $T_j=25^{\circ}C$ | | 250 | | mA |
| Dropout Voltage | V_d | $T_j=25^{\circ}C$ | | 2.0 | | V |

L7806CV ELECTRICAL CHARACTERISTICS

($V_I=11V$, $I_O=0.5A$, $T_j = 0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------------------------|-----------------------|--|------|------|------|----------------|
| Output Voltage | V_o | $T_j=25^{\circ}C$, $I_o=5mA - 1.0A$ | 5.76 | 6.0 | 6.24 | V |
| | | $V_I = 8.5V$ to $21V$, $I_o=5mA - 1.0A$, $PD<15W$ | 5.70 | | 6.30 | V |
| Load Regulation | ΔV_o | $T_j=25^{\circ}C$, $I_o=5mA - 1.5A$ | | | 60 | mV |
| | | $T_j=25^{\circ}C$, $I_o=0.25A - 0.75A$ | | | 30 | mV |
| Line regulation | ΔV_o | $V_I = 8V$ to $25V$, $T_j=25^{\circ}C$ | | | 60 | mV |
| | | $V_I = 8.5V$ to $21V$, $T_j=25^{\circ}C$, $I_o=1A$ | | | 60 | mV |
| Quiescent Current | I_q | $T_j=25^{\circ}C$, $I_o=<1A$ | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | $V_I = 8.5V$ to $21V$ | | | 1.0 | mA |
| | ΔI_q | $I_o=5mA - 1.0A$ | | | 0.5 | mA |
| Output Noise Voltage | V_N | $10Hz \leq f \leq 100kHz$ | | 45 | | μV |
| Temperature coefficient of V_o | $\Delta V_o/\Delta T$ | $I_o=5mA$ | | -0.7 | | $mV/^{\circ}C$ |
| Ripple Rejection | RR | $V_I = 9V - 19V$, $f=120Hz$, $T_j=25^{\circ}C$ | 59 | 75 | | dB |
| Peak Output Current | I_{PK} | $T_j=25^{\circ}C$ | | 1.8 | | A |
| Short-Circuit Current | I_{SC} | $V_I=35V$, $T_j=25^{\circ}C$ | | 250 | | mA |
| Dropout Voltage | V_d | $T_j=25^{\circ}C$ | | 2.0 | | V |

L7808CV ELECTRICAL CHARACTERISTICS

($V_I=14V$, $I_O=0.5A$, $T_j = 0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|----------------------------------|-----------------------|---|------|------|------|----------------|
| Output Voltage | V_o | $T_j=25^{\circ}C$, $I_o=5mA - 1.0A$ | 7.68 | 8.0 | 8.32 | V |
| | | $V_I = 10.5V$ to $23V$, $I_o=5mA - 1.0A$, $PD<15W$ | 7.60 | | 8.40 | V |
| Load Regulation | ΔV_o | $T_j=25^{\circ}C$, $I_o=5mA - 1.5A$ | | | 80 | mV |
| | | $T_j=25^{\circ}C$, $I_o=0.25A - 0.75A$ | | | 40 | mV |
| Line regulation | ΔV_o | $V_I = 10.5V$ to $25V$, $T_j=25^{\circ}C$ | | | 80 | mV |
| | | $V_I = 10.5V$ to $23V$, $T_j=25^{\circ}C$, $I_o=1A$ | | | 80 | mV |
| Quiescent Current | I_q | $T_j=25^{\circ}C$, $I_o=<1A$ | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | $V_I = 10.5V$ to $23V$ | | | 1.0 | mA |
| | ΔI_q | $I_o=5mA - 1.0A$ | | | 0.5 | mA |
| Output Noise Voltage | V_N | $10Hz \leq f \leq 100kHz$ | | 58 | | μV |
| Temperature coefficient of V_o | $\Delta V_o/\Delta T$ | $I_o=5mA$ | | -0.9 | | $mV/^{\circ}C$ |
| Ripple Rejection | RR | $V_I = 11.5V$ to $21.5V$, $f=120Hz$, $T_j=25^{\circ}C$ | 56 | 72 | | dB |
| Peak Output Current | I_{PK} | $T_j=25^{\circ}C$ | | 1.8 | | A |
| Short-Circuit Current | I_{SC} | $V_I=35V$, $T_j=25^{\circ}C$ | | 250 | | mA |
| Dropout Voltage | V_d | $T_j=25^{\circ}C$ | | 2.0 | | V |

L7809CV ELECTRICAL CHARACTERISTICS

(VI=15V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------|-----------------------|---|------|------|------|---------|
| Output Voltage | Vo | Tj=25°C, Io=5mA - 1.0A | 8.64 | 9.0 | 9.36 | V |
| | | VI =11.5V to 24V, Io=5mA - 1.0A,PD<15W | 8.55 | | 9.45 | V |
| Load Regulation | ΔV_o | Tj=25°C,Io=5mA - 1.5A | | | 90 | mV |
| | | Tj=25°C,Io=0.25A - 0.75A | | | 45 | mV |
| Line regulation | ΔV_o | VI =11.5V to 25 V, Tj=25°C, PD<15W | | | 90 | mV |
| | | VI =11.5V to 24V,Tj=25°C, Io<=1A | | | 90 | mV |
| Quiescent Current | Iq | Tj=25°C, Io=<1A | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | VI =11.5V to 24V | | | 1.0 | mA |
| | ΔI_q | Io=5mA - 1.0A | | | 0.5 | mA |
| Output Noise Voltage | VN | 10Hz<=f<=100kHz | | 58 | | μ V |
| Temperature coefficient of Vo | $\Delta V_o/\Delta T$ | Io=5mA | | -1.1 | | mV/°C |
| Ripple Rejection | RR | VI =12.5V to 22.5V, f=120Hz,Tj=25°C | 56 | 72 | | dB |
| Peak Output Current | IPK | Tj=25°C | | 1.8 | | A |
| Short-Circuit Current | Isc | VI=35V, Tj=25°C | | 250 | | mA |
| Dropout Voltage | Vd | Tj=25°C | | 2.0 | | V |

L7810CV ELECTRICAL CHARACTERISTICS

(VI=16V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------|-----------------------|---|------|------|-------|---------|
| Output Voltage | Vo | Tj=25°C, Io=5mA - 1.0A | 9.60 | 10.0 | 10.40 | V |
| | | VI =12.5V to 25V, Io=5mA - 1.0A,PD<15W | 9.50 | | 10.50 | V |
| Load Regulation | ΔV_o | Tj=25°C,Io=5mA - 1.5A | | | 100 | mV |
| | | Tj=25°C,Io=0.25A - 0.75A | | | 50 | mV |
| Line regulation | ΔV_o | VI =13V to 25V,Tj=25°C | | | 100 | mV |
| | | VI =13V to 25V, Tj=25°C,Io<=1A | | | 100 | mV |
| Quiescent Current | Iq | Tj=25°C, Io=<1A | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | VI =12.6V to 25V | | | 1.0 | mA |
| | ΔI_q | Io=5mA - 1.0A | | | 0.5 | mA |
| Output Noise Voltage | VN | 10Hz<=f<=100kHz | | 58 | | μ V |
| Temperature coefficient of Vo | $\Delta V_o/\Delta T$ | Io=5mA | | -1.1 | | mV/°C |
| Ripple Rejection | RR | VI =13V - 23V,f=120Hz,Tj=25°C | 56 | 72 | | dB |
| Peak Output Current | IPK | Tj=25°C | | 1.8 | | A |
| Short-Circuit Current | Isc | VI=35V, Tj=25°C | | 250 | | mA |
| Dropout Voltage | Vd | Tj=25°C | | 2.0 | | V |

L7812CV ELECTRICAL CHARACTERISTICS

(VI=19V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------|-----------------------|---|-------|------|-------|---------|
| Output Voltage | Vo | Tj=25°C, Io=5mA - 1.0A | 11.52 | 12.0 | 12.48 | V |
| | | VI =14.5V to 27V, Io=5mA - 1.0A,PD<15W | 11.40 | | 12.60 | V |
| Load Regulation | ΔV_o | Tj=25°C,Io=5mA - 1.5A | | | 120 | mV |
| | | Tj=25°C,Io=0.25A - 0.75A | | | 60 | mV |
| Line regulation | ΔV_o | VI =14.5V to 30V,Tj=25°C | | | 120 | mV |
| | | VI =14.6V to 27V,Tj=25°C, Io=1A | | | 120 | mV |
| Quiescent Current | Iq | Tj=25°C, Io=<1A | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | VI =14.5V to 30V | | | 1.0 | mA |
| | ΔI_q | Io=5mA - 1.0A | | | 0.5 | mA |
| Output Noise Voltage | VN | 10Hz<=f<=100kHz | | 75 | | μ V |
| Temperature coefficient of Vo | $\Delta V_o/\Delta T$ | Io=5mA | | -1.5 | | mV/°C |
| Ripple Rejection | RR | VI =15V - 25V,f=120Hz,Tj=25°C | 55 | 72 | | dB |
| Peak Output Current | IPK | Tj=25°C | | 1.8 | | A |
| Short-Circuit Current | Isc | VI=35V, Tj=25°C | | 250 | | mA |
| Dropout Voltage | Vd | Tj=25°C | | 2.0 | | V |

L7815CV ELECTRICAL CHARACTERISTICS

(VI=23V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------|-----------------------|---|-------|------|-------|---------|
| Output Voltage | Vo | Tj=25°C, Io=5mA - 1.0A | 14.40 | 15.0 | 15.60 | V |
| | | VI =17.5V to 30V, Io=5mA - 1.0A,PD<15W | 14.25 | | 15.75 | V |
| Load Regulation | ΔV_o | Tj=25°C,Io=5mA - 1.5A | | | 150 | mV |
| | | Tj=25°C,Io=0.25A - 0.75A | | | 75 | mV |
| Line regulation | ΔV_o | VI =18.5V to 30V,Tj=25°C | | | 150 | mV |
| | | VI =17.7V to 30V, Tj=25°C, Io =1A | | | 150 | mV |
| Quiescent Current | Iq | Tj=25°C, Io=<1A | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | VI =17.5V to 30V | | | 1.0 | mA |
| | ΔI_q | Io=5mA - 1.0A | | | 0.5 | mA |
| Output Noise Voltage | VN | 10Hz<=f<=100kHz | | 90 | | μ V |
| Temperature coefficient of Vo | $\Delta V_o/\Delta T$ | Io=5mA | | -1.8 | | mV/°C |
| Ripple Rejection | RR | VI =18.5V to 28.5V f=120Hz,Tj=25°C | 54 | 70 | | dB |
| Peak Output Current | IPK | Tj=25°C | | 1.8 | | A |
| Short-Circuit Current | Isc | VI=35V, Tj=25°C | | 250 | | mA |
| Dropout Voltage | Vd | Tj=25°C | | 2.0 | | V |

L7818CV ELECTRICAL CHARACTERISTICS

(VI=27V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------|-----------------------|--|-------|------|-------|----------------|
| Output Voltage | Vo | Tj=25°C, Io=5mA - 1.0A | 17.28 | 18.0 | 18.72 | V |
| | | VI =21V to 33V,Io=5mA - 1.0A | 17.10 | | 18.90 | V |
| Load Regulation | ΔV_o | Tj=25°C,Io=5mA - 1.5A | | | 180 | mV |
| | | Tj=25°C,Io=0.25A - 0.75A | | | 90 | mV |
| Line regulation | ΔV_o | VI =21V to 33V,Tj=25°C | | | 180 | mV |
| | | VI =21V to 33V, Tj=25°C, Io =<1A,PD<15W | | | 180 | mV |
| Quiescent Current | Iq | Tj=25°C, Io=<1A | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | VI =21.5V to 33V | | | 1.0 | mA |
| | ΔI_q | Io=5mA - 1.0A | | | 0.5 | mA |
| Output Noise Voltage | VN | 10Hz<=f<=100kHz | | 110 | | μ V |
| Temperature coefficient of Vo | $\Delta V_o/\Delta T$ | Io=5mA | | -2.2 | | $mV/^{\circ}C$ |
| Ripple Rejection | RR | VI =22V - 32V,f=120Hz,Tj=25°C | 53 | 69 | | dB |
| Peak Output Current | IPK | Tj=25°C | | 1.8 | | A |
| Short-Circuit Current | Isc | VI=35V, Tj=25°C | | 250 | | mA |
| Dropout Voltage | Vd | Tj=25°C | | 2.0 | | V |

L7824CV ELECTRICAL CHARACTERISTICS


(VI=33V, Io=0.5A, Tj= 0°C - 12°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------|-----------------------|-------------------------------|-------|------|-------|----------------|
| Output Voltage | Vo | Tj=25°C, Io=5mA - 1.0A | 23.04 | 24.0 | 24.96 | V |
| | | VI =27V to 38V,Io=5mA - 1.0A | 22.80 | | 25.20 | V |
| Load Regulation | ΔV_o | Tj=25°C,Io=5mA - 1.5A | | | 240 | mV |
| | | Tj=25°C,Io=0.25A - 0.75A | | | 120 | mV |
| Line regulation | ΔV_o | VI =27V to 38V,Tj=25°C | | | 240 | mV |
| | | VI =27V to 38V,Tj=25°C,Io=1A | | | 240 | mV |
| Quiescent Current | Iq | Tj=25°C, Io=<1A | | | 8.0 | mA |
| Quiescent Current Change | ΔI_q | VI =28V to 38V | | | 1.0 | mA |
| | ΔI_q | Io=5mA - 1.0A | | | 0.5 | mA |
| Output Noise Voltage | VN | 10Hz<=f<=100kHz | | 170 | | μ V |
| Temperature coefficient of Vo | $\Delta V_o/\Delta T$ | Io=5mA | | -2.8 | | $mV/^{\circ}C$ |
| Ripple Rejection | RR | VI =28V - 38V,f=120Hz,Tj=25°C | 50 | 66 | | dB |
| Peak Output Current | IPK | Tj=25°C | | 1.8 | | A |
| Short-Circuit Current | Isc | VI=35V, Tj=25°C | | 250 | | mA |
| Dropout Voltage | Vd | Tj=25°C | | 2.0 | | V |

Note 1: The Maximum steady state usable output current are dependent on input voltage, heat sinking, lead length of the package and copper pattern of PCB. The data above represents pulse test conditions with junction temperatures specified at the initiation of test.

Note 2: Power dissipation<0.5W

TO-220AB PACKAGE OUTLINE DIMENSIONS

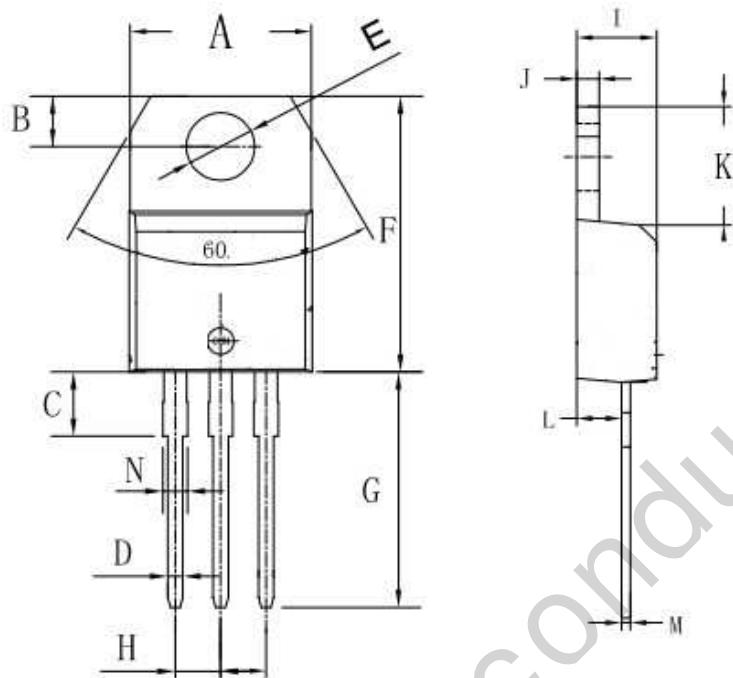

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 9.8 | 10.4 | 0.385 | 0.409 |
| B | 2.65 | 3.1 | 0.104 | 0.122 |
| C | 2.8 | 4.2 | 0.110 | 0.165 |
| D | 0.7 | 0.92 | 0.027 | 0.036 |
| E | 3.75 | 3.95 | 0.147 | 0.155 |
| F | 14.8 | 16.1 | 0.582 | 0.633 |
| G | 13.05 | 13.6 | 0.513 | 0.535 |
| H | 2.4 | 2.7 | 0.094 | 0.106 |
| I | 4.38 | 4.61 | 0.172 | 0.181 |
| J | 1.15 | 1.36 | 0.045 | 0.053 |
| K | 5.85 | 6.82 | 0.230 | 0.268 |
| L | 2.35 | 2.75 | 0.092 | 0.108 |
| M | 0.35 | 0.65 | 0.013 | 0.025 |
| N | 1.18 | 1.42 | 0.046 | 0.055 |