



**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

## FEATURES

- Output current in excess of 1.5A
- Fixed output voltage of 5V, 6V, 8V, 9V, 10V, 12V, 15V, 18V and 24V available
- Internal thermal overload protection
- Output transition Safe-Area compensation



PIN1 : IN  
PIN 2 : GND  
PIN 3 : OUT

## ABSOLUTE MAXIMUM RATINGS

( Operating temperature range applies unless otherwise specified )

| PARAMETER                                   | SYMBOL           | RATING             | UNIT |
|---------------------------------------------|------------------|--------------------|------|
| Input voltage(for Vo=5~18V)<br>(for Vo=24V) | V <sub>I</sub>   | 35                 | V    |
|                                             |                  | 40                 | V    |
| Output Current                              | I <sub>o</sub>   | 1                  | A    |
| Power Dissipation                           | PD               | Internally Limited | W    |
| Operating Junction Temperature Range        | T <sub>OPR</sub> | -20~150            | °C   |
| Storage Temperature Range                   | T <sub>STG</sub> | -55~150            | °C   |

## L7805CV ELECTRICAL CHARACTERISTICS

( V<sub>I</sub>=10V, I<sub>o</sub>=0.5A, T<sub>j</sub>= 0°C - 125°C, C<sub>1</sub>=0.33uF, C<sub>o</sub>=0.1uF, unless otherwise specified )(Note 1)

| PARAMETER                                 | SYMBOL              | TEST CONDITIONS                                                       | MIN  | TYP  | MAX  | UNIT  |
|-------------------------------------------|---------------------|-----------------------------------------------------------------------|------|------|------|-------|
| Output Voltage                            | V <sub>o</sub>      | T <sub>j</sub> =25°C, I <sub>o</sub> =5mA - 1.0A                      | 4.80 | 5.0  | 5.20 | V     |
|                                           |                     | V <sub>I</sub> =7.5V to 20V,<br>I <sub>o</sub> =5mA - 1.0A, PD<15W    | 4.75 |      | 5.25 | V     |
| Load Regulation                           | ΔV <sub>o</sub>     | T <sub>j</sub> =25°C, I <sub>o</sub> =5mA - 1.5A                      |      |      | 50   | mV    |
|                                           |                     | T <sub>j</sub> =25°C, I <sub>o</sub> =0.25A - 0.75A                   |      |      | 25   | mV    |
| Line regulation                           | ΔV <sub>o</sub>     | V <sub>I</sub> =7V to 25V, T <sub>j</sub> =25°C                       |      |      | 50   | mV    |
|                                           |                     | V <sub>I</sub> =7.5V to 20V, T <sub>j</sub> =25°C, I <sub>o</sub> =1A |      |      | 50   | mV    |
| Quiescent Current                         | I <sub>q</sub>      | T <sub>j</sub> =25°C, I <sub>o</sub> =<1A                             |      |      | 8.0  | mA    |
| Quiescent Current Change                  | ΔI <sub>q</sub>     | V <sub>I</sub> =7.5V to 20V                                           |      |      | 1.0  | mA    |
|                                           | ΔI <sub>q</sub>     | I <sub>o</sub> =5mA - 1.0A                                            |      |      | 0.5  | mA    |
| Output Noise Voltage                      | V <sub>N</sub>      | 10Hz<=f<=100kHz                                                       |      | 40   |      | μV    |
| Temperature coefficient of V <sub>o</sub> | ΔV <sub>o</sub> /ΔT | I <sub>o</sub> =5mA                                                   |      | -0.6 |      | mV/°C |
| Ripple Rejection                          | RR                  | V <sub>I</sub> =8V - 18V, f=120Hz, T <sub>j</sub> =25°C               | 62   | 80   |      | dB    |
| Peak Output Current                       | I <sub>PK</sub>     | T <sub>j</sub> =25°C                                                  |      | 1.8  |      | A     |
| Short-Circuit Current                     | I <sub>sc</sub>     | V <sub>I</sub> =35V, T <sub>j</sub> =25°C                             |      | 250  |      | mA    |
| Dropout Voltage                           | V <sub>d</sub>      | T <sub>j</sub> =25°C                                                  |      | 2.0  |      | V     |

### L7806CV ELECTRICAL CHARACTERISTICS

( $V_I=11V$ ,  $I_o=0.5A$ ,  $T_j=0^{\circ}C - 125^{\circ}C$ ,  $C_1=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified )(Note 1)

| PARAMETER                        | SYMBOL                | TEST CONDITIONS                                      | MIN  | TYP  | MAX  | UNIT            |
|----------------------------------|-----------------------|------------------------------------------------------|------|------|------|-----------------|
| Output Voltage                   | $V_o$                 | $T_j=25^{\circ}C$ , $I_o=5mA - 1.0A$                 | 5.76 | 6.0  | 6.24 | V               |
|                                  |                       | $V_I=8.5V$ to $21V$ ,<br>$I_o=5mA - 1.0A$ , $PD<15W$ | 5.70 |      | 6.30 | V               |
| Load Regulation                  | $\Delta V_o$          | $T_j=25^{\circ}C$ , $I_o=5mA - 1.5A$                 |      |      | 60   | mV              |
|                                  |                       | $T_j=25^{\circ}C$ , $I_o=0.25A - 0.75A$              |      |      | 30   | mV              |
| Line regulation                  | $\Delta V_o$          | $V_I=8V$ to $25V$ , $T_j=25^{\circ}C$                |      |      | 60   | mV              |
|                                  |                       | $V_I=8.5V$ to $21V$ , $T_j=25^{\circ}C$ , $I_o=1A$   |      |      | 60   | mV              |
| Quiescent Current                | $I_q$                 | $T_j=25^{\circ}C$ , $I_o<1A$                         |      |      | 8.0  | mA              |
| Quiescent Current Change         | $\Delta I_q$          | $V_I=8.5V$ to $21V$                                  |      |      | 1.0  | mA              |
|                                  | $\Delta I_q$          | $I_o=5mA - 1.0A$                                     |      |      | 0.5  | mA              |
| Output Noise Voltage             | $V_N$                 | $10Hz \leq f \leq 100kHz$                            |      | 45   |      | $\mu V$         |
| Temperature coefficient of $V_o$ | $\Delta V_o/\Delta T$ | $I_o=5mA$                                            |      | -0.7 |      | mV/ $^{\circ}C$ |
| Ripple Rejection                 | RR                    | $V_I=9V - 19V$ , $f=120Hz$ , $T_j=25^{\circ}C$       | 59   | 75   |      | dB              |
| Peak Output Current              | $I_{PK}$              | $T_j=25^{\circ}C$                                    |      | 1.8  |      | A               |
| Short-Circuit Current            | $I_{SC}$              | $V_I=35V$ , $T_j=25^{\circ}C$                        |      | 250  |      | mA              |
| Dropout Voltage                  | $V_d$                 | $T_j=25^{\circ}C$                                    |      | 2.0  |      | V               |

### L7808CV ELECTRICAL CHARACTERISTICS

( $V_I=14V$ ,  $I_o=0.5A$ ,  $T_j=0^{\circ}C - 125^{\circ}C$ ,  $C_1=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified )(Note 1)

| PARAMETER                        | SYMBOL                | TEST CONDITIONS                                           | MIN  | TYP  | MAX  | UNIT            |
|----------------------------------|-----------------------|-----------------------------------------------------------|------|------|------|-----------------|
| Output Voltage                   | $V_o$                 | $T_j=25^{\circ}C$ , $I_o=5mA - 1.0A$                      | 7.68 | 8.0  | 8.32 | V               |
|                                  |                       | $V_I=10.5V$ to $23V$ ,<br>$I_o=5mA - 1.0A$ , $PD<15W$     | 7.60 |      | 8.40 | V               |
| Load Regulation                  | $\Delta V_o$          | $T_j=25^{\circ}C$ , $I_o=5mA - 1.5A$                      |      |      | 80   | mV              |
|                                  |                       | $T_j=25^{\circ}C$ , $I_o=0.25A - 0.75A$                   |      |      | 40   | mV              |
| Line regulation                  | $\Delta V_o$          | $V_I=10.5V$ to $25V$ , $T_j=25^{\circ}C$                  |      |      | 80   | mV              |
|                                  |                       | $V_I=10.5V$ to $23V$ , $T_j=25^{\circ}C$ , $I_o=1A$       |      |      | 80   | mV              |
| Quiescent Current                | $I_q$                 | $T_j=25^{\circ}C$ , $I_o<1A$                              |      |      | 8.0  | mA              |
| Quiescent Current Change         | $\Delta I_q$          | $V_I=10.5V$ to $23V$                                      |      |      | 1.0  | mA              |
|                                  | $\Delta I_q$          | $I_o=5mA - 1.0A$                                          |      |      | 0.5  | mA              |
| Output Noise Voltage             | $V_N$                 | $10Hz \leq f \leq 100kHz$                                 |      | 58   |      | $\mu V$         |
| Temperature coefficient of $V_o$ | $\Delta V_o/\Delta T$ | $I_o=5mA$                                                 |      | -0.9 |      | mV/ $^{\circ}C$ |
| Ripple Rejection                 | RR                    | $V_I=11.5V$ to $21.5V$ ,<br>$f=120Hz$ , $T_j=25^{\circ}C$ | 56   | 72   |      | dB              |
| Peak Output Current              | $I_{PK}$              | $T_j=25^{\circ}C$                                         |      | 1.8  |      | A               |
| Short-Circuit Current            | $I_{SC}$              | $V_I=35V$ , $T_j=25^{\circ}C$                             |      | 250  |      | mA              |
| Dropout Voltage                  | $V_d$                 | $T_j=25^{\circ}C$                                         |      | 2.0  |      | V               |

**L7809CV ELECTRICAL CHARACTERISTICS**

( $V_I=15V$ ,  $I_o=0.5A$ ,  $T_j=0^{\circ}C - 125^{\circ}C$ ,  $C_1=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified)(Note 1)

| PARAMETER                        | SYMBOL                | TEST CONDITIONS                                            | MIN  | TYP  | MAX  | UNIT            |
|----------------------------------|-----------------------|------------------------------------------------------------|------|------|------|-----------------|
| Output Voltage                   | $V_o$                 | $T_j=25^{\circ}C$ , $I_o=5mA - 1.0A$                       | 8.64 | 9.0  | 9.36 | V               |
|                                  |                       | $V_I=11.5V$ to $24V$ ,<br>$I_o=5mA - 1.0A$ , $P_D<15W$     | 8.55 |      | 9.45 | V               |
| Load Regulation                  | $\Delta V_o$          | $T_j=25^{\circ}C$ , $I_o=5mA - 1.5A$                       |      |      | 90   | mV              |
|                                  |                       | $T_j=25^{\circ}C$ , $I_o=0.25A - 0.75A$                    |      |      | 45   | mV              |
| Line regulation                  | $\Delta V_o$          | $V_I=11.5V$ to $25V$ ,<br>$T_j=25^{\circ}C$ , $P_D<15W$    |      |      | 90   | mV              |
|                                  |                       | $V_I=11.5V$ to $24V$ , $T_j=25^{\circ}C$ ,<br>$I_o\leq 1A$ |      |      | 90   | mV              |
| Quiescent Current                | $I_q$                 | $T_j=25^{\circ}C$ , $I_o\leq 1A$                           |      |      | 8.0  | mA              |
| Quiescent Current Change         | $\Delta I_q$          | $V_I=11.5V$ to $24V$                                       |      |      | 1.0  | mA              |
|                                  | $\Delta I_q$          | $I_o=5mA - 1.0A$                                           |      |      | 0.5  | mA              |
| Output Noise Voltage             | $V_N$                 | $10Hz\leq f\leq 100kHz$                                    |      | 58   |      | $\mu V$         |
| Temperature coefficient of $V_o$ | $\Delta V_o/\Delta T$ | $I_o=5mA$                                                  |      | -1.1 |      | mV/ $^{\circ}C$ |
| Ripple Rejection                 | RR                    | $V_I=12.5V$ to $22.5V$ ,<br>$f=120Hz$ , $T_j=25^{\circ}C$  | 56   | 72   |      | dB              |
| Peak Output Current              | $I_{PK}$              | $T_j=25^{\circ}C$                                          |      | 1.8  |      | A               |
| Short-Circuit Current            | $I_{SC}$              | $V_I=35V$ , $T_j=25^{\circ}C$                              |      | 250  |      | mA              |
| Dropout Voltage                  | $V_d$                 | $T_j=25^{\circ}C$                                          |      | 2.0  |      | V               |

**L7810CV ELECTRICAL CHARACTERISTICS**

( $V_I=16V$ ,  $I_o=0.5A$ ,  $T_j=0^{\circ}C - 125^{\circ}C$ ,  $C_1=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified)(Note 1)

| PARAMETER                        | SYMBOL                | TEST CONDITIONS                                            | MIN  | TYP  | MAX   | UNIT            |
|----------------------------------|-----------------------|------------------------------------------------------------|------|------|-------|-----------------|
| Output Voltage                   | $V_o$                 | $T_j=25^{\circ}C$ , $I_o=5mA - 1.0A$                       | 9.60 | 10.0 | 10.40 | V               |
|                                  |                       | $V_I=12.5V$ to $25V$ ,<br>$I_o=5mA - 1.0A$ , $P_D\leq 15W$ | 9.50 |      | 10.50 | V               |
| Load Regulation                  | $\Delta V_o$          | $T_j=25^{\circ}C$ , $I_o=5mA - 1.5A$                       |      |      | 100   | mV              |
|                                  |                       | $T_j=25^{\circ}C$ , $I_o=0.25A - 0.75A$                    |      |      | 50    | mV              |
| Line regulation                  | $\Delta V_o$          | $V_I=13V$ to $25V$ , $T_j=25^{\circ}C$                     |      |      | 100   | mV              |
|                                  |                       | $V_I=13V$ to $25V$ ,<br>$T_j=25^{\circ}C$ , $I_o\leq 1A$   |      |      | 100   | mV              |
| Quiescent Current                | $I_q$                 | $T_j=25^{\circ}C$ , $I_o\leq 1A$                           |      |      | 8.0   | mA              |
| Quiescent Current Change         | $\Delta I_q$          | $V_I=12.6V$ to $25V$                                       |      |      | 1.0   | mA              |
|                                  | $\Delta I_q$          | $I_o=5mA - 1.0A$                                           |      |      | 0.5   | mA              |
| Output Noise Voltage             | $V_N$                 | $10Hz\leq f\leq 100kHz$                                    |      | 58   |       | $\mu V$         |
| Temperature coefficient of $V_o$ | $\Delta V_o/\Delta T$ | $I_o=5mA$                                                  |      | -1.1 |       | mV/ $^{\circ}C$ |
| Ripple Rejection                 | RR                    | $V_I=13V - 23V$ , $f=120Hz$ , $T_j=25^{\circ}C$            | 56   | 72   |       | dB              |
| Peak Output Current              | $I_{PK}$              | $T_j=25^{\circ}C$                                          |      | 1.8  |       | A               |
| Short-Circuit Current            | $I_{SC}$              | $V_I=35V$ , $T_j=25^{\circ}C$                              |      | 250  |       | mA              |
| Dropout Voltage                  | $V_d$                 | $T_j=25^{\circ}C$                                          |      | 2.0  |       | V               |

### L7812CV ELECTRICAL CHARACTERISTICS

( $V_I=19V$ ,  $I_o=0.5A$ ,  $T_j=0^{\circ}C - 125^{\circ}C$ ,  $C_1=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified)(Note 1)

| PARAMETER                        | SYMBOL                | TEST CONDITIONS                                        | MIN   | TYP  | MAX   | UNIT            |
|----------------------------------|-----------------------|--------------------------------------------------------|-------|------|-------|-----------------|
| Output Voltage                   | $V_o$                 | $T_j=25^{\circ}C$ , $I_o=5mA - 1.0A$                   | 11.52 | 12.0 | 12.48 | V               |
|                                  |                       | $V_I=14.5V$ to $27V$ ,<br>$I_o=5mA - 1.0A$ , $PD<15W$  | 11.40 |      | 12.60 | V               |
| Load Regulation                  | $\Delta V_o$          | $T_j=25^{\circ}C$ , $I_o=5mA - 1.5A$                   |       |      | 120   | mV              |
|                                  |                       | $T_j=25^{\circ}C$ , $I_o=0.25A - 0.75A$                |       |      | 60    | mV              |
| Line regulation                  | $\Delta V_o$          | $V_I=14.5V$ to $30V$ , $T_j=25^{\circ}C$               |       |      | 120   | mV              |
|                                  |                       | $V_I=14.6V$ to $27V$ , $T_j=25^{\circ}C$ ,<br>$I_o=1A$ |       |      | 120   | mV              |
| Quiescent Current                | $I_q$                 | $T_j=25^{\circ}C$ , $I_o<1A$                           |       |      | 8.0   | mA              |
| Quiescent Current Change         | $\Delta I_q$          | $V_I=14.5V$ to $30V$                                   |       |      | 1.0   | mA              |
|                                  | $\Delta I_q$          | $I_o=5mA - 1.0A$                                       |       |      | 0.5   | mA              |
| Output Noise Voltage             | $V_N$                 | $10Hz \leq f \leq 100kHz$                              |       | 75   |       | $\mu V$         |
| Temperature coefficient of $V_o$ | $\Delta V_o/\Delta T$ | $I_o=5mA$                                              |       | -1.5 |       | mV/ $^{\circ}C$ |
| Ripple Rejection                 | RR                    | $V_I=15V - 25V$ , $f=120Hz$ , $T_j=25^{\circ}C$        | 55    | 72   |       | dB              |
| Peak Output Current              | $I_{PK}$              | $T_j=25^{\circ}C$                                      |       | 1.8  |       | A               |
| Short-Circuit Current            | $I_{SC}$              | $V_I=35V$ , $T_j=25^{\circ}C$                          |       | 250  |       | mA              |
| Dropout Voltage                  | $V_d$                 | $T_j=25^{\circ}C$                                      |       | 2.0  |       | V               |

### L7815CV ELECTRICAL CHARACTERISTICS

( $V_I=23V$ ,  $I_o=0.5A$ ,  $T_j=0^{\circ}C - 125^{\circ}C$ ,  $C_1=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified)(Note 1)

| PARAMETER                        | SYMBOL                | TEST CONDITIONS                                         | MIN   | TYP  | MAX   | UNIT            |
|----------------------------------|-----------------------|---------------------------------------------------------|-------|------|-------|-----------------|
| Output Voltage                   | $V_o$                 | $T_j=25^{\circ}C$ , $I_o=5mA - 1.0A$                    | 14.40 | 15.0 | 15.60 | V               |
|                                  |                       | $V_I=17.5V$ to $30V$ ,<br>$I_o=5mA - 1.0A$ , $PD<15W$   | 14.25 |      | 15.75 | V               |
| Load Regulation                  | $\Delta V_o$          | $T_j=25^{\circ}C$ , $I_o=5mA - 1.5A$                    |       |      | 150   | mV              |
|                                  |                       | $T_j=25^{\circ}C$ , $I_o=0.25A - 0.75A$                 |       |      | 75    | mV              |
| Line regulation                  | $\Delta V_o$          | $V_I=18.5V$ to $30V$ , $T_j=25^{\circ}C$                |       |      | 150   | mV              |
|                                  |                       | $V_I=17.7V$ to $30V$ ,<br>$T_j=25^{\circ}C$ , $I_o=1A$  |       |      | 150   | mV              |
| Quiescent Current                | $I_q$                 | $T_j=25^{\circ}C$ , $I_o<1A$                            |       |      | 8.0   | mA              |
| Quiescent Current Change         | $\Delta I_q$          | $V_I=17.5V$ to $30V$                                    |       |      | 1.0   | mA              |
|                                  | $\Delta I_q$          | $I_o=5mA - 1.0A$                                        |       |      | 0.5   | mA              |
| Output Noise Voltage             | $V_N$                 | $10Hz \leq f \leq 100kHz$                               |       | 90   |       | $\mu V$         |
| Temperature coefficient of $V_o$ | $\Delta V_o/\Delta T$ | $I_o=5mA$                                               |       | -1.8 |       | mV/ $^{\circ}C$ |
| Ripple Rejection                 | RR                    | $V_I=18.5V$ to $28.5V$<br>$f=120Hz$ , $T_j=25^{\circ}C$ | 54    | 70   |       | dB              |
| Peak Output Current              | $I_{PK}$              | $T_j=25^{\circ}C$                                       |       | 1.8  |       | A               |
| Short-Circuit Current            | $I_{SC}$              | $V_I=35V$ , $T_j=25^{\circ}C$                           |       | 250  |       | mA              |
| Dropout Voltage                  | $V_d$                 | $T_j=25^{\circ}C$                                       |       | 2.0  |       | V               |

### L7818CV ELECTRICAL CHARACTERISTICS

( $V_I=27V$ ,  $I_o=0.5A$ ,  $T_j=0^{\circ}C - 125^{\circ}C$ ,  $C_1=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified )(Note 1)

| PARAMETER                        | SYMBOL                  | TEST CONDITIONS                                                         | MIN   | TYP  | MAX   | UNIT            |
|----------------------------------|-------------------------|-------------------------------------------------------------------------|-------|------|-------|-----------------|
| Output Voltage                   | $V_o$                   | $T_j=25^{\circ}C$ , $I_o=5mA - 1.0A$                                    | 17.28 | 18.0 | 18.72 | V               |
|                                  |                         | $V_I=21V$ to $33V$ , $I_o=5mA - 1.0A$                                   | 17.10 |      | 18.90 | V               |
| Load Regulation                  | $\Delta V_o$            | $T_j=25^{\circ}C$ , $I_o=5mA - 1.5A$                                    |       |      | 180   | mV              |
|                                  |                         | $T_j=25^{\circ}C$ , $I_o=0.25A - 0.75A$                                 |       |      | 90    | mV              |
| Line regulation                  | $\Delta V_o$            | $V_I=21V$ to $33V$ , $T_j=25^{\circ}C$                                  |       |      | 180   | mV              |
|                                  |                         | $V_I=21V$ to $33V$ ,<br>$T_j=25^{\circ}C$ , $I_o \leq 1A$ , $P_D < 15W$ |       |      | 180   | mV              |
| Quiescent Current                | $I_q$                   | $T_j=25^{\circ}C$ , $I_o \leq 1A$                                       |       |      | 8.0   | mA              |
| Quiescent Current Change         | $\Delta I_q$            | $V_I=21.5V$ to $33V$                                                    |       |      | 1.0   | mA              |
|                                  | $\Delta I_q$            | $I_o=5mA - 1.0A$                                                        |       |      | 0.5   | mA              |
| Output Noise Voltage             | $V_N$                   | $10Hz \leq f \leq 100kHz$                                               |       | 110  |       | $\mu V$         |
| Temperature coefficient of $V_o$ | $\Delta V_o / \Delta T$ | $I_o=5mA$                                                               |       | -2.2 |       | mV/ $^{\circ}C$ |
| Ripple Rejection                 | RR                      | $V_I=22V - 32V$ , $f=120Hz$ , $T_j=25^{\circ}C$                         | 53    | 69   |       | dB              |
| Peak Output Current              | $I_{PK}$                | $T_j=25^{\circ}C$                                                       |       | 1.8  |       | A               |
| Short-Circuit Current            | $I_{SC}$                | $V_I=35V$ , $T_j=25^{\circ}C$                                           |       | 250  |       | mA              |
| Dropout Voltage                  | $V_d$                   | $T_j=25^{\circ}C$                                                       |       | 2.0  |       | V               |

### L7824CV ELECTRICAL CHARACTERISTICS


( $V_I=33V$ ,  $I_o=0.5A$ ,  $T_j=0^{\circ}C - 12^{\circ}C$ ,  $C_1=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified )(Note 1)

| PARAMETER                        | SYMBOL                  | TEST CONDITIONS                                   | MIN   | TYP  | MAX   | UNIT            |
|----------------------------------|-------------------------|---------------------------------------------------|-------|------|-------|-----------------|
| Output Voltage                   | $V_o$                   | $T_j=25^{\circ}C$ , $I_o=5mA - 1.0A$              | 23.04 | 24.0 | 24.96 | V               |
|                                  |                         | $V_I=27V$ to $38V$ , $I_o=5mA - 1.0A$             | 22.80 |      | 25.20 | V               |
| Load Regulation                  | $\Delta V_o$            | $T_j=25^{\circ}C$ , $I_o=5mA - 1.5A$              |       |      | 240   | mV              |
|                                  |                         | $T_j=25^{\circ}C$ , $I_o=0.25A - 0.75A$           |       |      | 120   | mV              |
| Line regulation                  | $\Delta V_o$            | $V_I=27V$ to $38V$ , $T_j=25^{\circ}C$            |       |      | 240   | mV              |
|                                  |                         | $V_I=27V$ to $38V$ , $T_j=25^{\circ}C$ , $I_o=1A$ |       |      | 240   | mV              |
| Quiescent Current                | $I_q$                   | $T_j=25^{\circ}C$ , $I_o \leq 1A$                 |       |      | 8.0   | mA              |
| Quiescent Current Change         | $\Delta I_q$            | $V_I=28V$ to $38V$                                |       |      | 1.0   | mA              |
|                                  | $\Delta I_q$            | $I_o=5mA - 1.0A$                                  |       |      | 0.5   | mA              |
| Output Noise Voltage             | $V_N$                   | $10Hz \leq f \leq 100kHz$                         |       | 170  |       | $\mu V$         |
| Temperature coefficient of $V_o$ | $\Delta V_o / \Delta T$ | $I_o=5mA$                                         |       | -2.8 |       | mV/ $^{\circ}C$ |
| Ripple Rejection                 | RR                      | $V_I=28V - 38V$ , $f=120Hz$ , $T_j=25^{\circ}C$   | 50    | 66   |       | dB              |
| Peak Output Current              | $I_{PK}$                | $T_j=25^{\circ}C$                                 |       | 1.8  |       | A               |
| Short-Circuit Current            | $I_{SC}$                | $V_I=35V$ , $T_j=25^{\circ}C$                     |       | 250  |       | mA              |
| Dropout Voltage                  | $V_d$                   | $T_j=25^{\circ}C$                                 |       | 2.0  |       | V               |

Note 1: The Maximum steady state usable output current are dependent on input voltage, heat sinking, lead length of the package and copper pattern of PCB. The data above represents pulse test conditions with junction temperatures specified at the initiation of test.

Note 2: Power dissipation  $< 0.5W$

TO-220AB PACKAGE OUTLINE DIMENSIONS

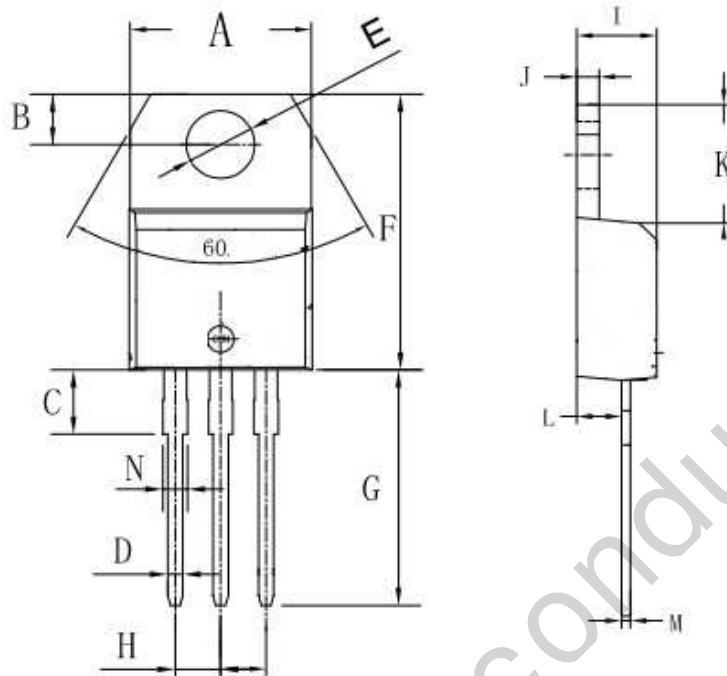

| Symbol | Dimensions In Millimeters |      | Dimensions In Inches |       |
|--------|---------------------------|------|----------------------|-------|
|        | Min                       | Max  | Min                  | Max   |
| A      | 9.8                       | 10.4 | 0.385                | 0.409 |
| B      | 2.65                      | 3.1  | 0.104                | 0.122 |
| C      | 2.8                       | 4.2  | 0.110                | 0.165 |
| D      | 0.7                       | 0.92 | 0.027                | 0.036 |
| E      | 3.75                      | 3.95 | 0.147                | 0.155 |
| F      | 14.8                      | 16.1 | 0.582                | 0.633 |
| G      | 13.05                     | 13.6 | 0.513                | 0.535 |
| H      | 2.4                       | 2.7  | 0.094                | 0.106 |
| I      | 4.38                      | 4.61 | 0.172                | 0.181 |
| J      | 1.15                      | 1.36 | 0.045                | 0.053 |
| K      | 5.85                      | 6.82 | 0.230                | 0.268 |
| L      | 2.35                      | 2.75 | 0.092                | 0.108 |
| M      | 0.35                      | 0.65 | 0.013                | 0.025 |
| N      | 1.18                      | 1.42 | 0.046                | 0.055 |