




**EN:** This Datasheet is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).

PRODUCT MODEL	DESCRIPTION
<b>S677WVT</b>	<b>RG6 COAXIAL CABLE 77% WHITE PVC TRISHIELD CCS</b>
APPLICATION	Installation cable, used in professional networks, distributing TV signal and also applied as an aerial cable for terrestrial and satellite broadcast systems.

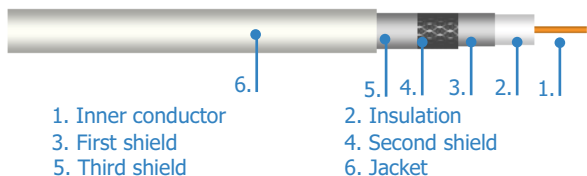

CONSTRUCTION MATERIALS			MECHANICAL PROPERTIES			
Inner conductor	Material	Copper clad steel [CCS]	Min. bending radius, mm	35		
	Diameter, mm	1.02 ±0.01				
Insulation	Material	Physical foamed PE	ELECTRICAL PROPERTIES			
	Diameter, mm	4.57 ±0.13	Inner conductor DC resistance, Ω /km	100		
Outer conductor	First shield	AL/PET tape bonded	Outer conductor DC resistance, Ω /km	18		
			Characteristic impedance ,Ω	75 ±2		
			Capacitance, pF/m	53.2		
	Second shield	Aluminium braid, coverage 77%	Propagation velocity, %	85		
	Third shield	AL/PET/AL tape				
Fourth shield	-					
Jacket	Material	PVC				
	Diameter, mm	7.06± 0.20				
Reference weight	kg/100m	4.84				
MAXIMUM ATTENUATION					SHIELDING EFFECTIVENESS, dB	
Frequency, MHz		Maximum attenuation @20 °C, dB/100m			30~1000 MHz	15 ~ 1200 MHz
5		1.90			-	≥97
55		5.25				
211		10.0			RoH S	
350		12.63	Compliant with the RoHS 2011/65/EU			
450		14.43	ORDERING INFORMATION			
600		16.73	Available lenghts	Available colours		
862		20.23	305 m	White		
1000		21.49				
1218		23.99				
2150		-				
3000		-				