

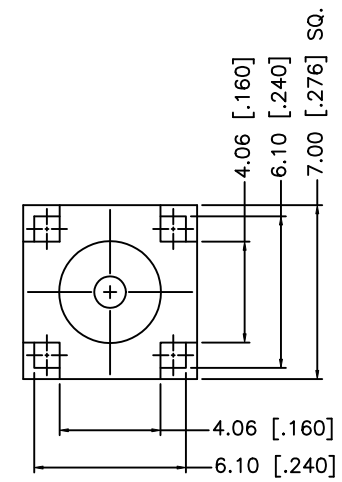
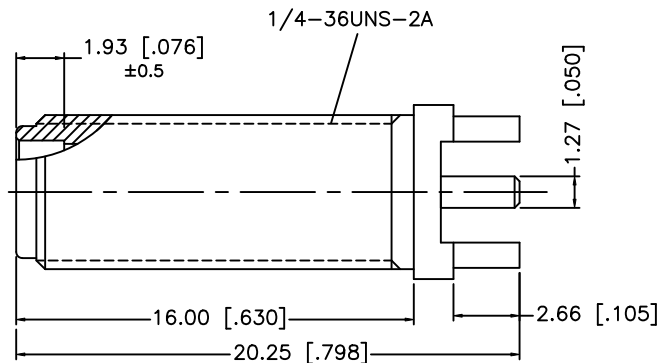


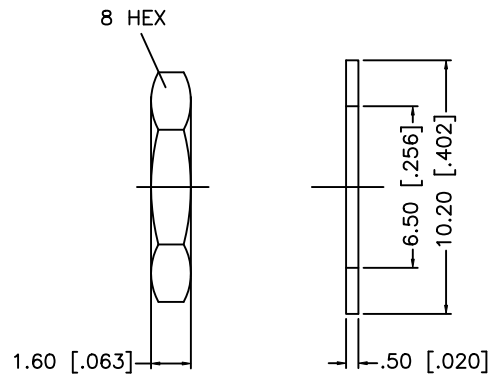

EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

REV.	DATE	ECR NO.	DESCRIPTION
NC	12/12/05	—	INITIAL RELEASE
A	10/14/08	—	REVISE OVERALL LENGTH TO 20.25

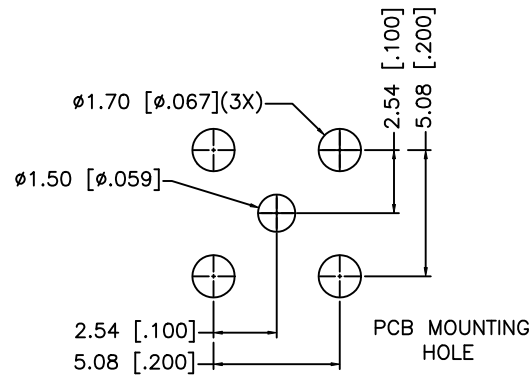

NOTE:

1. MAX. PANEL THICKNESS = 7.5mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex										
8						DRAWN	GRS	10/14/08												
7						CHECKED														
6											PART DESCRIPTION									
5	HEX NUT	BRASS	GOLD	1							SMA BULKHEAD P.C. MOUNT JACK									
4	LOCK WASHER	BRASS	GOLD	1																
3	CONTACT PIN	BER. COPPER	GOLD	1																
2	INSULATOR	PTFE	NATURAL	1							PART NO.									
1	BODY	BRASS	GOLD	1						132291-12										
DESCRIPTION					MATERIAL		FINISH		QTY		CAD FILE		DWG. NO.		REV.		SIZE		SCALE	
											C:/132/132291-12.DWG		132291-12.DWG		A		A		NA	