






**EN:** This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at [www.hestore.hu](http://www.hestore.hu).






|                       |                                                                                                          |                                                                                    |                                                                                     |
|-----------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Rating                | 16A 125VAC, 10A 250VAC  | Mounting Hole                                                                      |                                                                                     |
|                       | 10(4)A 250V~            |  |  |
| Contact Resistance    | 50m ohm Max.                                                                                             | Thickness: 1.5~2.5                                                                 |                                                                                     |
| Insulation Resistance | DC 500V 100M ohm Min.                                                                                    |                                                                                    |                                                                                     |
| Dielectric Strength   | AC 1500V 1 minute                                                                                        |                                                                                    |                                                                                     |
| Operation Temperature | -25°C~85°C                                                                                               |                                                                                    |                                                                                     |
| Switch Function       | 3P SPST ON-OFF(Illuminated)                                                                              |                                                                                    |                                                                                     |

**\*MATERIAL:**

Frame: Nylon 66, Black  
 Actuator: PC, Blue Clear  
 Waterproof rubber: Silicone  
 Hot Stamping: None  
 Waterproof: IP65



**Circuit Diagram**

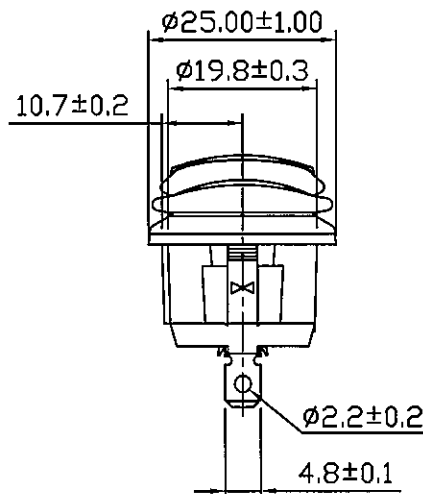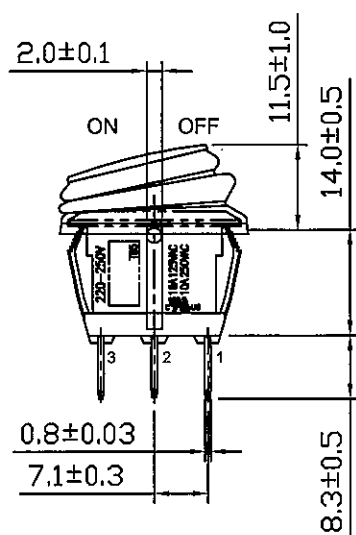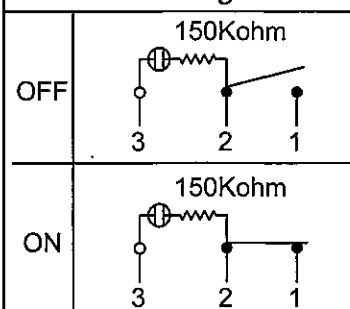

C8/R13/R13-112B8-02

|          |  |         |  |             |  |              |  |         |  |                                |  |               |  |     |  |
|----------|--|---------|--|-------------|--|--------------|--|---------|--|--------------------------------|--|---------------|--|-----|--|
|          |  |         |  |             |  |              |  | △       |  |                                |  |               |  |     |  |
|          |  |         |  |             |  |              |  | △       |  |                                |  |               |  |     |  |
| Date     |  | Name    |  | Description |  |              |  | NO      |  |                                |  |               |  |     |  |
| Drawn    |  | Checked |  | Approved    |  | SCI BOM NO.  |  | 1825628 |  | Model Name                     |  | ROCKER SWITCH |  |     |  |
| 曹盈芳      |  |         |  | EAB         |  | Customer No. |  |         |  | Model No.                      |  | R13-112B8-02  |  | Rev |  |
| 04/09/13 |  |         |  | 4/10/13     |  | Unit         |  | mm      |  | Shin Chin Industrial Co., Ltd. |  |               |  | 0   |  |