



EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

Plug-in sockets and accessories


EC 35

For RM87N, RM87N sensitive, RM92


For PCB
31,3 x 12,7 x 9 mm
One pole, 3,5 mm pinout
12 A, 300 V AC



Pinout



Dimensions




GD35

For RM87N, RM87N sensitive, RM92


For PCB
31,5 x 13 x 9 mm
One pole, 3,5 mm pinout
12 A, 300 V AC



Pinout




Dimensions

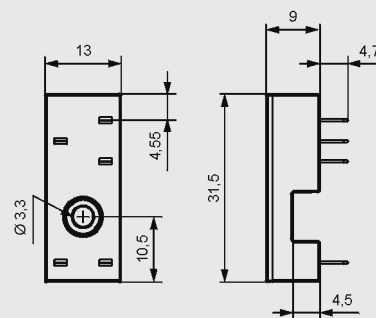




ES 32

For RM96 1 CO


Screw terminals
Max. tightening moment
for the terminal: 0,7 Nm
35 mm rail mount
acc. to PN-EN 60715 or on panel
mounting
75 x 15,5 x 42,5(59) mm ②
One pole, 3,2 mm pinout
12 A, 300 V AC



Connection diagrams




Dimensions

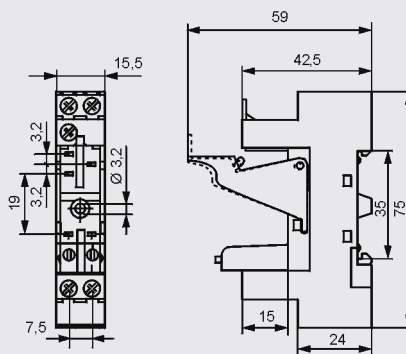


EC 32


For PCB
31 x 12,7 x 9 mm
One pole, 3,2 mm pinout
12 A, 300 V AC



Pinout



Dimensions



① Mounting and sub-assemblies of accessories in the socket - see page 9. Signalling / protecting modules type M... - see page 20.
② In the bracket the height of socket with retainer / retractor clip is shown.