



EN: This Datasheet/Document is presented by the manufacturer.


Please visit our website for pricing and availability at www.hestore.hu.

Bimetallic thermostats for temperature control - when temperature exceeds threshold the contact opens. After temperature decrease below threshold the contact closes again.



Thermostats with vertical connectors have movable yoke enabling easy mounting on flat surface.

Thermostats with horizontal connectors have fixed yoke - mounting to a surface by means of distance bushes.

Max voltage	: 250 V AC
Max current	: 10 A
Terminations	: 6,3 mm plug-on connectors
Contacts	: NC - normal close

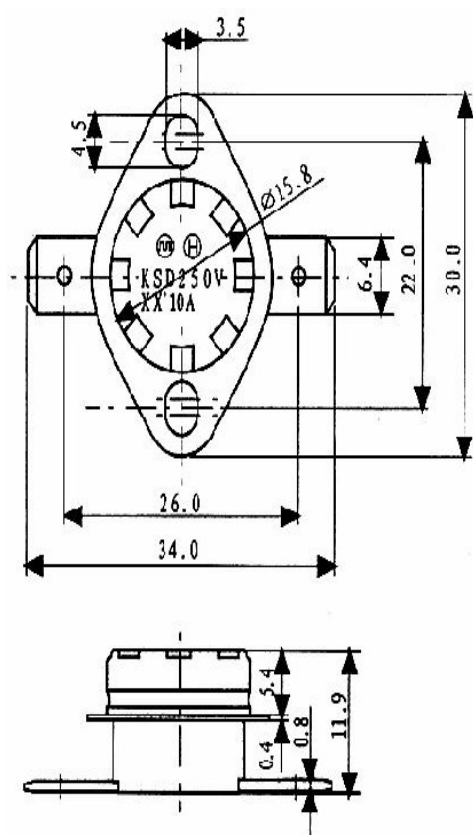

Horizontal
plug-on connectors

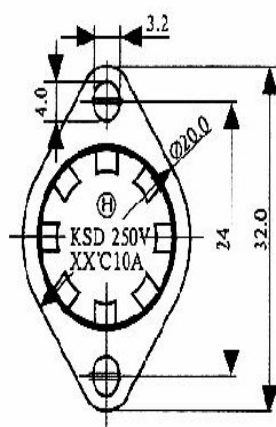

Vertical
plug-on
connectors

Symbol	Opening Temperature [°C]	Closing temperature [°C]	Terminations
BT-H70H	70±3	55±5	horizontal
BT-H80H	80±3	60±7	horizontal
BT-H100H	100±3	70±10	horizontal
BT-H160H	160±10	130±15	horizontal
BT-H70V	70±3	55±5	vertical
BT-H80V	80±3	60±7	vertical
BT-H100V	100±3	70±10	vertical
BT-H160V	160±10	130±15	vertical