




EN: This Datasheet/Document is presented by the manufacturer.

Please visit our website for pricing and availability at www.hestore.hu.

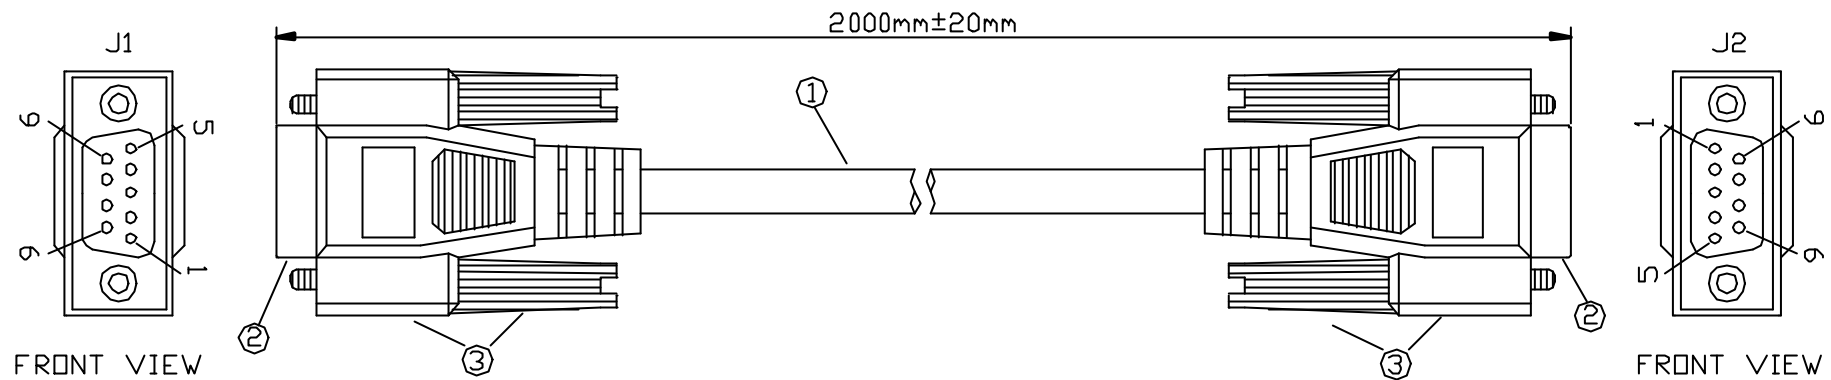

- 1.CABLE:NO UL.,28AWG(7/0.127),TINNED AND STRANDED COPPER WIRE
 INSULATOR:PVC,ID:0.85mm ,CABLING:9C+DRAIN WIRE
 SHIELD:AL/MY COVERAGE
 JACKET:PVC,COMPLIANCE ROHS,COLOR:BEIGE,D.D:5mm
 2.PCS CONNECTOR:D-SUB 9 WAYS FEMALE SOLDER TYPE CONNECTOR
 INSULATOR:P.B.T.+GLASS FIBER,COLOR:BLUE
 CONTACT:COPPER ALLOY,GOLD FLASH OVER NICKEL PLATED
 SHELL:NICKEL PLATED,
 CONNECTOR COMPLIANCE ROHS
 3.HOOD:PVC MOLDED TYPE WITH FOIL SHIELDED ON INNER
 ON INNER MOLD AND INJECTION OUTER MOLD WITH
 THUMB SCREW#4-40 UNC
 COLOR:BEIGE,COMPLIANCE ROHS
 4 Fulfill ROHS Guideline
 5.ELECTRONIC TEST:100% OPEN SHORT+MISS WIRE TEST

PIN OUT

DB9PIN FEMALE(J1)	WIRE	DB9PIN FEMALE(J2)
1	—————	1
2	—————	2
3	—————	3
4	—————	4
5	—————	5
6	—————	6
7	—————	7
8	—————	8
9	—————	9
SHELL	DRAIN WIRE	SHELL

PART NO	CAB-09GG/2	SHEET NO	1	THIRD ANGLE PROJECTION
TITLE: DB9 PIN FEMALE TO DB9 PIN FEMALE BEIGE COLOR,L:2M				SCALE N.T.S
				SIZE A4
				UNIT
DWN NO				APPROVED BY & DATE
				mm INCH

